Draft Report



केंद्रीय भूमि जल बोर्ड

जल संसाधन, नदी विकास और गंगा संरक्षण मंत्रालय

भारत सरकार

Central Ground Water Board

Ministry of Water Resources, River Development and Ganga Rejuvenation Government of India

Report on

AQUIFER MAPS AND MANAGEMENT PLAN


Mangrol, Junagarh District, Gujarat

पश्चिमी मध्य क्षेत्र, अहमदाबाद West Central Region, Ahmedabad



भारत सरकार जल संसाधन, नदी विकास एवम् गंगा संरक्षण मंत्रालय केंद्रीय भूमि जल बोर्ड

GOVERNMENT OF INDIA MINISTRY OF WATER RESOURCES, RIVER DEVELOPMENT AND GANGA REJUVENATION

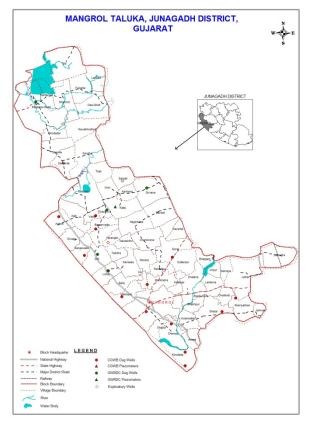

REPORT ON


AQUIFER MAPS & MANAGEMENT PLANS MANGROL TALUKA, JUNAGADH DISTRICT, GUJARAT STATE

CENTRAL GROUND WATER BOARD WEST CENTRAL REGION AHMEDABAD

REPORT ON AQUIFER MAPS & MANAGEMENT PLANS MANGROL TALUKA, JUNAGADH DISTRICT, GUJARAT STATE

1. SALIENT FEATURES

1	Name of the	Mangrol - 5	37.60 Km ²						
1	TALUKA& Area,	21°02′29″ to 2							
	Location(Fig-1)		69°56′34″ to 70°18′58″ E						
2	No. of Town, villages	1,60							
3	District/State	Junagadh/Gu	iarat						
4	Population (2011		Male- 76589, Female- 72590, Total- 149,179						
	Census)	,		,		,			
5	Normal Rainfall (mm)	867.08 mm- N	Monsoon Rainf	fall (IN	1D) (i	n mm) (Long	g Term) 50		
		1094.20 mm ·	-Average Mons	soon R	ainfall	(in mm) (20	003-12)		
6	Agriculture (20015-16)	Khari	f Crops		Rabi	Crops			
		Crop	Area in Hact	Cr	ор	Area in Hact			
		Groundnut	26154	Whea	at	1900			
		Tal	125	Juvar		700			
		Castor	75	Casto	r	0			
				Gram		1100			
		Bajri	Bajri0BajriTuver0TuverMug1202Mug		600				
		Tuver			5				
		Mug			1600				
		Udad	Udad 758 Mustered		0				
		Cotton	200	Isabg	Isabgol 0				
		Sugarcane	0	Sugar	cane	0			
		Vegetables	773	Vege	tables	450			
		Fodder	3583	Fodd	er	950			
		Gam Guvar	0	Jira		5			
		Soyabin	0	Onior	า	5			
				Coria	nder	4000			
				Garlio	2	0			
				Meth	i	0			
		Total	32870	Total		11315]		
7	Existing and future	Sector		·	Exist	ing (MCM)	Future		
	water demands (MCM)						(MCM) (Year 2025)		
		Domestic and	I Industrial		5.72		7.67		
		Irrigation			34.60		18.59		
8	Water level behaviour (2015)(Fig-2 & 3)	07.34-45.85 r	n (Pre-monsoo	on)					

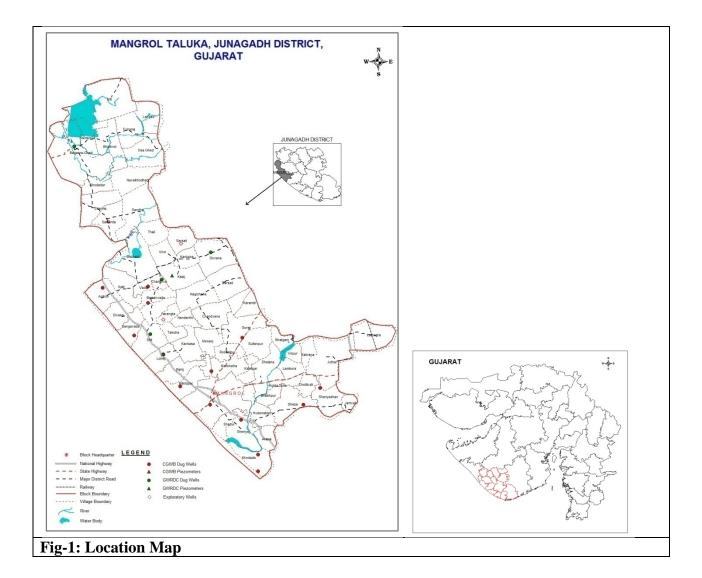

1. Hydrogeology:


Mainly three formations form aquifers in the area (Fig.2) namely Basalt, Limestone and Alluvium. The limestone constitute both Miliolitic limestone and Gaj limestone, however the quality of water is saline in Gaj limestone at depths. Alluvium is surficial features and does not forms good aquifer though the quality of ground water is also saline at depth. Miliolite limestone occupies major parts of the taluka. It also occurs as small outliers in Gaj and Trap country. The limestone is karstified at places. It is made of remains of foraminifers Miliolite around which calcite grain have formed (Krishnan, 1968). In upstream area the basaltic aquifer is only aquifer where the ground water exists upto the depth of weathering and in the fracture zones wherever encountered in the depth. Two hydrogeological Cross sections are given in Fig. 3.


Subsurface Hydrogeology

As inferred from borehole data of the Mongrol Taluka, Miliolitic limestone and weathered and fractured Basalt forms the principal aquifer in the Taluka. Top portion of Gaj formation is ocherous limestone with pockets of yellow clay and is easily distinguishable from the overlying Miliolite limestone. It is horizontally bedded and dip at small angle towards the sea. The lower part of Gaj formation is of marine origin whereas part is estuarine (Krishnan, 1968). Groundwater in aquifers occurs under unconfined conditions and in the fractures encountered in the massive basaltic formation in the depth. The movement of groundwater is controlled by the extent of weathering, fracture and joints in the trap formation. Groundwater exploration has been done down to a max. depth of 100 mbgl and the average discharge ranges from 2 to 5 lps by compressor during drilling. The quality of water has Salinity problem particularly area close to vicinity of sea, Ghed area.

2. AQUIFER DISPOSITION

Name of aquifer	Aquifer material	Nature of aquifer	Aquifer depth and zone encounter ed (m)	Nature of porosity	Comp resso r disch arge	Qualit y
Miliolitic Limestone	Limestone	Unconfined	0 to 30	Primary and secondary (Poreses, fractures and solution cavities)	-	-
Gaj limestone	Limestone	Unconfined & confined	17 to 83	Primary and Secondary (Pores, Fractures and solution cavities)	Avera ge yield 201m ³ /day	Good to bad
Deccan Trap	Basalt	Unconfined (Weathered and fractured)	0 to 90 max. Thickness 8m	Secondary (weathered & fracture)	1 to 2 lps	Fresh
		Deep Fracture (Massive & amygdolidal)	Explore up to the depth of 100 m	Secondary (fractures, joints, shears and flow contacts)	Comp ressor discha rge 2 to 5 lps	Fresh

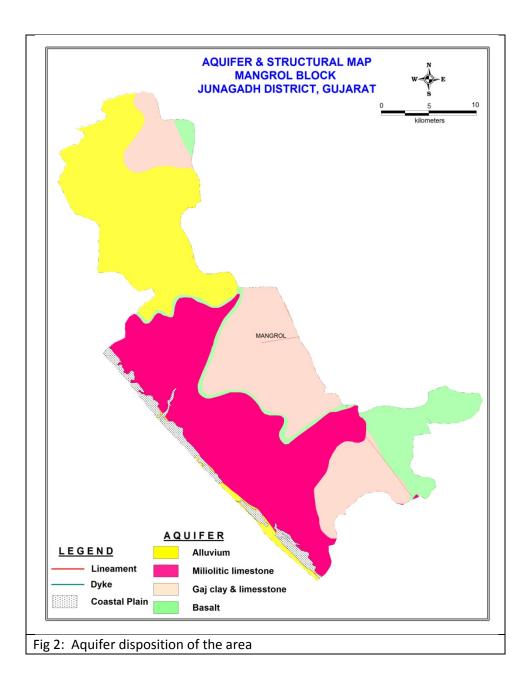

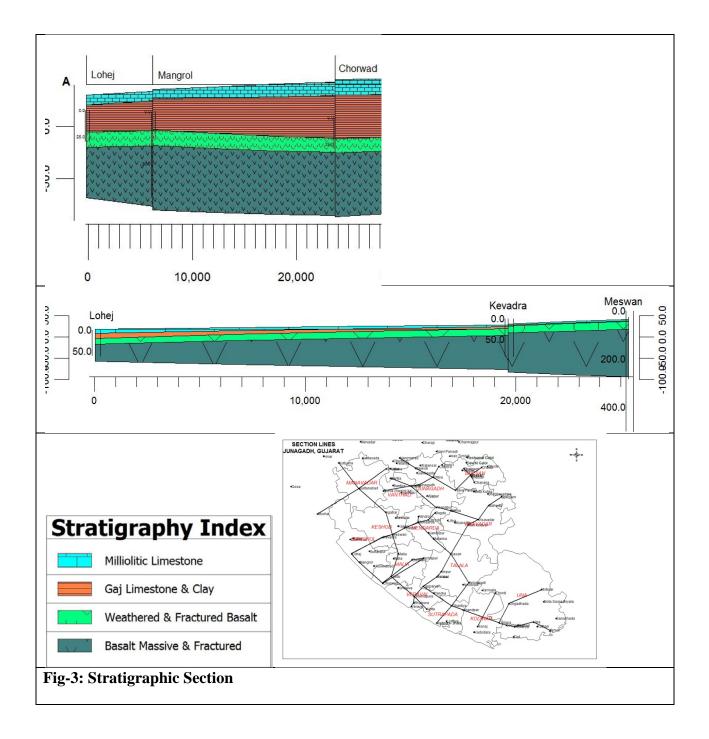



Depth to water level:

Depth to water level in the coastal area is ranges 2 to 10 m bgl whereas on land side away from the coast it is ranges 10 to 40 m bgl. (Fig. 4). Decadal average water level mostly between the period of May 2006 and 2015 ranges from 3.86 to 32.90 m bgl. The decadal average depth to water levels also depict almost similar picture (Fig.5).


Long term groundwater fluctuation of water level for pre-monsoon and post- monsoon period are depicted in Fig. 6 & 7 for the period of 1987 to 2015. Ranges of the long-term fluctuation is given in Table below.

	Pre-monsoon(1987-2015)				Post-monsoon(1987-2015)								
	Ri	se			Fa	all		Rise				Fall	
Min		Max		Min		Max		Min		Max		Min	Max
	0.15		4.18		0.32		15.20		0.23		9.31	Negligible	

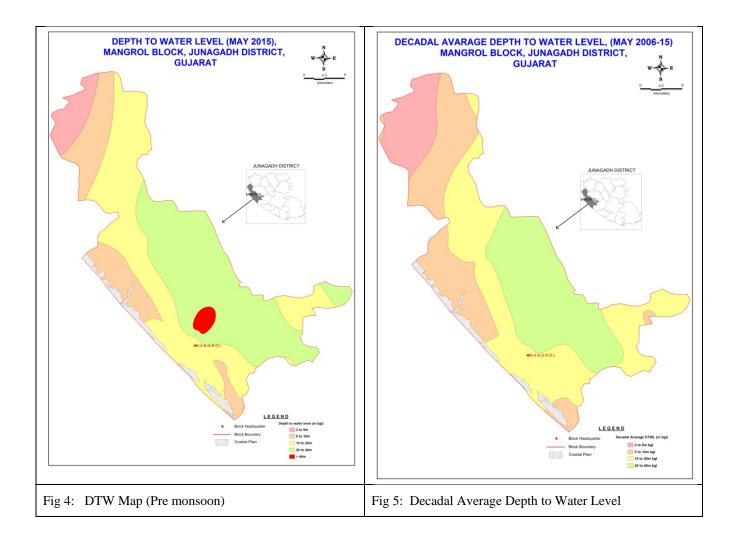

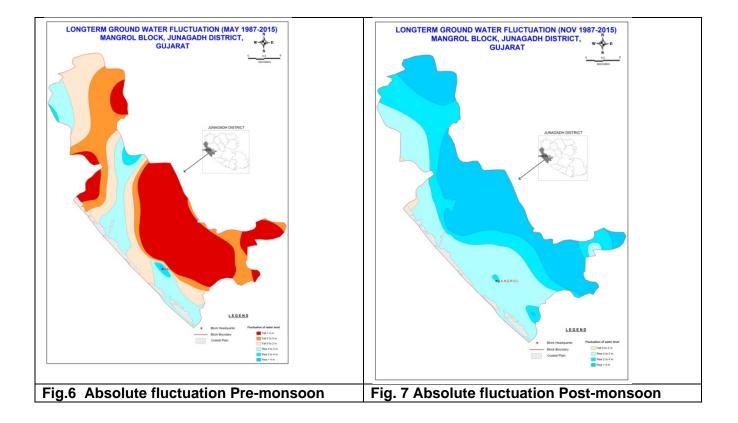

Water Table map (Fig 8) shows water table are ranges 23.23 m below msl to 46.76 m above msl. In general ground water flow directions are converging in the central part of the taluka and forming groundwater troughs.

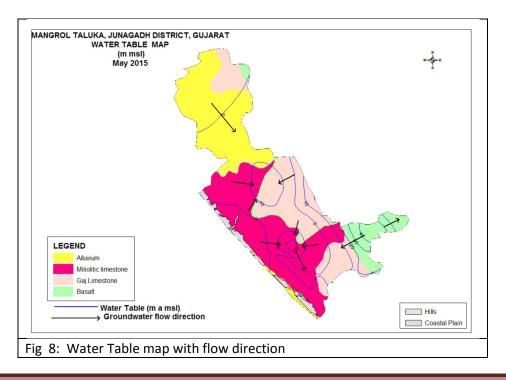

3. Groundwater resource extraction, contamination.

Dynamic GW Resources in MCM

Total groundwater availability of the area is estimated in year 2013 in fresh area is 60.86 MCM and total groundwater withdrawal for all purposes is 40.32 MCM. The stage of groundwater development is 66.25% and the taluka is categorized "Safe" (Table 2).

S No.	Item	Fresh	Saline
1	Area	409.91	162.59
2	Total GW Recharge (MCM)	64.06	36.77
3	Net GW Availability (MCM)	60.86	34.93
4	Gross Draft (MCM)	40.32	21.28
5	Net Availability for Future Irrigation (MCM)	18.59	13.65
6	Stage of GW Development %	66.25 (safe)	60.92 (safe)


Table: 2 Groundwater resources 2013

In Storage GW Resources

Typr of Rock Formation	Total Unit Area (sq km)	Fresh Area(sq km)	Saline/Brackish Area (sq km)	Depth of Bedrock(Soft Rock Areas/Depth upto which the aquifer is commonly Developed (HR Areas) (m)	Average Pre monsoon Water Level in (m)	Total saturated Thickness m	Thickness of the Granular Zone-Fracture zone/Productive Zone below Premonsoon WL(M)	Average Specific Yield (Sy) Fraction	FRESH In storage GW Resources (MCM)	BRACKISH/SALINE In storage GW Resources (MCM)
Alluvium	163.41	108.95	53.89	9.85	9.83	0.02		0.1	0.22	0.11
Basalt Weathered	59.13	50.18	8.96	18.43	13.59	4.84		0.02	4.86	0.87
Basalt-Massive-										
Fractured zone		50.18	8.96				11.49	0.01	5.77	1.03
Gaj Shale &										
Limestone	152.64	112.23	40.41	50.58	13.51	37.07		0.04	166.41	59.92
Milliolitic										
Limestone	198.78	36.27	162.44	21.79	14.96	6.83		0.1	24.77	110.95
	573.96	307.62	265.7						202.03	172.87

Chemical quality of groundwater

Groundwater quality in general is good. Salinity is expressed in terms of total dissolved solids (TDS). Quality of groundwater in the coastal part is saline and TDS ranges 3000 to more than 5000 mg/l whereas the NE part is observed TDS under 2000 mg/l (Fig. 9). Min. &Max. ranges of some of the constituents is given in the following Table.

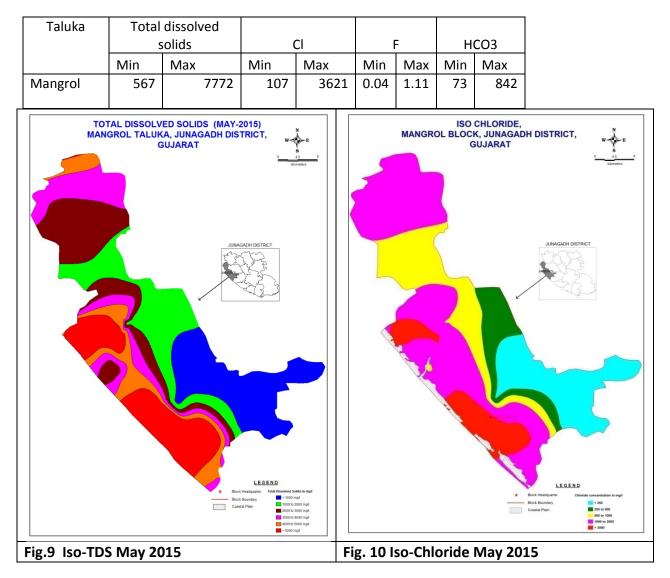

Ground Water Issues

- Salinity Ingress
- Inherent Salinity of Gaj Formation
- Sustainability of hard rock Aquifers
- Non Availability of sufficient Surface Water for Irrigation.
- Lack of awareness and involvement of stake holders in decision making.

4. Groundwater resource enhancement.

Table-3 Computation of volume (MCM) of water required for recharge

Aquifer	Volume of unsaturated zone avilable for artificial recharge	Specific yield factor	Volume of water required for recharge MCM	Volume of rain water planned for Artificial recharge (MCM)
Alluvium	30.71	0.1	3.07	0.00
Basalt	169.43	0.02	3.39	0.26
Gaj Shale & Limestone	254.25	0.05	12.71	0.00
Milliolitic Limestone	517.47	0.1	51.75	0.23
Total	971.87		70.92	0.49

Table: 4 Computation of Recharge structures.

Aquifer	Area feasible	Volume	Volume of	Volume	No of	No of
	for artificial	of rain	water	of water	Farm	Check
	recharge Sq.	water	planned for	planned	Pond	Dam
	Km	planned	conservation	for	(Unit	(Unit
		for	through	recharge	storage	0.05
		Artificial	Farm Pond	through	0.05MCM)	MCM)
		recharge		Check		
		(MCM)		Dam		
Alluvium	5.12	0.15	0.15	0.00	3	0
Basalt	35.52	1.05	0.79	0.26	15	5
Gaj Shale &	44.41	1.31	1.31	0.00	26	0
Limestone						
Milliolitic Limestone	96.40	2.85	2.62	0.23	52	4
Total	181.45	5.36	4.87	0.49	96	9

Financial Outlay of the Plan

The total estimated cost of the Plan is 1089.27 lakh, which includes Rs 72 lakh for ground water recharge activities, Rs 960 lakh (Farm ponds), 5.4 lakh for ground water monitoring (Piezometer construction) and Rs 51.87 lakh towards operation and maintenance charges. The tentative cost estimates of the various activities of the Plan are shown in Table 5.

Feasible Artificial Recharge & Water Conservation structures/ activities	Tentative Design	Quantity (in nos. or area in sq. m)	Rainwater harvested (mcm)	Tentative unit cost (in Rs lakh)	Total tentative cost (in Rs lakh)	Expected Annual GW recharge/ conservation (mcm)		
		Recharge	Structures/ A	Activities				
Check Dam		9	0.45	8	72	0.41		
		Sub total			72	0.41		
		Water (Conservation	Activities				
Farm Pond (3 fillings)	(30 m x 30m x 1.5 m) 900 sq.m or 0.1 ha	96	4.8	10	960	3.36		
		Impact as	ssessment & I	Monitoring				
Piezometer	Up to 80 m bgl	9		0.6	5.4			
Impact assessm	Impact assessment will be carried out by implemneting agency							
O & M - 5% of total cost of the scheme 51.87								
TOTAL					1089.27			


 Table: 5 Cost estimates of Recharge structures and monitoring well (Piezometers):

Note: Type, number and cost of structure may vary according to site after ground verification

The tentative location of villages for construction of Check Dams and their cost estimates are shown in Fig. 11 and Table 6.

Table-6 : TENTATIVE LIST OF VILLAGES WHERE ARTIFICIAL RECHARGE STRUCTREUS CAN BE TAKEN UP

	Village		
Sr. No.	Name	Sr. No.	Village Name
1	Dhelana	5	Juthal
2	Dhelana	6	Mangrol (M)
3	Jamvali	7	Rahij
4	Juthal	8	Sakrana
		9	Virpur

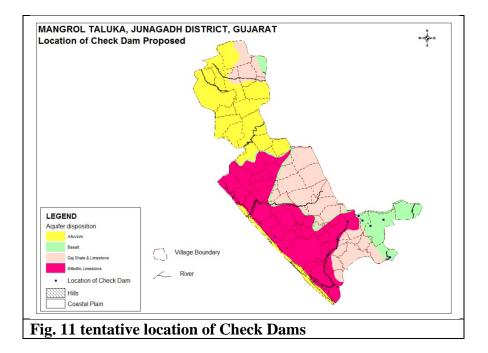

1. Demand Side Management:

As the surface water is not available to improve the supply of water, demand side management is essential.

Table: 7 Crop wise area in Hectares covered under micro irrigation methods (source)
Gujarat Green Revolution Company, Vadodara, Gujarat).

CROP	Area in Ha.	CROP	Area in Ha.
Banana	13.97	GROUNDNUT	13534.92
BOTTLE			
GUARD	4.13	GUVAR	2.2
CASTOR	6.7	JAMUN	1
CHILLI	7	Mango	2.22
COCONUT	86.46	ONION	1.51
COTTON	270.82	ΡΑΡΑΥΑ	0.48
GARLIC	1	Pomogranate	2.16
GOURDS	2.2	PULSES	2
GRAM	77.25	Sapota	2.73
GRASS	1.38	SESAMUM	1
GREEN			
GRAM	17.22	WHEAT	503.4
		Grand Total	14541.75

Water use efficiency by Drip Irrigation in Rabi crop season:

An area of 14542 hectare is covered by micro-irrigation scheme (MIS) under different crops grown in the district (Table 7). It is estimated the groundwater saving in the district by adopting the drip irrigation method to the main crop in Rabi season is about 1.36 MCM. It is estimated saving of groundwater through Drip irrigation to Groundnut is 4.64 MCM and cotton is not gown in the taluka (Table 8).

Table :8 Groundwater saving by Drip irrigation in MCM

Taluka	Rabi_Crops	Cotton crop		Grounnu	Total	
		Summer Kharif		Summer Kharif		
Mangarol	1.36	0.00	0.00	1.64	3.00	6.00

Expected Benefits or outcome of the Plan

Ground water recharge and water conservation Plan of Mongrol Taluka, Junagadh district envisages gainful utilization of 0.49 MCM of volume of rain water planned for recharging of depleted aquifer system. Besides this, the proposed intervention would also lead to reduction of pre-existing ground water draft by 4.87 MCM annually through construction of farm ponds. By adopting the micro-irrigation area in the remaining area conserve the 6.0 MCM of groundwater draft in the district.

With the additional recharge and water conservation interventions as proposed in the Plan, it is anticipated that with enhanced recharge and reduction in ground water draft, the stage of ground water development will reduce to 48% from the existing 66%. The projected status of ground water resources and utilization scenario is presented in table 9.

Table :9 Projected Status of Groundwater Resource & Utilization on Recharge and Micro-Irrigation
Interventions

Taluka	Net G.W. Availabil ity (MCM)	Additio nal Rechar ge from RWH (mcm)	Total Net G.W. Availabilit y after interventi on (mcm)	Existing G.W Draft for all purpose (mcm)	Saving of Ground water through conserv ation (mcm)	Saving of Groun d water throug h MIS (mcm)	Net GW draft after interventi ons (mcm)	Present stage of G.W. developmen t (%)	Project ed stage of G.W. Develo pemen t (in %)
Mangrol	60.86	0.49	61.35	40.321	4.87	6.00	29.45	66	48

Projected irrigation potential:

It is estimated 2498 Ha additional irrigation potential may be created in the taluka on 70% of groundwater development Table 10.

District	Development %	Net G.W. Availability (MCM)	Additional Recharge from RWH (mcm)	Total Net G.W. Availability after intervention (mcm)	Max GW avilable on 70% development MCM	Existing G.W Draft for all purpose (mcm)	Balanced GW avilable on 70% development and Existing Draft	Saving of Ground water through conservation (mcm)	Net GW avilable for withdrawl after interventions (mcm)	Average crop water requirement by Drip Irrigationm	Additional area to be Irrigate in sq. km	Area can be Irrigate in Ha
Mangrol	70	60.86	0.49	61.35	42.95	40.32	2.62	4.87	7.49	0.30	24.98	2498.29

Table: 10 Irrigation command area on 70% of development of groundwater

CONCLUSION AND RECOMMENDATION:

- 1. It is recommended to increase the recharge of groundwater from external surface water sources. It is also important to properly maintain and timely operate the existing recharge and salinity control structures.
- 2. Recommended to construct the 9 check dam and 96 Farm ponds in the Taluka to recharge 0.49 MCM and conserve 4.87 MCM of rainfall runoff.
- 3. During the electrification of well/ bore wells, the micro-irrigation through drip/sprinkler irrigation should be made mendatory, so as to minimize use of groundwater.
- 4. 5 Hectares area may brought under micro-irrigation to adopt Drip method to save about 1.36 MCM of water during the Rabi crop season.
- 5. 7571 Hectare Groundnut crop area during pre-Kharif season and last phase of Kharif season may brought under Drip irrigation to save 4.64 MCM of water.
- 6. 2498 Hectare land may additionally irrigated on 70% of groundwater development and observing all intervention proposed.

- The implementation of the project would result in additional recharge. The other tangible/ non-tangible benefits of the project are:
- □ Recharging the ground water will help in arresting the rapid decline in ground water resources and will also ensure improvement in quality of ground water by way of dilution.
- Proposed structures and measures will also enhance the ground water potential and would ensure sustainability of ground water resources.
- □ Surface runoff water stored or harnessed can be used as supplemental irrigational resources and will reduce the stress on the ground water.
- □ Besides, it will also help in reducing the amount and spate of storm water being drained by river and controlling soil erosion.