



## **केंद्रीय भूमि जल बोर्ड**

जल संसाधन, नदी विकास और गंगा संरक्षण मंत्रालय

भारत सरकार

Central Ground Water Board

Ministry of Water Resources, River Development and Ganga

Rejuvenation

Government of India

Report on

## **AQUIFER MAPPING AND MANAGEMENT PLAN**

**Velpur Mandal, Nizamabad District, Telangana**

दक्षिणी क्षेत्र, हैदराबाद


Southern Region, Hyderabad



भारत सरकार  
जल संसाधन नदी विकास एवम् गंगा संरक्षण मंत्रालय  
केंद्रीय भूमिजल बोर्ड

GOVERNMENT OF INDIA  
MINISTRY OF WATER RESOURCES, RIVER DEVELOPMENT AND  
GANGA REJUVENATION

**REPORT ON**  
**AQUIFER MAPS & MANAGEMENT PLANS**  
**VELPUR MANDAL, NIZAMABAD DISTRICT, TELANGANA STATE**

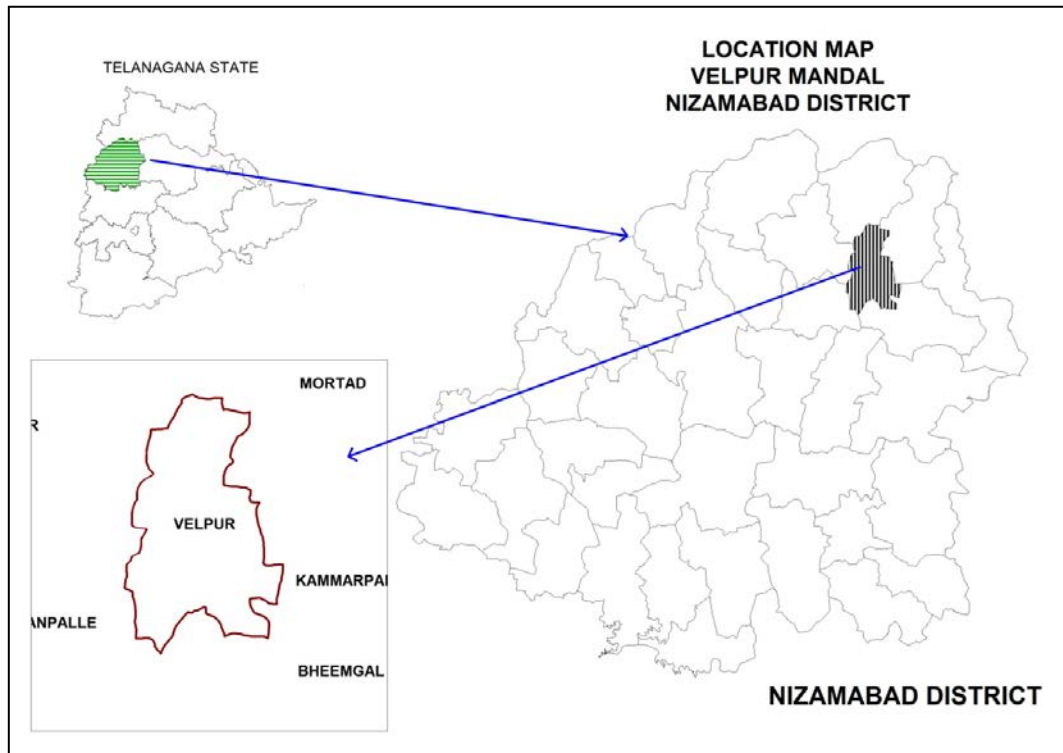


**CENTRAL GROUND WATER BOARD**  
**SOUTHERN REGION**  
**HYDERABAD**

**AUGUST-2016**


**REPORT ON  
AQUIFER MAPS & MANAGEMENT PLANS  
VELPUR MANDAL, NIZAMABAD DISTRICT, TELANGANA STATE**

<b>SALIENT FEATURES</b>			
1	Name of the Mandal/Area Revenue Division Location <b>(Fig-1)</b>	:	<b>VELPUR/134 Km<sup>2</sup></b> <b>NIZAMABAD</b> EL78 <sup>0</sup> 20'8.57"- 78 <sup>0</sup> 26'6.65" NL18 <sup>0</sup> 41'41.9"-18 <sup>0</sup> 51'18.52"
2	No. of Revenue villages	:	<b>16</b>
3	District/State	:	<b>Nizamabad/Telangana</b>
4	Population /Density (2011 Census)	:	42486/317 per Km <sup>2</sup>
5	Normal Rainfall (mm)  Actual Rainfall(2014-2015)(mm)	:	973.9 -Monsoon: 795.5 mm (82%) -Non-Monsoon:178.40 mm (18%) 719.2
6	Agriculture (Ha) (2014-15):	:	Kharif season : 1. Net area sown: 8958 2. Total oil seeds: 3490(39%) 3. Paddy: 2028 (23%) 4. Maize: 1975(22%) 5. Total spices: 1243(14%) 6. Total pulses: 112(1%) 7. Other crops: 110(1%) Rabi season : 1. Net area sown: 4797 2. Paddy: 1019 (21%) 3. Total oil seeds: 826(17%) 4. Bajra: 237 (5%) 5. Total pulses: 90 (2%) 6. Total spices: 62(1%) 7. Maize: 51(1%) 8. Other crops: 2749 (57%)
7	Irrigation (2014-15) (Ha)	:	1. Gross irrigated area: 12542 2. Net irrigated area: 7833 3. Area irrigated more than once: 4709 • Ground water: 12490 • Surface water (Tanks):52
8	Existing and future water demands (MCM)		Domestic & Industrial • Existing:0.33 • Future (year 2025): 1.18 Irrigation (Existing): 23.60
9	Depth to water level (m bgl)	:	6-28 m (Pre-monsoon) 13-35 m (Post-monsoon)
	<b>AQUIFER DISPOSITION</b>	:	
10	No of Aquifers	:	2
11	3-D aquifer disposition and basic characteristics of each aquifer <b>(3D: Fig-2a</b> <b>Section Layout:2b</b>	:	<b>Geology-Granites</b> <b>Aquifer-1 (Weathered Zone):</b> Weathering varies from 11-23 m Transmissivity(T): 6-181 m <sup>2</sup> /day

	<b>Sections: 2c &amp; 2d)</b>		Specific Yield (Sy):0.2 to 2 % <b>Aquifer-2 (Fractured Zone):</b> Depth of fracturing varies from 15-35 m. Transmissivity (T): 10-117 m <sup>2</sup> /day Specific storage (S):0.00001-0.02 Cumulative yield (Aq1 and Aq 2) (lps): 0.5 to 1.5
12	Ground water Issues	:	<ul style="list-style-type: none"> <li>• Geogenic contamination by fluoride.</li> <li>• Anthropogenic contamination by nitrate.</li> <li>• Sustainability of wells (3-4 hrs).</li> </ul>
13	Ground water resource availability and extraction (MCM)	:	<ul style="list-style-type: none"> <li>• Net GW availability :21.02</li> <li>• Gross Ground Water draft for Irrigation: 20.40</li> <li>• Gross Ground water draft for domestic and industrial supply:0.33</li> <li>• Gross GW draft:20.73</li> <li>• Stage of ground water development: 99%</li> <li>• Category: Over-exploited.</li> </ul>
14	Ground water extraction	:	No of ground water extraction structures:5664 No. of Dug wells :229 No. of Bore wells :5435
15	Chemical quality of ground water and contamination	:	<b>Pre-monsoon</b> EC (µS/cm) min: 650 max:1500 NO <sub>3</sub> (mg/L): Min :10 and max: 240 F (mg/L): Min 0.75 and Max:1 <b>Post-monsoon</b> EC (µS/cm) min: 500 max:1350 NO <sub>3</sub> (mg/L): Min :5 and max :100 F (mg/L): Min 0.5 and Max 1.25
16	<b>Ground Water Recharge Scenario</b>	:	<b>MCM</b>
16.1	Recharge from Rainfall (Monsoon)	:	13.50
16.2	Recharge from Other sources (Tanks and applied irrigation) (Monsoon)	:	3.52
16.3	Recharge from rainfall (Non-Monsoon)	:	0.89
16.4	Recharge from Other sources (Tanks and applied irrigation) (Non-Monsoon)	:	5.45
16.5	Total annual GW Recharge	:	23.36
16.6	Natural Discharge	:	2.34
16.7	Existing Minor Irrigation Tanks	:	23
16.8	Storage from existing tanks	:	1.37
16.9	Existing Artificial Recharge Structures (PT, CD and Farm ponds)	:	21/25/180
17	Storage from existing AR Structures	:	0.33

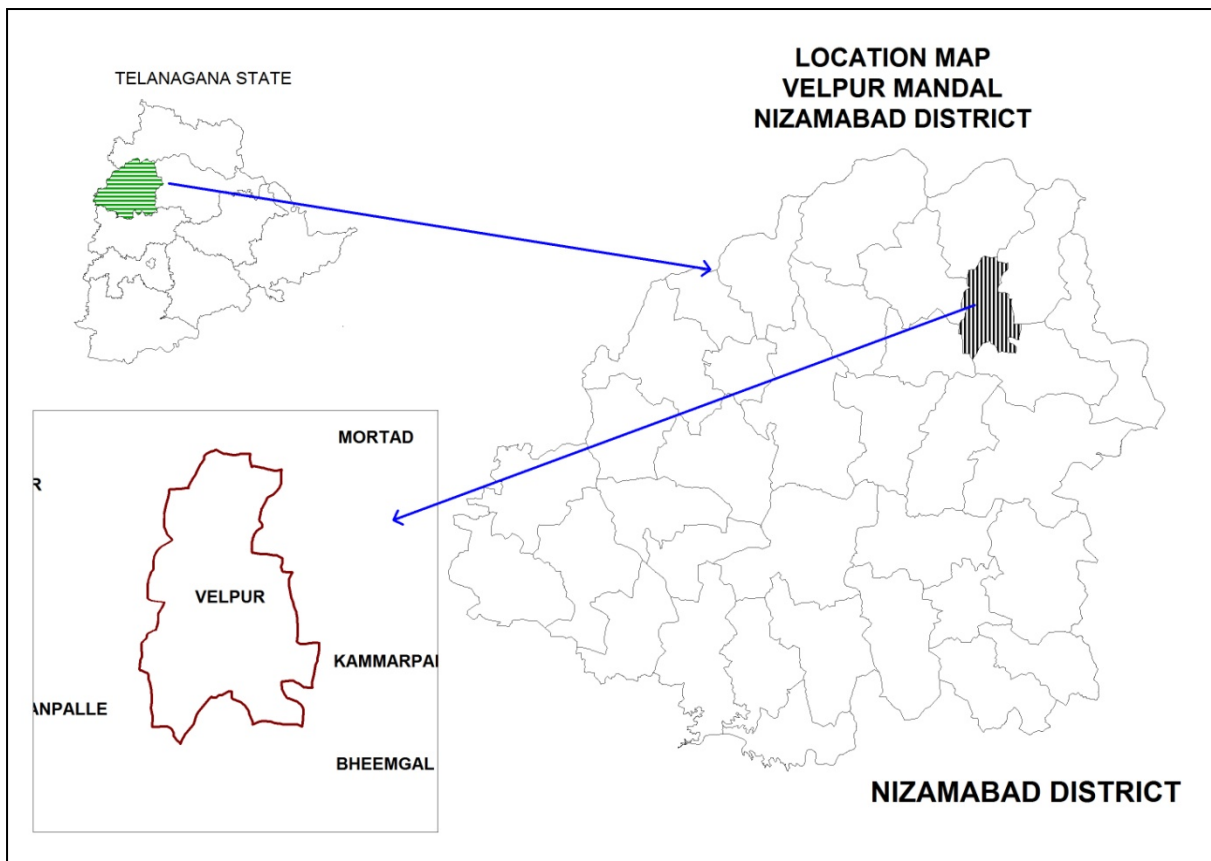

**Fig-1: Location Map of Velpur Mandal.**

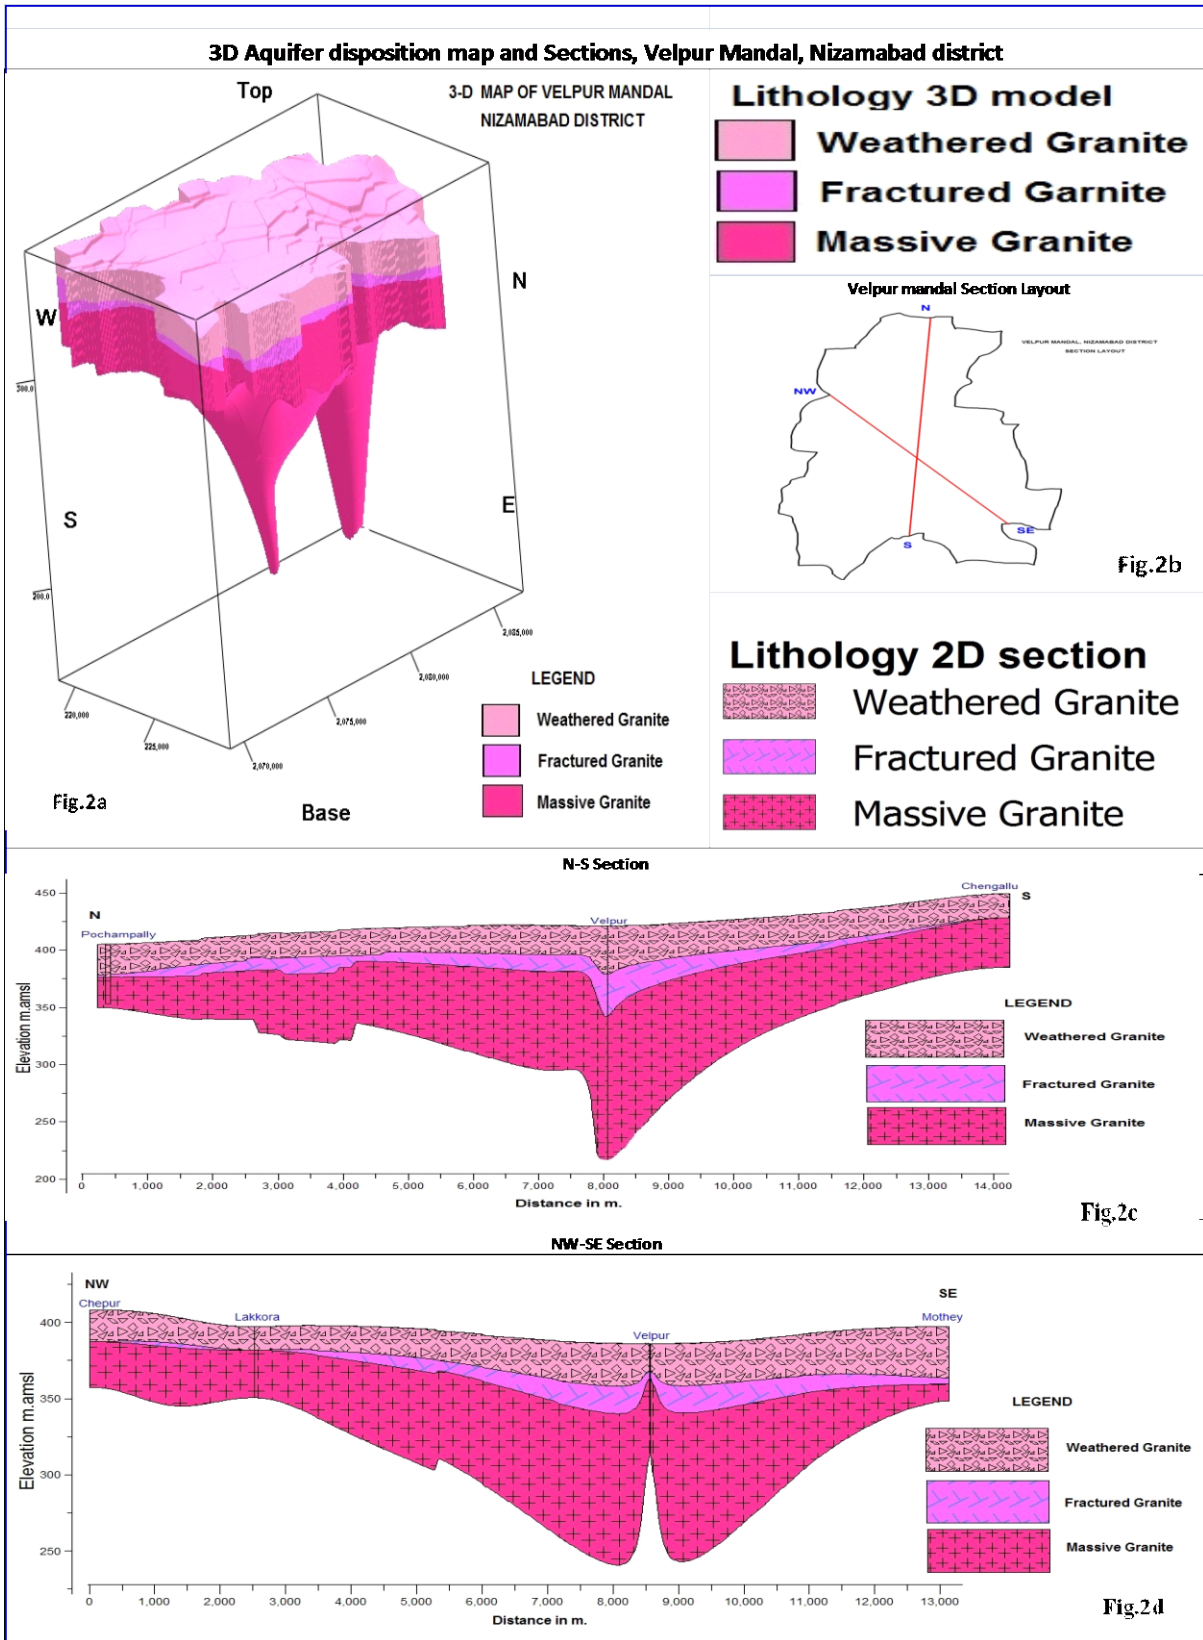

**Fig-2(a-d): 3 D map and Sections.**

**GW MANAGEMENT STRATEGIES, VELPUR MANDAL, NIZAMABAD DISTRICT**

<b>A</b>	<b>WATER RESOURCE AVAILABILITY</b>		
	• Ground water	:	21.02 MCM
	• Surface Water (as per 2014-15 irrigation data)	:	0.42 MCM
	• Total water availability	:	21.44 MCM
<b>(a)</b>	<b>Ground Water Resource Enhancement (Table-1)</b>		
	<b>Supply side Interventions</b>		
1	Aquifer wise space available for recharge and proposed interventions	:	10-32 m
2	Volume of Un-saturated zone (upto 3mbgl)	:	2500 MCM
3	Recharge Potential (Sy 2%)		50 MCM
4	Utilizable Yield available for ARS	:	3.74 MCM
5	No. of Check dams (CD's) / Mini percolation tanks (MPT's) recommended	:	103 (CDs:44+PTs59)
6	Total Cost of ARS	:	8.1 Cr
7	Expected Ground Water Recharge through ARS	:	1.9 MCM
8	Water Conservation Measures (WCM) (Farm Ponds)	:	140
9	Total Cost of WCM	:	0.35 Cr
10	<b>Mission Kakatiya-</b> Repair & Renovation of existing Tanks	:	0.59 MCM (23 tanks)
11	Proposed tanks to be taken up in phased manner		-
12	Expected GW Recharge under <b>Mission Kakatiya</b>	:	0.18MCM(30 % of capacity)
13	<b>Mission Bhagiratha</b> (Providing drinking water needs to the entire population) @ 100 lpcd/person (rural) and 135 (urban) from surface water source from outside the mandal area ( <b>From River Krishna</b> )	:	1.55 MCM/year
14	Net Saving of Ground water from <b>Mission Bhagiratha</b>	:	0.93 MCM/year
<b>(b)</b>	<b>DEMAND SIDE INTERVENTION</b>		
15	Existing Micro Irrigation Intervention & Gross area irrigated	:	150 Micro irrigation units/165.86ha
16	Proposed Micro Irrigation	:	700 ha in 7 Villages @ 100 ha in each non command village.
17	Cost for micro-irrigation	:	4.2 Cr@ 0.60 lakhs per ha.
18	Expected ground water saving from micro-irrigation	:	1.4 MCM of water is expected to be conserved.
<b>(c)</b>	<b>REGULATION &amp; COMMUNITY INTERVENTIONS</b>		
19	Regulation and control	:	<ul style="list-style-type: none"> <li>• WALTA-Act to be implemented in true spirit.</li> <li>• Regulation of power supply in 2</li> </ul>



			<p>spells @ 4 hours/spell to increase bore well/GW sustainability.</p> <ul style="list-style-type: none"> <li>As mandatory measures power connection may be given to only those farmers who are adopting micro irrigation for all new bore well to be constructed.</li> </ul>
(d)	<b>OTHER INTERVENTIONS SUGGESTED</b>	:	<ul style="list-style-type: none"> <li>Participatory Ground Water Management with community and women participation.</li> <li>Paddy cultivation during rabi season should be reduced and to be shifted to ID Crops and drought resistant crops. If necessary some regulatory rules may be framed and implemented.</li> <li>In the existing ground water areas sharing of ground water amongst the users to be encouraged to increase the sustainability of wells by reducing well interference.</li> <li>The bore well owner should be suitably compensated for the cost of well by funding to farmers for adopting micro irrigation practices by the Govt.</li> </ul>
(e)	<b>EXPECTED RESULTS AND OUTCOME</b>		
20	Total Cost of Interventions (Excluding Mission Kakatiya and Bhagiratha)	:	12.65 Cr
21	Likely benefit of Interventions	:	~4.41 MCM ground water can be saved from the above interventions. The stage of Ground water development may likely to be come down by 18 % (from 99% to 81%).

**Table-1: Village wise list of Artificial Recharge Structures Recommended.**

S.No	Village	Unsaturated thickness upto 3 m. bgl (m.)	Village Recharge potential MCM (upto 3 m.bgl)	20% of Runoff for AR MCM	Proposed CD's	Proposed PT's	Total cost	Expected GW Recharge in MCM
	Priority-1	m	MCM	MCM	NO.	NO.	Lakhs	MCM
1	ANKSAPUR	12	1.94	0.27	4	2	40	0.13
2	KUKNOOR	22	2.68	0.20	2	4	50	0.10
3	VELPUR	30	11.32	0.61	11	11	165	0.31
4	VENKATAPUR	28	1.28	0.08	1	1	15	0.04
5	AMEENAPUR	17	0.59	0.06	1	1	15	0.03
6	JANAKAMPET	19	1.42	0.12	0	2	20	0.06
7	KOMANPALLE	25	1.62	0.11	2	2	30	0.05
8	KOTHAPALLE	18	0.55	0.05	0	0	0	0.03
9	MOTHE	32	9.25	0.47	3	8	95	0.24
10	P NARKHODA	21	5.01	0.39	5	7	95	0.19
11	SAHEBPET	20	1.54	0.13	1	1	15	0.06
12	WADI	18	0.99	0.09	0	0	0	0.04
	<b>Priority-1(Total)</b>				<b>30</b>	<b>39</b>	<b>540</b>	<b>1.29</b>
	<b>Priority-2</b>							
1	LAKHORA	10	1.08	0.18	3	3	45	0.09
2	PADGAL	15	4.74	0.52	7	10	135	0.26
3	POCHAMPALLE	16	1.68	0.17	2	2	30	0.09
4	AKLUR	24	4.31	0.29	2	5	60	0.15
	<b>Priority-2 (Total)</b>				<b>14</b>	<b>20</b>	<b>270</b>	<b>0.58</b>
	<b>Total (P-1&amp;P-2)</b>				<b>44</b>	<b>59</b>	<b>810</b>	<b>1.87</b>

