

For official use only
CGWB/SR/AR/2015-16/43



GOVERNMENT OF INDIA
MINISTRY OF WATER RESOURCES,
RIVER DEVELOPMENT & GANGA REJUVENATION
CENTRAL GROUND WATER BOARD

PLAN ON
ARTIFICIAL RECHARGE TO GROUNDWATER AND
WATER CONSERVATION IN
BHEEMADEVARPALLI MANDAL, KARIMNAGAR DISTRICT,
TELANGANA STATE

SOUTHERN REGION,
HYDERABAD
AUGUST-2016

PLAN ON
ARTIFICIAL RECHARGE TO GROUNDWATER AND
WATER CONSERVATION IN
BHEEMADEVARPALLI MANDAL, KARIMNAGAR DISTRICT,
TELANGANA STATE

CONTENTS

S.NO	TOPIC
1	INTRODUCTION
2	LOCATION
3	PHYSIOGRAPHY AND DRAINAGE
4	RAINFALL
5	LAND USE PATTERN
6	HYDROGEOLOGY
7	GROUND WATER LEVEL SCENARIO
8	DYNAMIC GROUND WATER RESOURCES
9	NEED FOR ARTIFICIAL RECHARGE AND CONSERVATION METHODS
10	JUSTIFICATION OF THE ARTIFICIAL RECHARGE PROJECT
11	AVAILABILITY OF SURPLUS, SURFACE WATER FOR ARTIFICIAL RECHARGE OR CONSERVATION
12	FEASIBLE ARTIFICIAL RECHARGE STRUCTURES
13	TENTATIVE COST ESTIMATES
14	TIME SCHEDULE

AT A GLANCE

Name of the Mandal	BHEEMADEVARPALLE
District	KARIMNAGAR
State	TELANGANA
Total Area(sq. km)	178
Area suitable for Artificial Recharge (Sq.kms)	152
Latitude and Longitude	17.985930 to 18.163720 and 79.230990 to 79.429960.
Average Annual Rainfall (mm)	832
Geology	BGC
Average Depth To Water Level (Decadal) (Pre Monsoon)	10.50
Average Depth To Water Level (Decadal) (Post Monsoon)	6.80
Ground Water Resources (2011)	
Annual Replenishable Ground Water Resources (MCM/yr)	26.08
Net Annual Ground Water Availability(MCM)/yr	23.47
Net Annual Ground Water Draft(MCM)/yr	27.24
Projected Demand for Domestic and Industrial Use(MCM)/yr	0.64
Stage of Ground Water Development (%)	116
Runoff Yield in MCM/yr.	26.8
Total Storage Created in the Mandal by Various Agencies (MCM)/yr	0
Artificial Recharge/Conservation Measures	
Recharge Structures Proposed (No.s)	Percolation Tanks-12 Check Dams-32 Farm Ponds – 400.
Improving Water use Efficiency	Micro Irrigation – 2000 ha
Tentative Total Cost in Lakhs (Rs.)	1734.6
Expected Recharge/Savings (MCM)/yr	7.62

1. INTRODUCTION

Bheemadevarpalle Mandal is one of the over-exploited Mandal in Karimnagar district, Telangana State, which is economically backward and chronically drought affected. The Mandal has 15 inhabited villages and with 20 gram Panchayats.

2. LOCATION

The Mandal lies between north latitudes 17.985930 to 18.163720 and between east longitudes 79.230990 to 79.429960. The Mandal occupies the southern part of the Karimnagar district and is bounded on the north by Saidapur mandal, on the east by Elkathurthi mandal, on the south by Warangal district and west by Husnabad Mandal. (Fig.1) The geographical area of the Mandal is 178 sq.km.

3. PHYSIOGRAPHY AND DRAINAGE:

The area is drained by streams, falling in Manneru sub-basin of Godavari basin. The streams are mostly ephemeral in nature. The drainage pattern is dendritic, rectangular to sub rectangular due to the influence of geological structures. (Fig.2)

4. RAINFALL

The average rainfall in the Mandal is 832 mm. The rainfall during the South-west monsoon season i.e., June-September accounts for about 85% of the total rainfall.

5. LAND USE PATTERN

Out of the total geographical area of 178 Sq.km, the area under forest is 5.76 Sq.km. and the net area sown is 56.03 Sq.km. Barren and uncultivable land is 24.62 Sq.km. The land for non agricultural use accounts for 17.63 sq.km.(Fig.3).

6. HYDROGEOLOGY

The area is underlain by granitic gneisses of Achaean age (Fig-4). Ground water occurs in weathered and fractured zones under water table and semi- confined conditions. The weathered zone thickness as per the GEC report is 25 m. The weathered zone has been extensively tapped by dug and dug cum bore wells up to 25 m depth, which are mostly dry now. Ground water occurs in the fractured granites down to a depth of 200 m bgl. However, the potential fractures are encountered between 50-100 m bgl. The cumulative yield varies from 2-5 lps.

7. GROUND WATER LEVEL SCENARIO

The depth to water level during pre and post-monsoon varies from 5 to 20 m bgl. The depth to water levels maps for pre and post monsoon period (2014) are shown in Fig. 5 & 6 respectively. The decadal mean water level trend during post monsoon is depicted in the Fig.7.

8. DYNAMIC GROUND WATER RESOURCES

The Ground water availability, Utilization and stage of Development in Bheemadavarpalle Mandal, Karimnagar District is given in the Table-1.

Table-1 Ground water resources of BheemadavarpalleMandal,Karimnagar District.

Annual Replenishable Ground water resources (MCM)	26.08
Net Annual Ground Water Availability(MCM)/yr	23.47
Net Annual Ground Water Draft(MCM)/yr	27.24
Projected Demand for Domestic and Industrial use up to 2025. (MCM)	0.64
Stage of Ground water development (%).	116
Whether notified or not with year of notification.	No

9. NEED FOR ARTIFICIAL RECHARGE AND CONSERVATION METHODS

The ground water withdrawal is more than the recharge with a stage of development above hundred percent. The long term water level trend mostly shows a declining trend and the water levels are very deep ranging upto 15 m. The sustainability of bore wells has become questionable as many bore wells are either drying up or have recorded reduced yields. There is no surface water irrigation facility in the area. All these factors indicate that there is an urgent need for artificial recharge and water conservation in the Mandal.

10. JUSTIFICATION OF THE ARTIFICIAL RECHARGE PROJECT

Bheemadavarpalle Mandal falls under high stage of ground water development i.e., 116 % and with sufficient amount of uncommitted surface runoff. The area is completely dependent on ground water for domestic, industrial and irrigation purposes. During the monsoons runoff quickly flows out of the area without natural recharge to ground water. It is necessary to apply artificial recharge techniques to allow more and more recharge through check dams, PTs, MPTs, farm ponds, recharge shafts to cope up with the withdrawal pattern and also to improve ground water situation through various interventions including on farm activities and micro irrigation systems (Sprinkler-Drip-HDPE).

11. AVAILABILITY OF SURPLUS, SURFACE WATER FOR ARTIFICIAL RECAHRGE OR CONSERVATION

The runoff was calculated by taking into account of normal rainfall of the mandal and corresponding runoff yield from Strangers table. The existing storage created by various artificial recharge structures constructed by the State Government, if any, was deducted for calculating the runoff yield to recommend new AR structures.

Total Geographical area (Sq.kms)	178
Hilly Area (Sq.kms)	26
Area suitable for Artificial Recharge (sq.km.)	152
Runoff Yield in MCM/yr	26.8
Existing No. of Check Dams	0
Storage created MCM/yr	0
Existing No. of Percolation Tanks	0
Storage created MCM/yr	0
Total Existing Storage Created	0

12. FEASIBLE ARTIFICIAL RECHARGE STRUCTURES

Since the mandal is categorized as over exploited, there is an immediate need for improving ground water scenario and to ensure sustainability of ground water sources. It is also suggested to create additional storage capacity of surface water bodies which would result in supplementing irrigation thereby reducing the ground water draft. The run off available for ground water recharge purpose within the mandal has been assessed as 26.8 MCM/yr, which could be considered for further planning of artificial recharge. However, the number of artificial recharge structures feasible has been recommended in areas, by considering the utilizable yield, number of existing structures, land use, drainage pattern and also where the post monsoon water levels (decadal mean) are more than 5 m bgl., and or decadal trends are either falling or showing insignificant raising trend.

A) Check dams and Percolation Tanks:

The area is covered by seasonal nalas – drains, which carry discharge during monsoon period debauched into the water bodies within a short duration. It is proposed to identify such nalas for construction of check dams/Percolation tank with recharge shafts, so as to harness ground water and to increase soil moisture content.

- The site selected for check dam/Percolation Tank should have sufficient thickness of permeable soils or weathered material to facilitate recharge of stored water within a short span of time. The water stored in these structures is mostly confined to the stream course and height is normally less than 2m.
- These are designed based on stream width and excess water is allowed to flow over the crest wall. In order to avoid scouring from excess runoff water cushions are provided on the downstream side. To harness maximum runoff in the stream, a series of such check dams can be constructed to have recharge on a regional scale.
- Considering the annual monsoon rainfall of 832 mm, sufficient rain water can be harnessed. This will improve ground water regime as well as delaying the instant flow into the main river.
- The flow in these seasonal rivers can be sustained up to about 2 to 3 months after monsoon.

- Recharge trenches can also be constructed along upstream side of the check dam/Percolation Tank in the impoundment area for enhancing the ground water recharge rate.

A total of 32 Check dams and 12 Percolation tanks are recommended.

B). Farm Ponds

A farm pond is a large dug out in the earth, usually square or rectangular in shape, which harvests rain water and stores it for future use. It has an inlet to regulate inflow and an outlet to discharge excess water. The pond is surrounded by a small bund, which prevents erosion on the banks of the pond. The size and depth depend on the amount of land available; the type of soil water from the farm pond is conveyed to the fields manually, by pumping, or by both methods.

Advantages of Farm Ponds

- They provide water to start growing crops, without waiting for rain to fall.
- They provide irrigation water during dry spells between rainfalls. This increases the yield, the number of crops in one year, and the diversity of crops that can be grown.
- Bunds can be used to raise vegetables and fruit trees, thus supplying the farm household with an additional source of income and of nutritious food.
- Farmers are able to apply adequate farm inputs and perform farming operations at the appropriate time, thus increasing their productivity and their confidence in farming.
- They check soil erosion and minimize siltation of waterways and reservoirs.
- They supplies water for domestic purposes and livestock.
- They promote fish rearing.
- They recharge the ground water.
- They improve drainage.
- The excavated earth has a very high value and can be used to enrich soil in the fields, levelling land, and constructing farm roads.

As per the Land use classification, majority of the area is covered by the agricultural field. Hence, it is proposed to construct 400 farm ponds in 20 villages of the Mandal @ 20 farm ponds in each village.

C). Micro Irrigation System (Sprinkler /drip/HDPE pipes)

Micro irrigation is defined as the frequent application of small quantities of water directly above and below the soil surface; usually as discrete drops, continuous drops or tiny streams through emitters placed along a water delivery line. In flood/furrow irrigation method more than 50% of applied water is wasted through seepage to deeper level, localized inundation causes loss through evaporation and it leaches out the nutrients from the plant. While through drip & sprinkler irrigation wastages of irrigational water could be minimized. The studies on different crops, has revealed that irrigation water is saved drastically. The conveyance losses (mainly seepage & evaporation) can be saved up to 25 to 40% through utilization of HDPE pipes. Initially the scheme is proposed to be implemented in worst affected areas showing deepest water levels and significant declining trends. It is proposed to take up micro irrigation system in 2000 ha @ 100 ha per village.

13. TENTATIVE COST ESTIMATES (BHEEMADEVARAPALLI MANDAL)

S.No.	Feasible Artificial Recharge & Water Conservation structures/	No. of Structures/ Quantity	Total Volume (MCM)	Tentative unit cost (in Rs lakh)	Total tentative cost (in Rs Lakh)	Expected Annual GW recharge/savings (MCM)
1	Proposed Masonry Check dams Crest Length -10-15 m, Height-1-2 m) (0.007 MCM*4 fillings)	32	0.896	5	160	0.672
2	Recharge shaft in Check dam (50% of the existing Check dams)	0	0	0.5	0	0
3	Proposed Percolation Tanks (100*100*2.5)* 4 fillings)	12	1.2	15	180	0.9
4	Renovation Desilting, Repairs and installation of Recharge Shafts in existing PTS (50% of the existing PTS)	0	0	1	0	0
5	Proposed Farm Pond (6 filling) 5*5*1.5 dimension @ 20 farm ponds per each village	400	0.0576	0.25	100	0.05184
6	Proposed Sprinkler/drip/HDPE pipes for 100 ha in each village	2000		0.6	1200	6
7	Proposed Piezometers up to 50 mbgl @ one PZ per Village	20	0	0.6	12	0
8 (i)	Total (No. of AR Structures)	464	2.15		452	1.624
8 (ii)	Total (ha)	2000			1200	6
	Total (8(i) + 8 (ii))				1652	7.624
9	Impact Assessment & O & M -5 % of Total cost of the Scheme				82.6	
	Grand Total				1734.6	

*(Expected annual GW Recharge/Savings MCM - CDS& PTS: 75%, Farm ponds - 90%, Sprinklers-50%, Recharge shafts in existing CDS and PTS-100%)

Note: The type, number and cost of structure may vary according to site, after the ground truth verification.

14. TIME SCHEDULE

Steps	Quarter							
	1 st	2 nd	3 rd	4 th	5 th	6 th	7 th	8 th
Identification of line department/implementing agency and preparation of DPR								
Approval of Scheme and releases of sanction of funds								
Implementation of ARS								

Phase = one quarter or 3 months or equivalent to financial quarter

A). Operation and Maintenance

In all projects impact assessment has to be carried out to ensure that project is economically viable, socially equitable and environmentally sustainable by inter-related socio-economic, cultural and human-health impacts, both beneficial and adverse. Accordingly it is proposed to have impact assessment as well as operation & Maintenance at the rate of 5% of the total cost of the project for 5 years from the completion of artificial recharge project.

B). Expected Benefits

The benefits of the project are:

1. The implementation of the project would result in additional recharge/Ground water savings to the tune of 7.624 MCM.
2. Ground water recharge will help in arresting the rapid decline in ground water resources and will also ensure improvement in quality of ground water by dilution.
3. Proposed structures and measures will also enhance the ground water potential and would ensure sustainability of ground water resources. It is estimated that the stage of ground water development may likely to be reduced from the present 116% to 87% (29%)
4. It will also help in controlling soil erosion.


Acknowledgements

The inputs with regard to the Utilizable Yield, existing and proposed Artificial Recharge Structures have been provided by the Director, State Ground Water Department, Government of Telangana. The same is duly acknowledged.


**PROPOSED ARTIFICIAL RECHARGE STRUCTURES IN
BHEEMADEVARPALLE MANDAL, KARIMNAGAR DISTRICT, TELANGANA.**

S.No.	Village	Latitude	Longitude	Type of Structure
1	BHEEMADEVARPALLE	18.0968	79.3511	CD
2	BHEEMADEVARPALLE	18.1109	79.3685	CD
3	ERRABALLE	18.0341	79.3640	CD
4	ERRABALLE	18.0235	79.3658	CD
5	GATLANARSINGAPUR	18.1094	79.2949	CD
6	GATLANARSINGAPUR	18.0791	79.3193	CD
7	GATLANARSINGAPUR	18.0709	79.3072	CD
8	GATLANARSINGAPUR	18.0768	79.2980	CD
9	KATKUR	18.0250	79.2312	CD
10	KATKUR	18.0239	79.2302	CD
11	KOPPUR	18.1055	79.3725	CD
12	KOPPUR	18.1109	79.3685	CD
13	KOPPUR	18.0968	79.3609	CD
14	KOTHAKONDA	18.0661	79.2788	CD
15	KOTHAKONDA	18.0463	79.2971	CD
16	KOTHAPALLE	18.0732	79.3804	CD
17	MALLARAM	18.0418	79.2820	CD
18	MALLARAM	18.0002	79.2839	CD
19	MALLARAM	18.0178	79.2644	CD
20	MALLARAM	18.0322	79.2520	CD
21	MALLARAM	18.0131	79.2568	CD
22	MALLARAM	18.0037	79.2540	CD
23	MALLARAM	18.0336	79.2849	CD
24	MANIKYAPUR	18.1396	79.3771	CD
25	MANIKYAPUR	18.1403	79.3823	CD
26	MANIKYAPUR	18.1327	79.3735	CD
27	MULKANOOR	18.0843	79.3721	CD
28	MUSTAFAPUR	18.0517	79.3162	CD
29	MUSTAFAPUR	18.0504	79.3363	CD
30	MUSTAFAPUR	18.0599	79.3122	CD
31	VANGARA	18.1083	79.3393	CD
32	VANGARA	18.1213	79.3469	CD
33	GATLANARSINGAPUR	18.1043	79.3081	PT
34	KANNARAM	18.0089	79.2615	PT
35	KATKUR	18.0234	79.2408	PT
36	MALLARAM	18.0081	79.2618	PT
37	MALLARAM	18.0151	79.2790	PT
38	MULKANOOR	18.0666	79.3752	PT
39	MUTHARAM (P.K)	18.0726	79.3311	PT
40	MUTHARAM (P.K)	18.0504	79.3609	PT
41	RATNAGIRI	18.1165	79.3526	PT
42	RATNAGIRI	18.1338	79.3645	PT
43	VANGARA	18.1182	79.3384	PT
44	VANGARA	18.1290	79.3279	PT

Fig.1

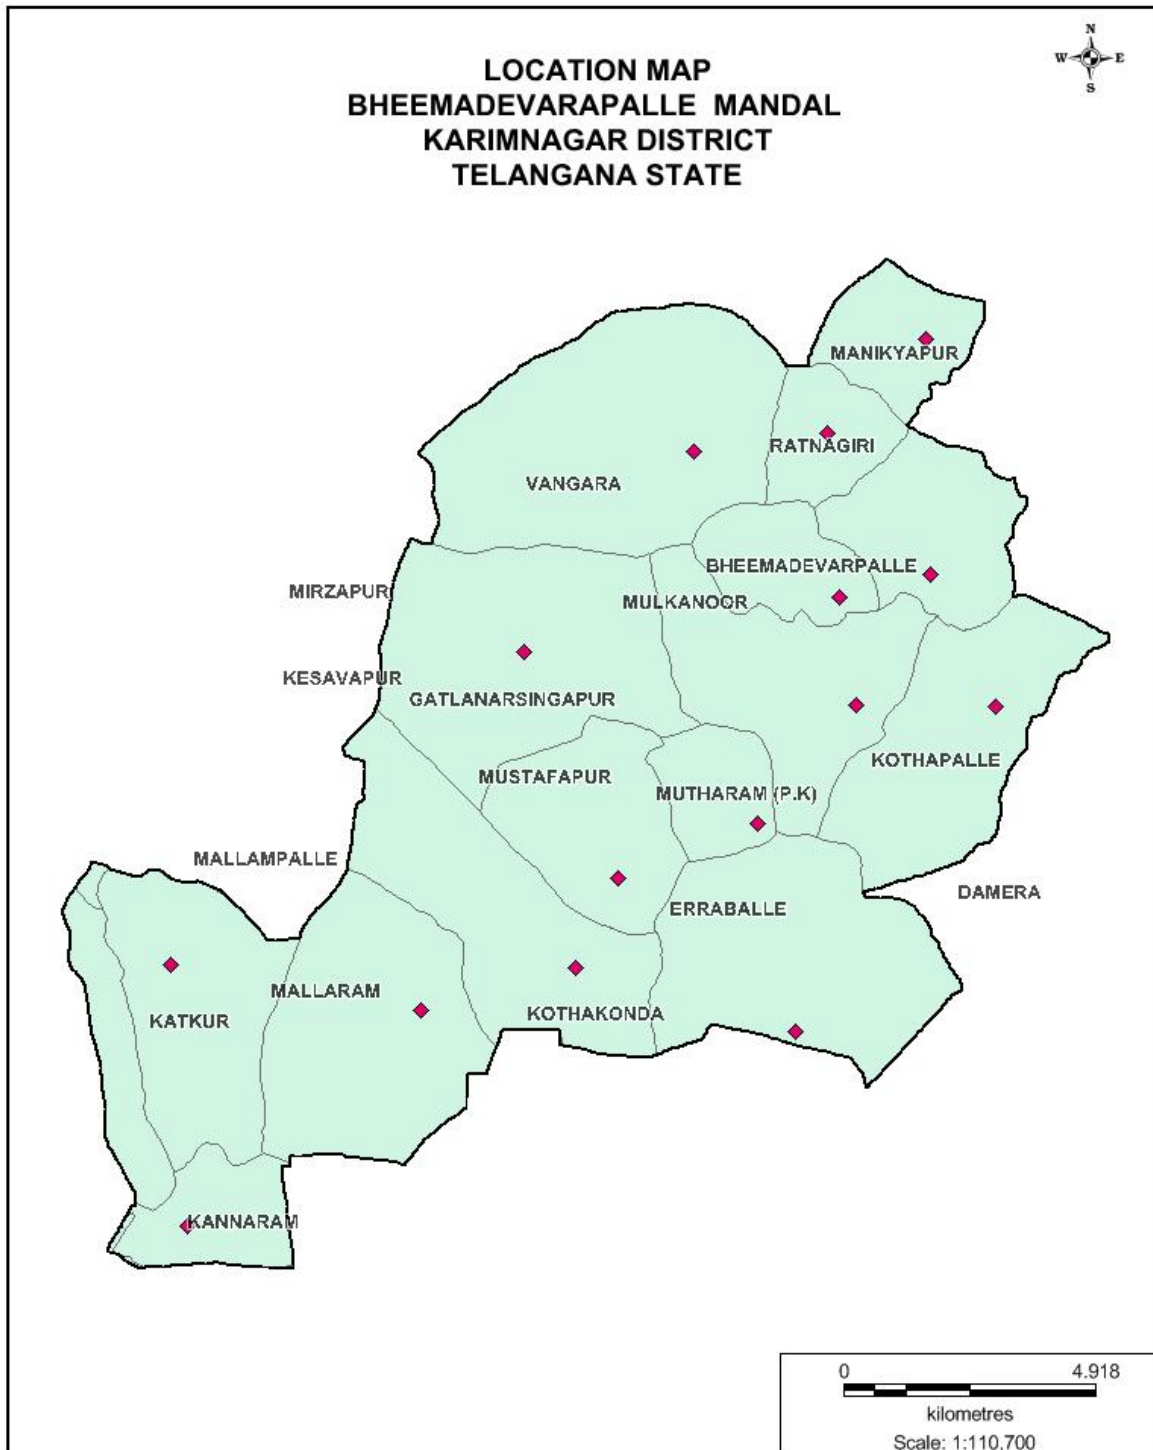

LEGEND



Village boundary



Village HQ

Fig.2

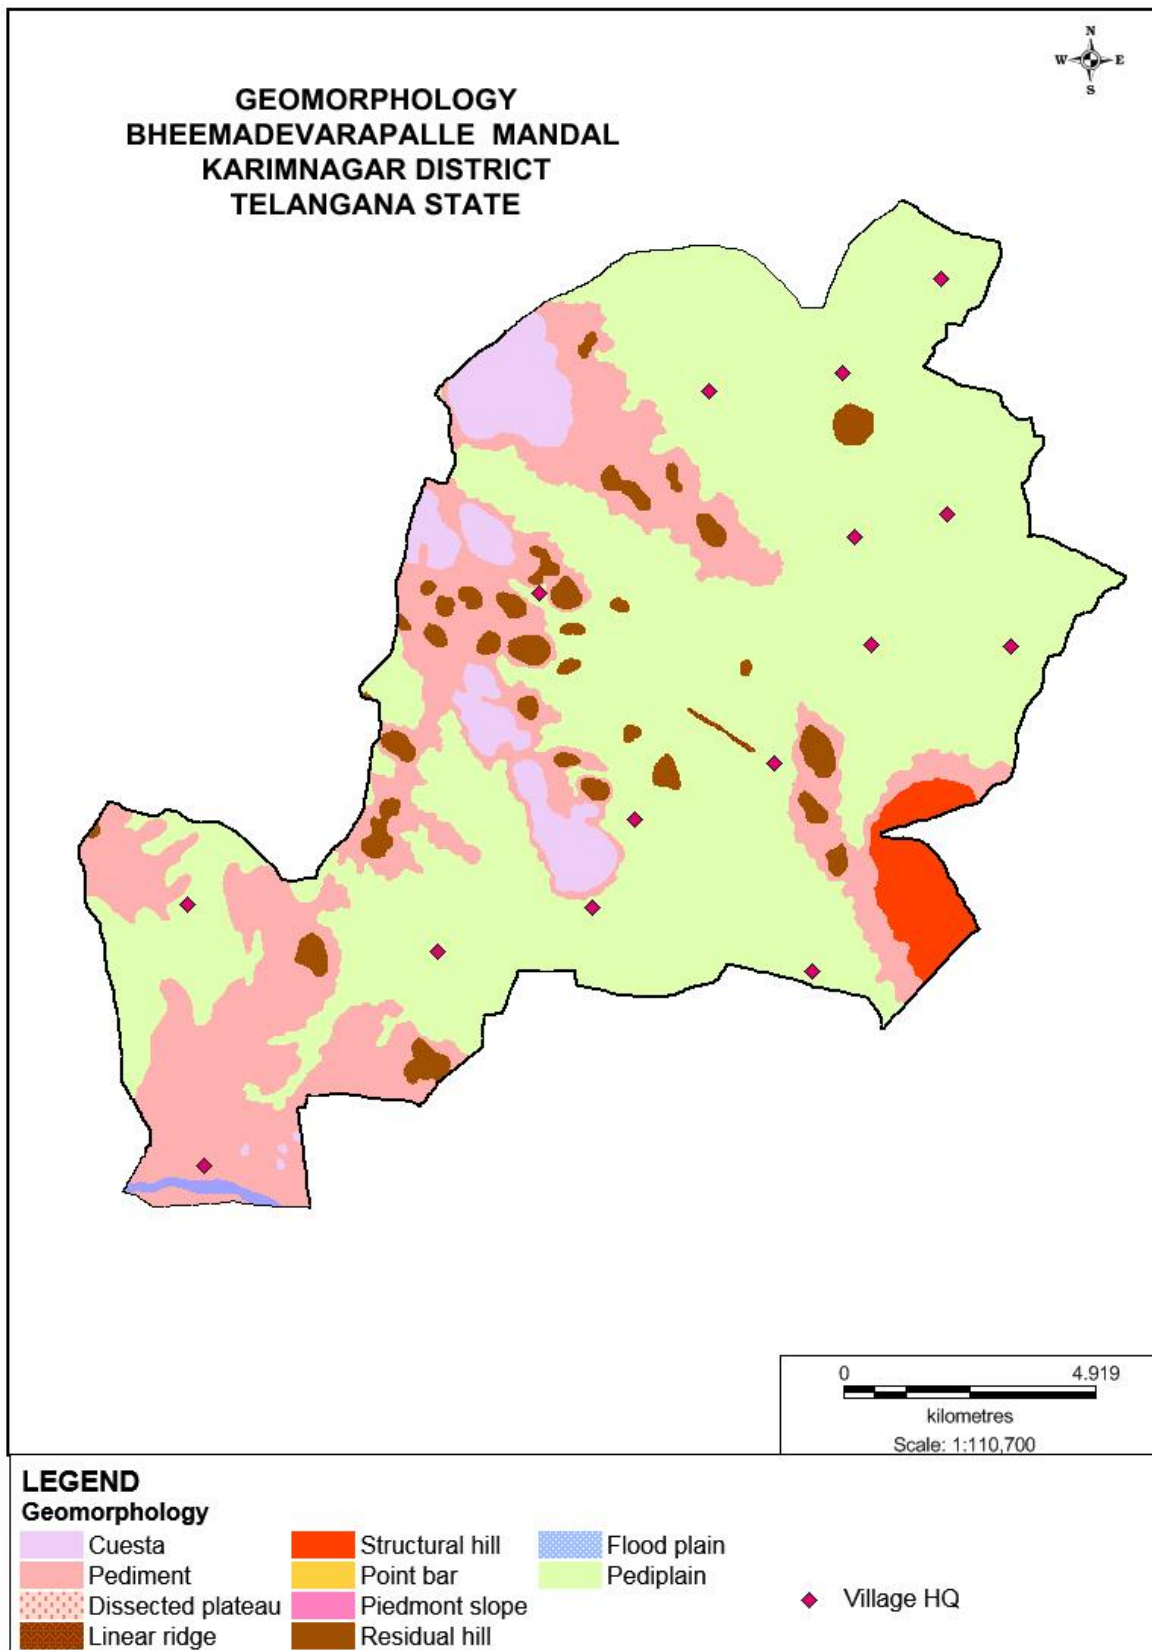


Fig.3

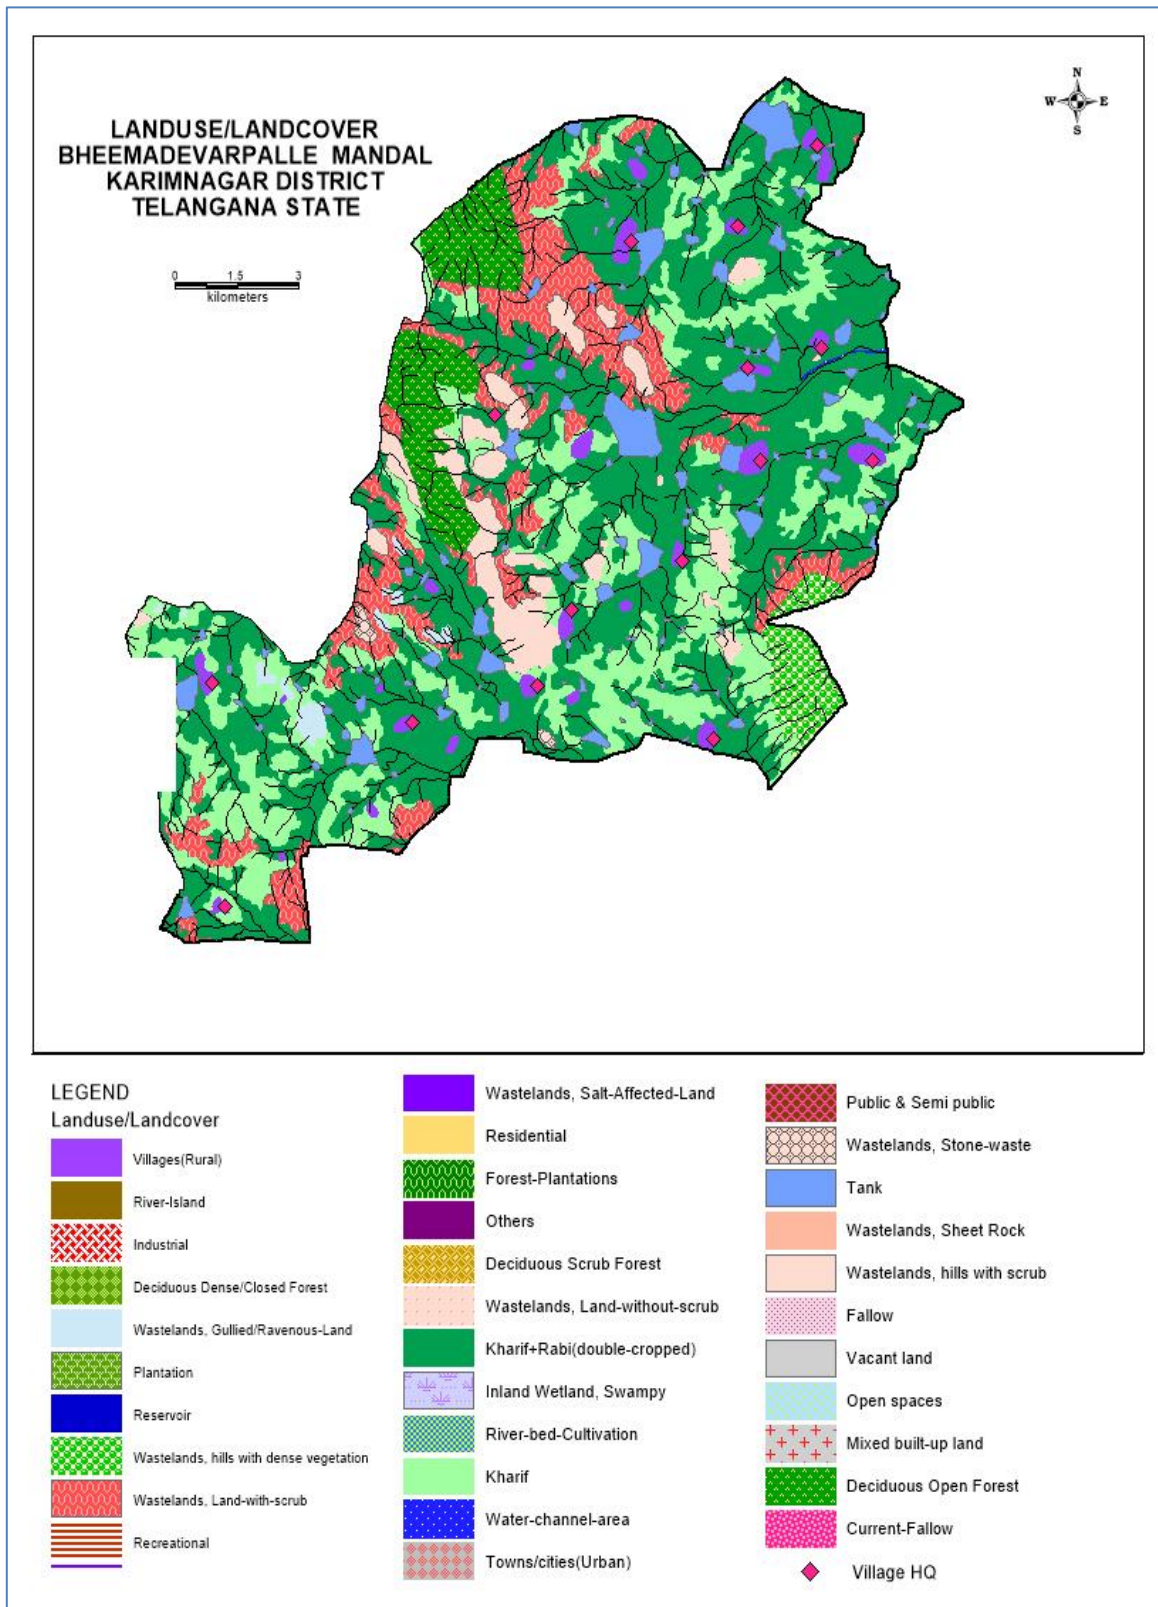


Fig.4

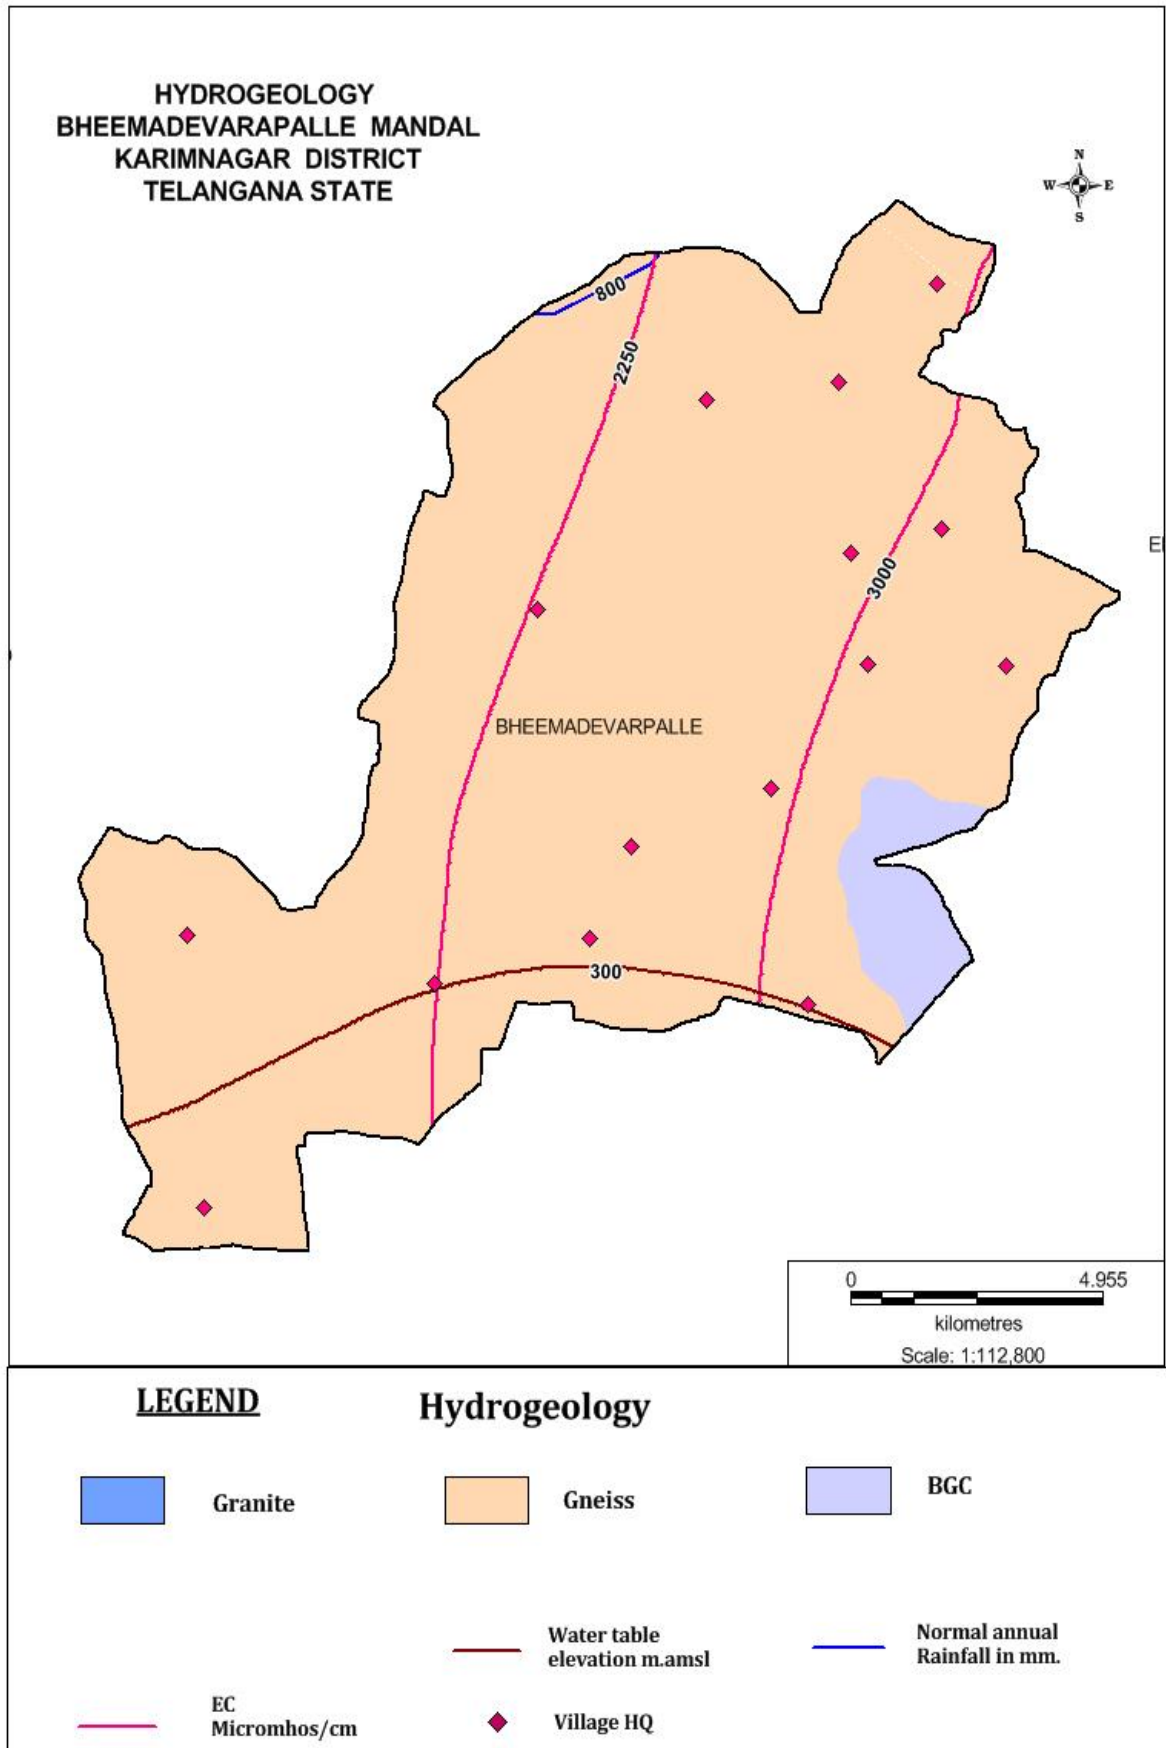


Fig.5

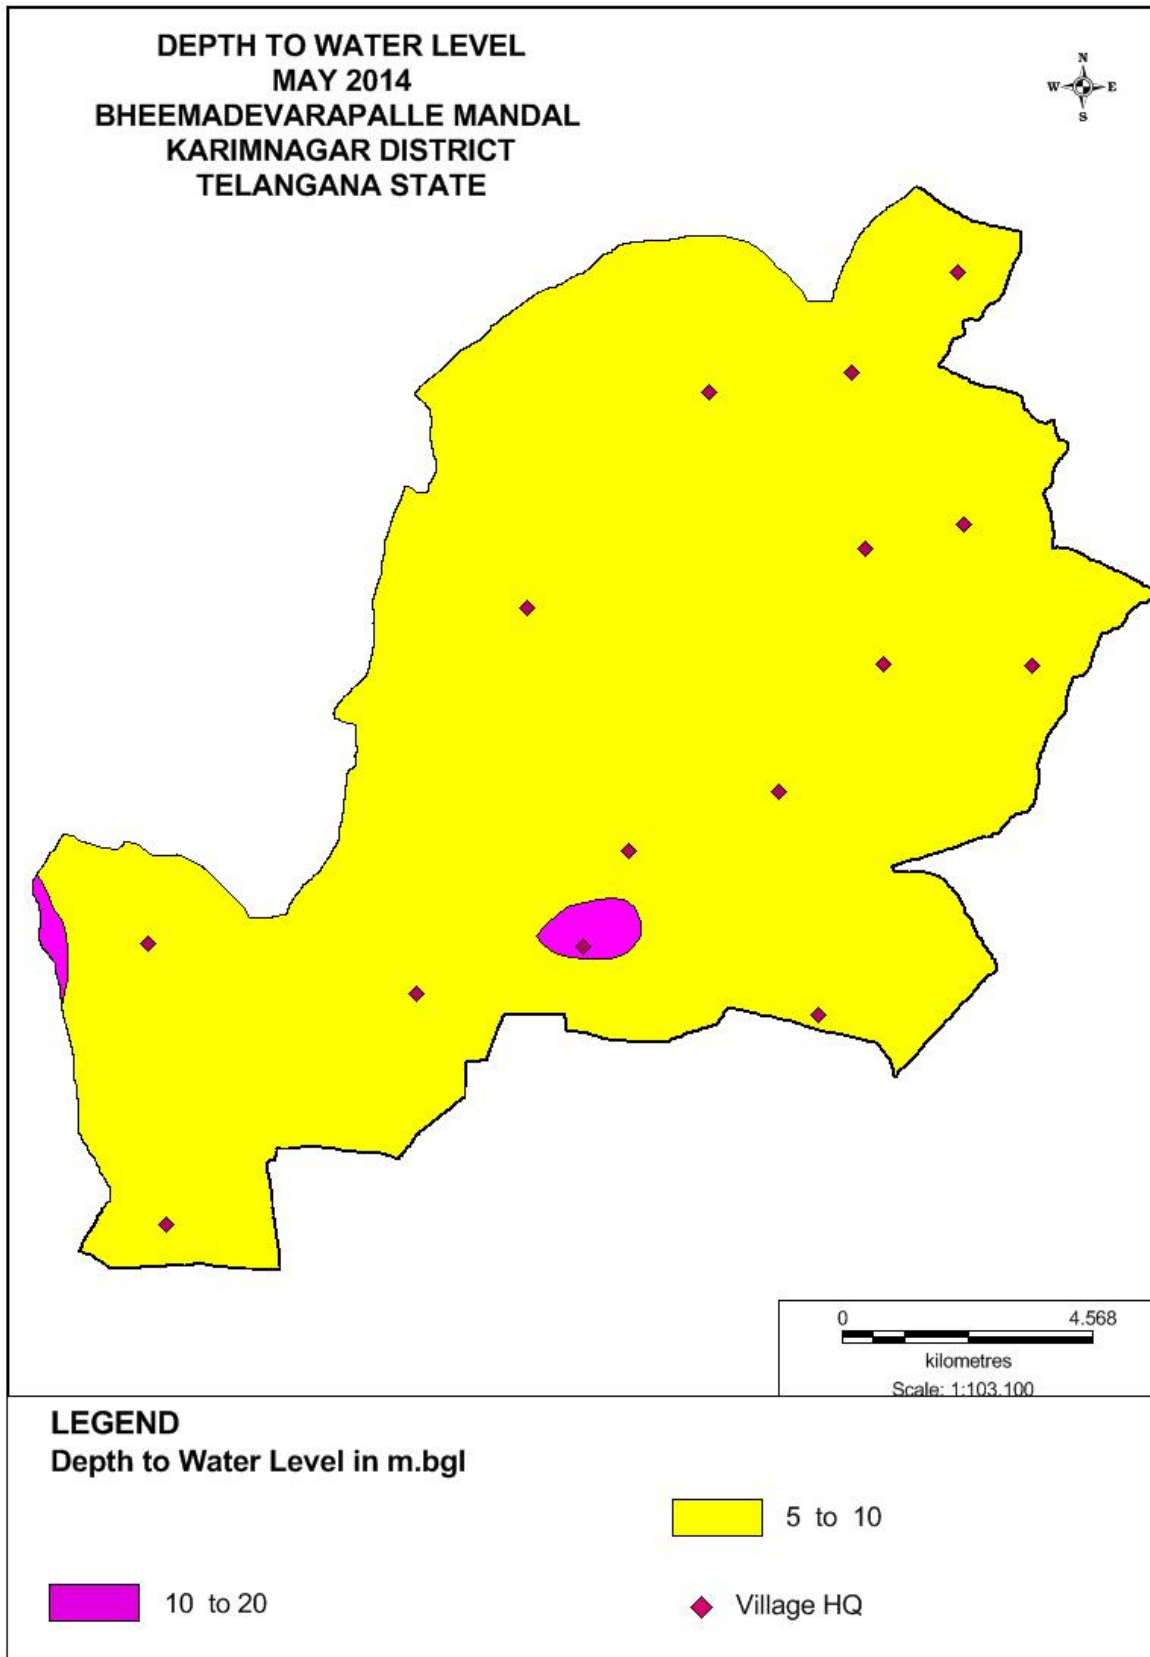


Fig.6

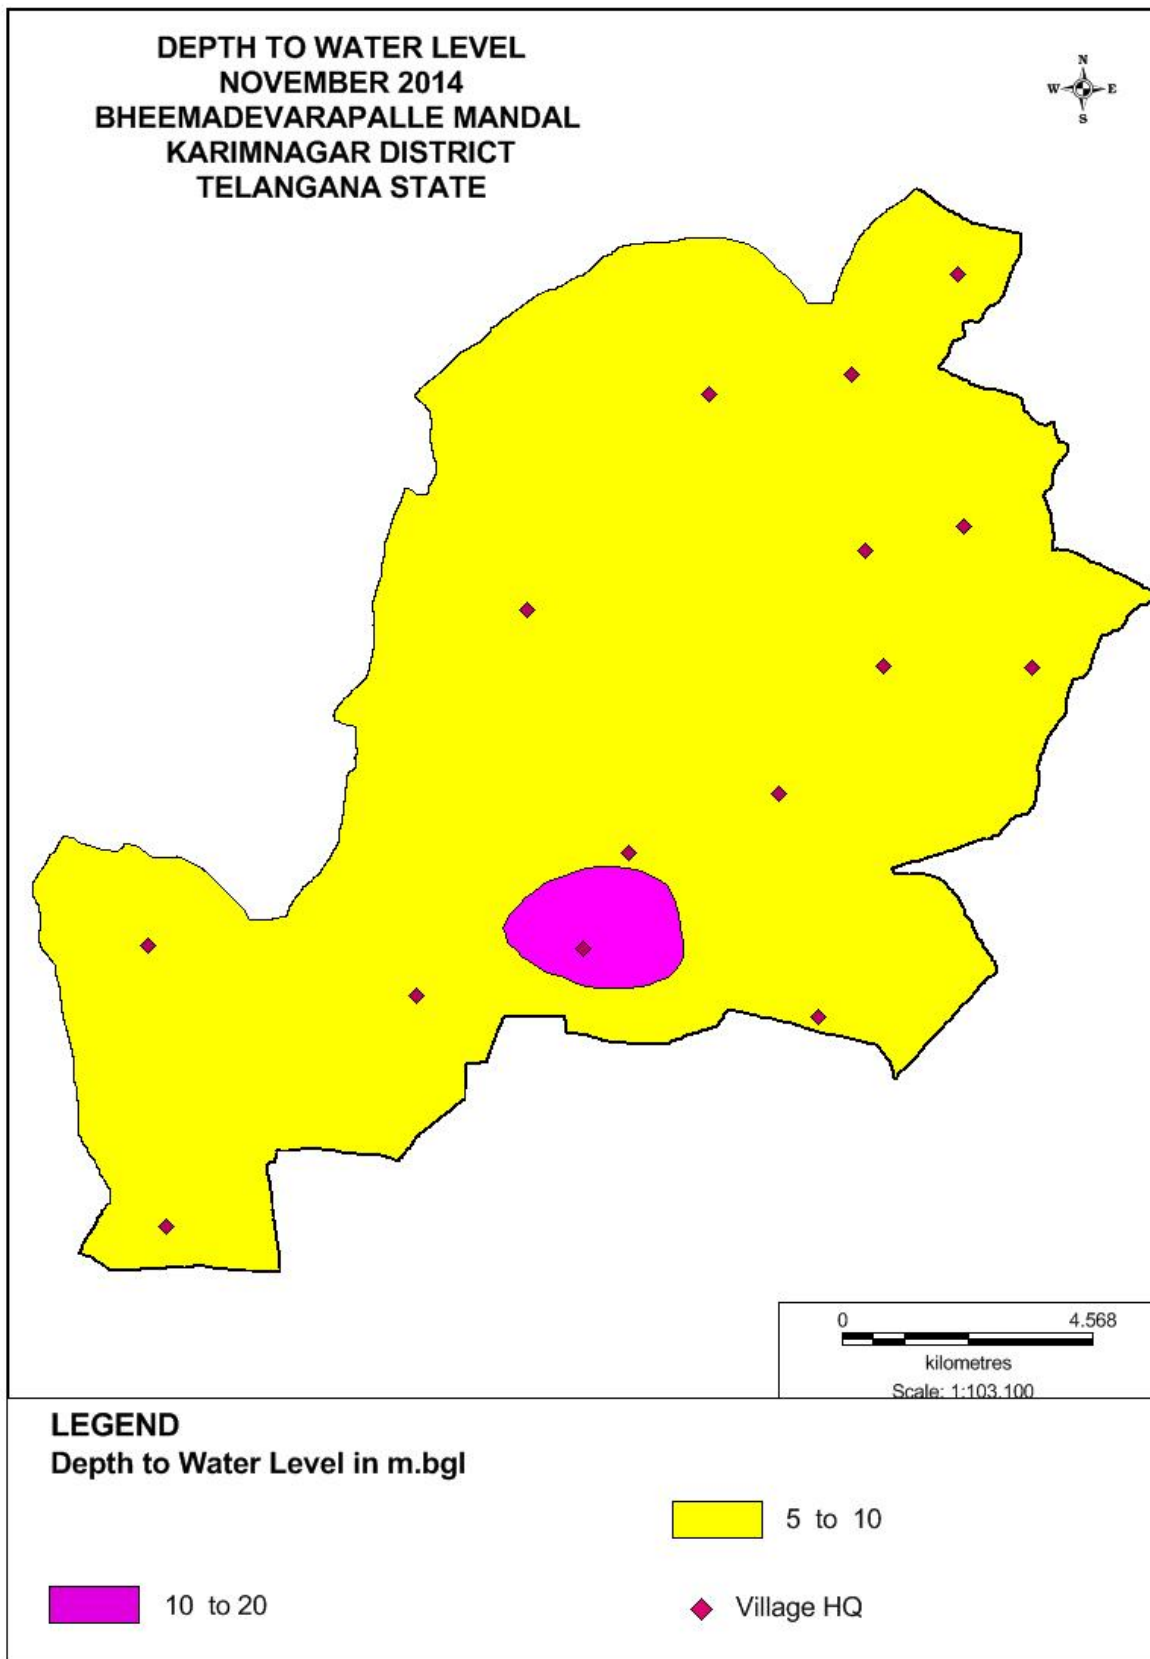


Fig.7

