



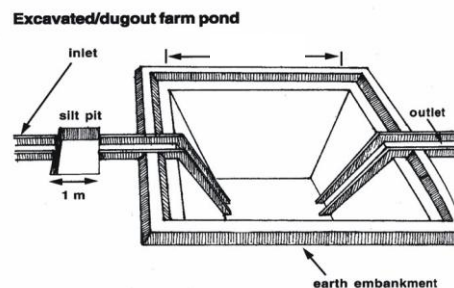

Plan on Artificial Recharge to Groundwater and Water Conservation in Palakkanoothu Firka, Dindigul Taluk, Dindigul District, Tamil Nadu

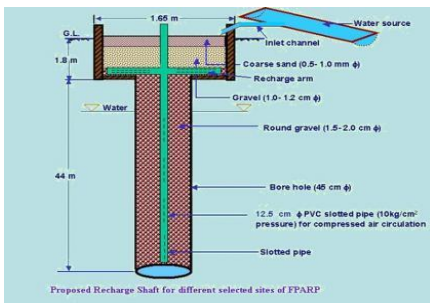

By

Central Ground Water Board
South Eastern Coastal Region
Rajaji Bhawan, Besant Nagar
Chennai

Content

S.No.	TOPIC
	At a Glance
1.	Introduction
2.	Objectives
3.	Study area details
	3.1 Location
	3.2 Geomorphological Setup
	3.3 Landuse and Soil
	3.4 Drainage
	3.5 Rainfall
	3.6 Hydrogeology
	3.7 Dynamic Ground water Resources
4.	Spatial data integration/ conservation
5.	Planning for recharge
	5.1 Justification of the artificial recharge
	5.2 Availability of surplus surface water for artificial recharge or conservation
	5.3 Proposed interventions including tentative location of artificial recharge structures and water conservation
	5.3.1 Artificial recharge
	5.3.1.1 Check Dam /Nala Bund
	5.3.1.2 Recharge shaft
	5.3.1.3. Revival , repair of water bodies
	5.3.2. Water Conservation Measure
	5.3.2.1 Farm Pond
	5.3.2.2 Micro irrigation system
6.	Tentative Cost Estimation
7.	Implication modalities
	a) Time schedule
	b) Operation and Maintenance

AT GLANCE	
Name of Firka	Palakkanoothu
Taluk	Dindigul
District	Dindigul
State	Tamil Nadu
Total area	99.56 Sq.km
Total suitable area	85.62
Lat. & Lon.	10° 22'07" to 10° 30' 31" & 77° 44' 36"to 77° 51' 25".
Rainfall	885.83 mm
Monsoon	705.62 mm
Non- Mon soon	180.21 mm
Geology	Crystalline metamorphic gneisses and Charnockites
WATER LEVEL	
Pre - Monsoon	5 to 10 m bgl.
Post - Monsoon	2 to 10 m bgl.
GROUND WATER RESOURCES ESTIMATION	
Replenish able ground water resources	13.99 MCM
Net ground water available	12.59 MCM
Ground water draft for irrigation	25.27 MCM
Groundwater draft for domestic & industrial water supply	0.92 MCM
Total ground water draft	26.18 MCM
Stage of ground water development (%)	208 %
Uncommitted surface runoff available for the Firka	10.54 MCM
Total volume of weathered zone	1195 MCM
Total volume available for recharge (considering 3 m depth from 3 m bgl)	498 MCM
ARTIFICIAL RECHARGE / CONSERVATION MEASURES	
Structures Proposed (tentative)	
Masonry Check dam	7
Nalla Bund	31
Revival, repair of pond, tanks with recharge shaft	4
Improving Water Efficiency /saving	
Micro irrigation system for 100 ha	0.7 MCM
Excepted groundwater recharge	0.92 MCM
Total expected groundwater recharge/ saving	1.62 MCM
Tentative total cost of the project	Rs. 3.77 Cr
Expected rise in water level by recharging /saving	1.25 m

Plan on Artificial Recharge to Groundwater and Water Conservation in Palakkanoothu Firka, Dindigul Taluk, Dindigul district, Tamil Nadu

1. Introduction

India is the largest user of groundwater in the world. Food grain security of the country is mainly dependent on water resources and groundwater play major role in irrigation sector. Imprints of Over-Exploitation on groundwater resources are being observed as steep deepening of water levels, drying up of shallow groundwater abstraction structures, ingress of salinity in fresh aquifers etc. which signal towards taking necessity of emergent action for artificial recharge and rainwater harvesting by utilizing surplus runoff and maintaining groundwater resources.

In Tamil Nadu dependency on groundwater has increased many folds during the recent years and the groundwater extraction for irrigation, domestic and industries have resulted in lowering of water levels, long-term water level declining trend and even drying up of wells. In order to regulate the groundwater development, Central Ground Water Board in association with State Ground Water Departments has computed Dynamic Groundwater Resources and categorized firkas as Over Exploited, Critical, Semi Critical and Safe.

Out of 1129 firkas (assessment units) of Tamil Nadu the category of groundwater development is over-exploited in 374 firkas, critical in 48 firkas, semi-critical in 235 firkas, safe in 437 firkas. And the rest 35 firkas are saline. Various measures such as rainwater harvesting, artificial recharge and water use efficiency are successfully practiced by some NGOs, Central and State governments which need replication at larger scale in close coordination with State government agencies and stakeholders, so that capacity building of state implementing agencies and awareness among stakeholders towards artificial recharge and rainwater harvesting can be made.

2. Objectives of the scheme

Objectives of the proposed scheme are


- To upscale recharge activities, supplement additional groundwater resources by harvesting surplus runoff, sustainability of groundwater resources at shallow depths
- Recovery of over-exploited groundwater areas by implementing artificial recharge measures in groundwater stress areas.
- Conservation, development and sustainable management of natural resources including their usage.

3. Study area details

3.1 Location

The total area of Palakkanoothu firka is 99.56 sq.km and Palakkanoothu firka lies between North latitudes 10°22'07" to 10°30'31" and east longitudes 77°44'36" to 77°51'25" and falls in Survey of India toposheet number 58F/15,11&14. Location map of Palakkanoothu firka is given in Figure 1.

Figure – 1

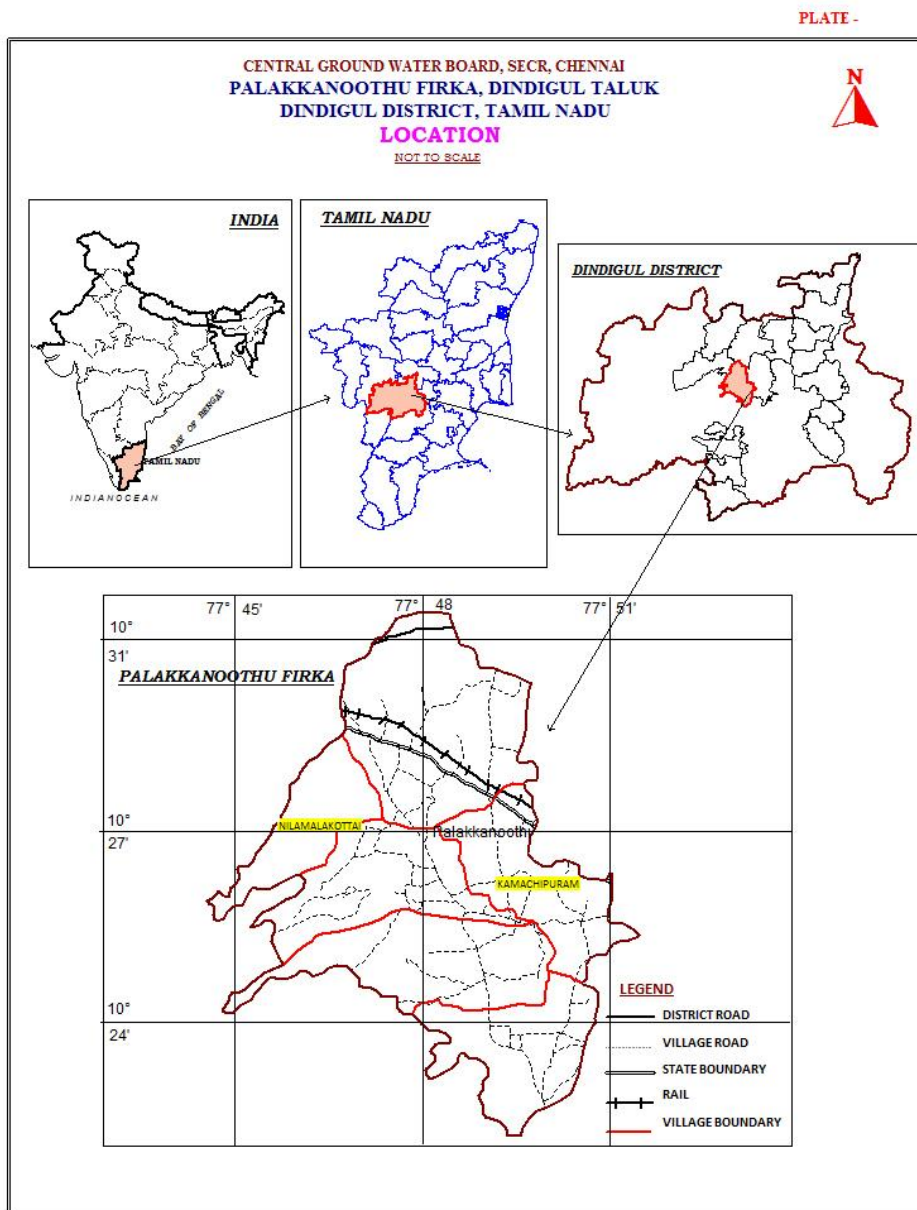


3.2 Geomorphological Set up

Geomorphologically, the area consists of hills and plain landforms. In plain landforms, Pediplain `weathered moderate and shallow are occupied major part of the firka. These landforms are influencing the ground water recharge. Hill landforms like residual hills, denudation hill and structural hills act as runoff zone. (Source: IRS, Anna university, Chennai Tamil Nadu). Geomorphological map prepared using IRS- 1D data on 1: 50,000 scale and units are as per NNRMS standards The height of the hills ranges from 300 to 1200 m amsl. The range consists of a series of detached hills covered by reserved forests. The various geomorphological units with its % of coverage area are given in table 1. and shown in figure 2.

Table 1. Various geomorphological units with its % of coverage area in Palakkanoothu firka

LANDFORMS	% of Area
Shallow pediment	42.54
Dissected/undessected	27.38
moderateate	12.76
Deflection slope	6.28
Structural hills	5.89
Highly dissected	3.08
Denudational/Residual hills	1.96
Inselburg	0.12


Figure-2

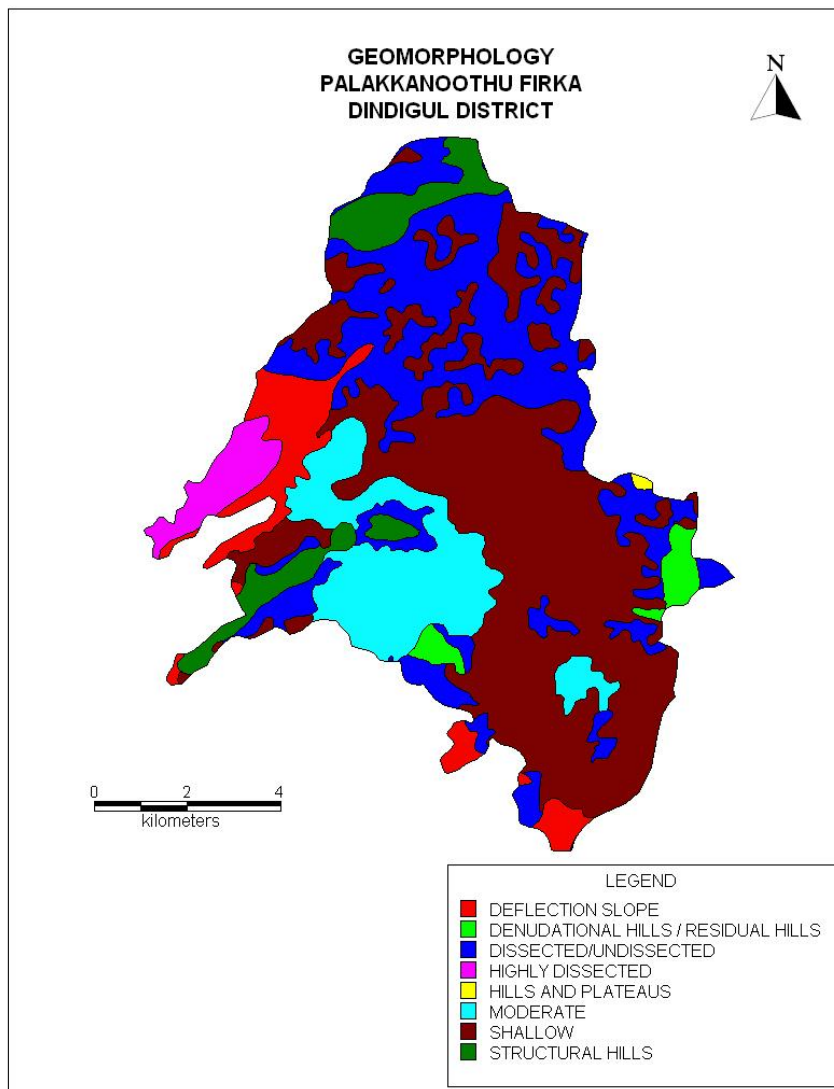

3.3 Land use and soil

The land use pattern of the Palakkanoothu Firka is given in figure 3. Predominantly the most of the area is characterised by the wet crop, plantation and dry crop (i.,e agricultural field)and accounts for 50 % of the total area of the firka(Source: IRS, Anna university, Chennai Tamil Nadu). This area is highly suitable for water conservation and recharge. The entire Firkas is occupied by rock outcrops with loamy soil.


Figure – 3

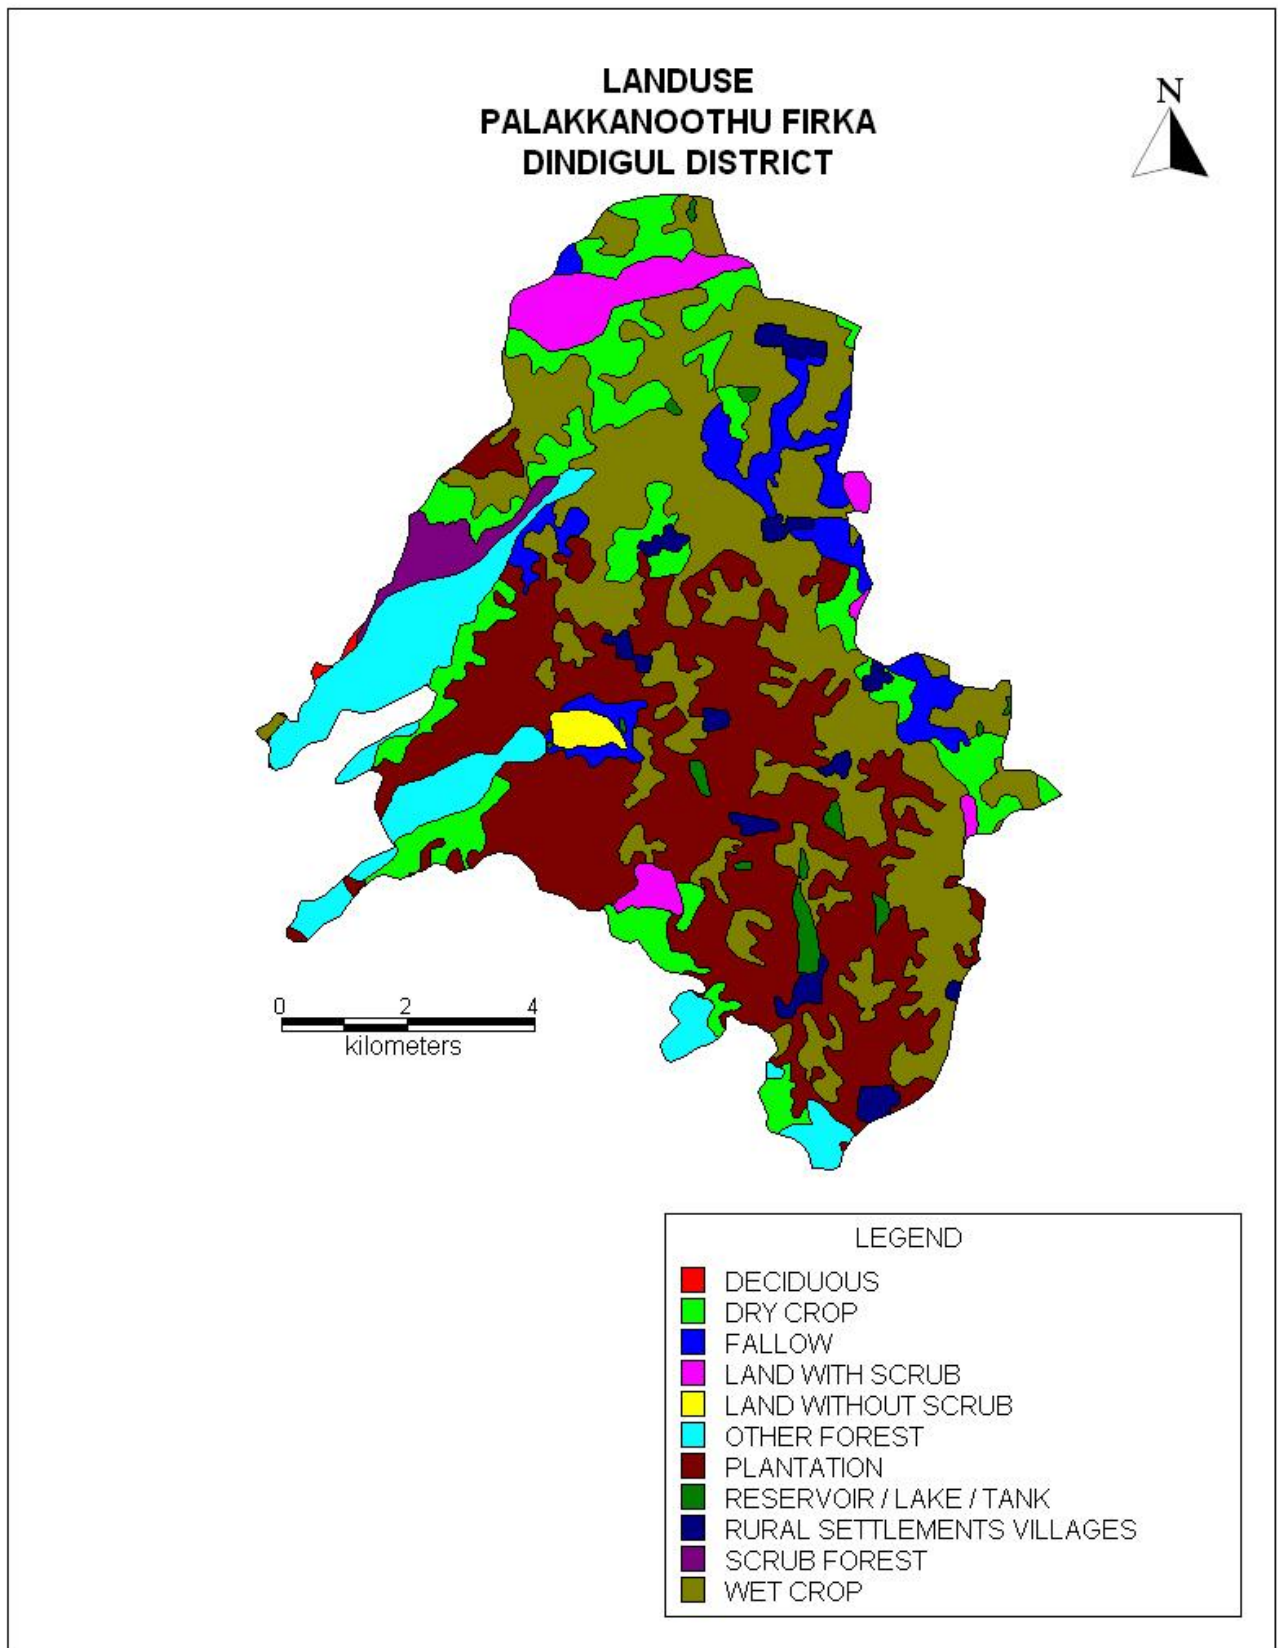

3.4 Drainage

The entire Firka area is within the Cauvery river basin. A number of small streams originate from the hills located in the Palakkanoothu firka, only and joins Kodavanar river, which is a tributary of Cauvery. Basin sub soil water is used to irrigate the lands. Tanks and surface water bodies are spread over the entire firka. The drainage pattern is the dendritic and sub- dendritic. The drainage map of Palakkanoothu firka is given in Fig 4.

Figure – 4

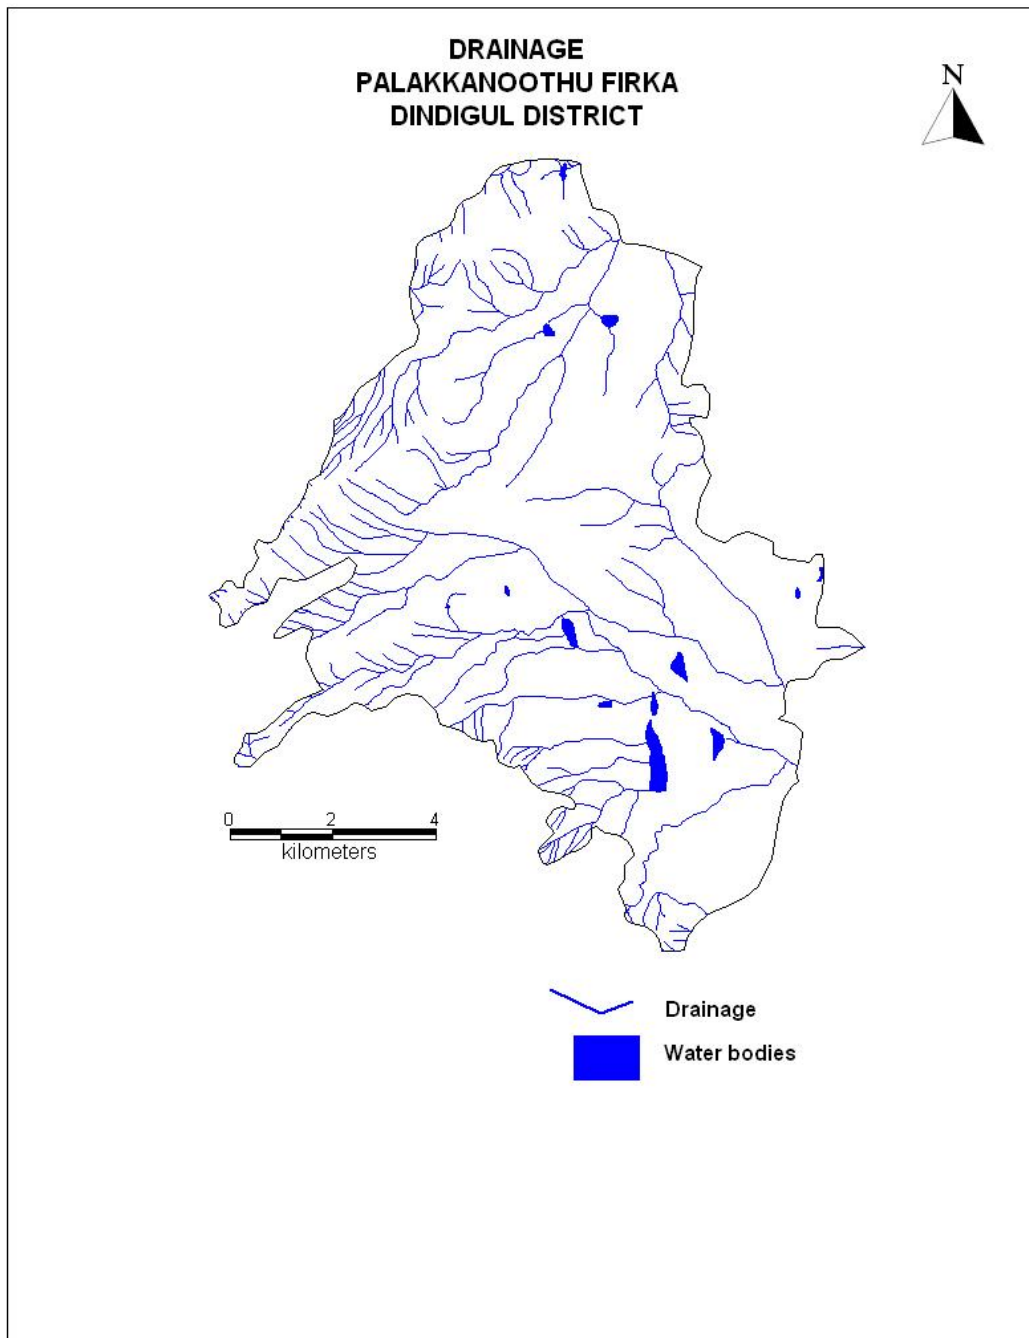

3.5 Rainfall

Palakkanoothu area falls under tropical climate. The period from April to June is generally hot and dry. The average temperature varies from 26 to 41° C. The humidity is relatively high in the mornings and varies between 65 and 85%. While in the afternoons it varies between 40 and 70%. Palakkanoothu Firkas receives rainfall from southwest monsoon (June – September), northeast monsoon (October – December) and non-monsoon periods (January – May). The area receives the major rainfall from northeast monsoon and the normal annual rainfall is 885.83mm.


Taluk	Name of Firkas	Area in sq.km	Monsoon rainfall (Jun to Dec) In mm	Non monsoon rainfall (Jan – May) In mm	Total Rainfall In mm
Dindigul	Palakkanoothu	99.56	705.62	180.21	885.83

3.6 Hydrogeology

The entire firka is underlain by the crystalline rocks consisting of Charnockites, Hornblede –Biotite gneiss, Epidote-Hornblede gneiss. Ground water occurs in pheratic condition in weathered and fractured gneiss rock formations. The weathering is highly erratic and the depth of abstraction structures is controlled by the degree of weathering and fracturing. Large diameter dug wells are more common ground water abstraction structures in the area. The diameter of the dug well is in the range of 5 to 10 m and depth of dug wells range from 10 to 18 m bgl. The dug wells yield up to 30-100 cu.m in summer months and few wells remains dry. The yield is adequate for irrigation for one or two crops in monsoon period. In summer it is inadequate as the groundwater storage reduces.

The hydrogeological map of Palakkanoothu firka is given in Figure 5. Decadal mean water level of pre-monsoon and post monsoon are given as fig 6a & 6b. The present water level in the firka is in the range of 5.00 to 10 m bgl.

Figure – 5

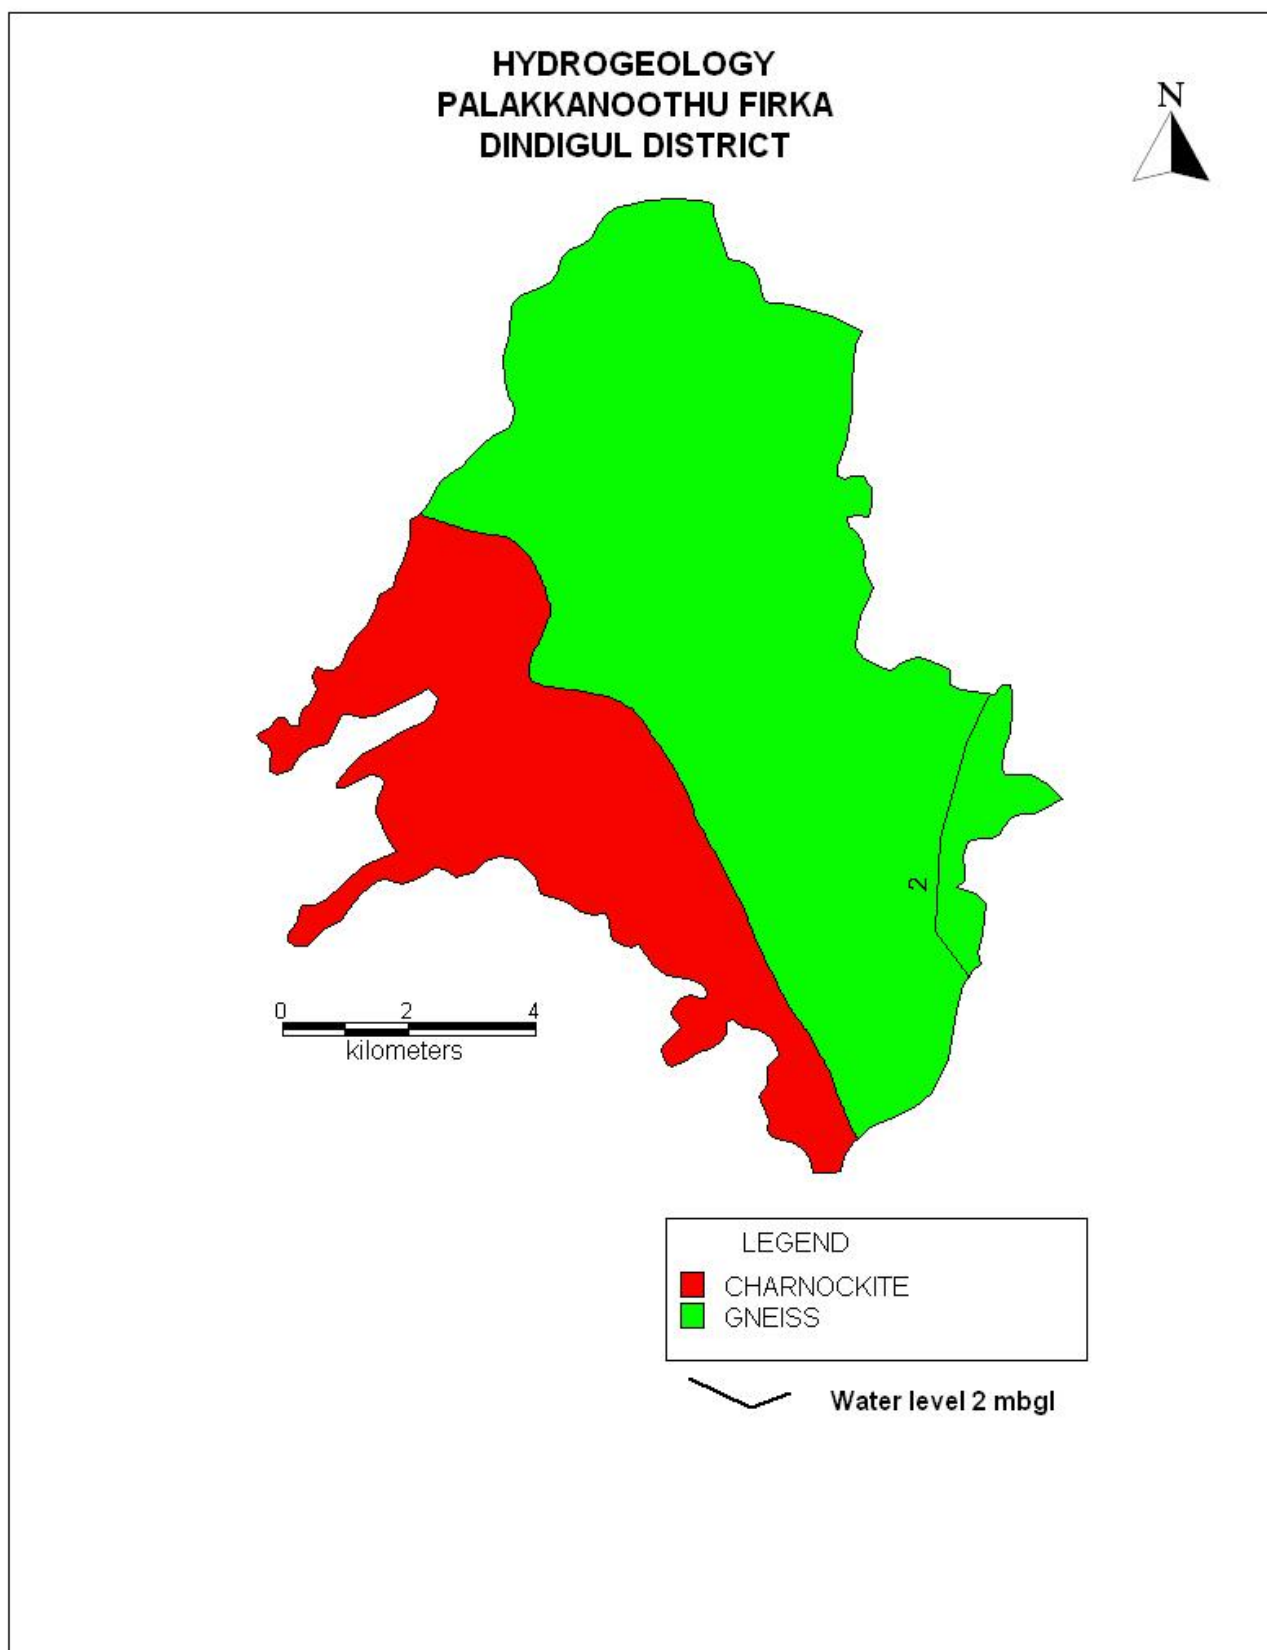

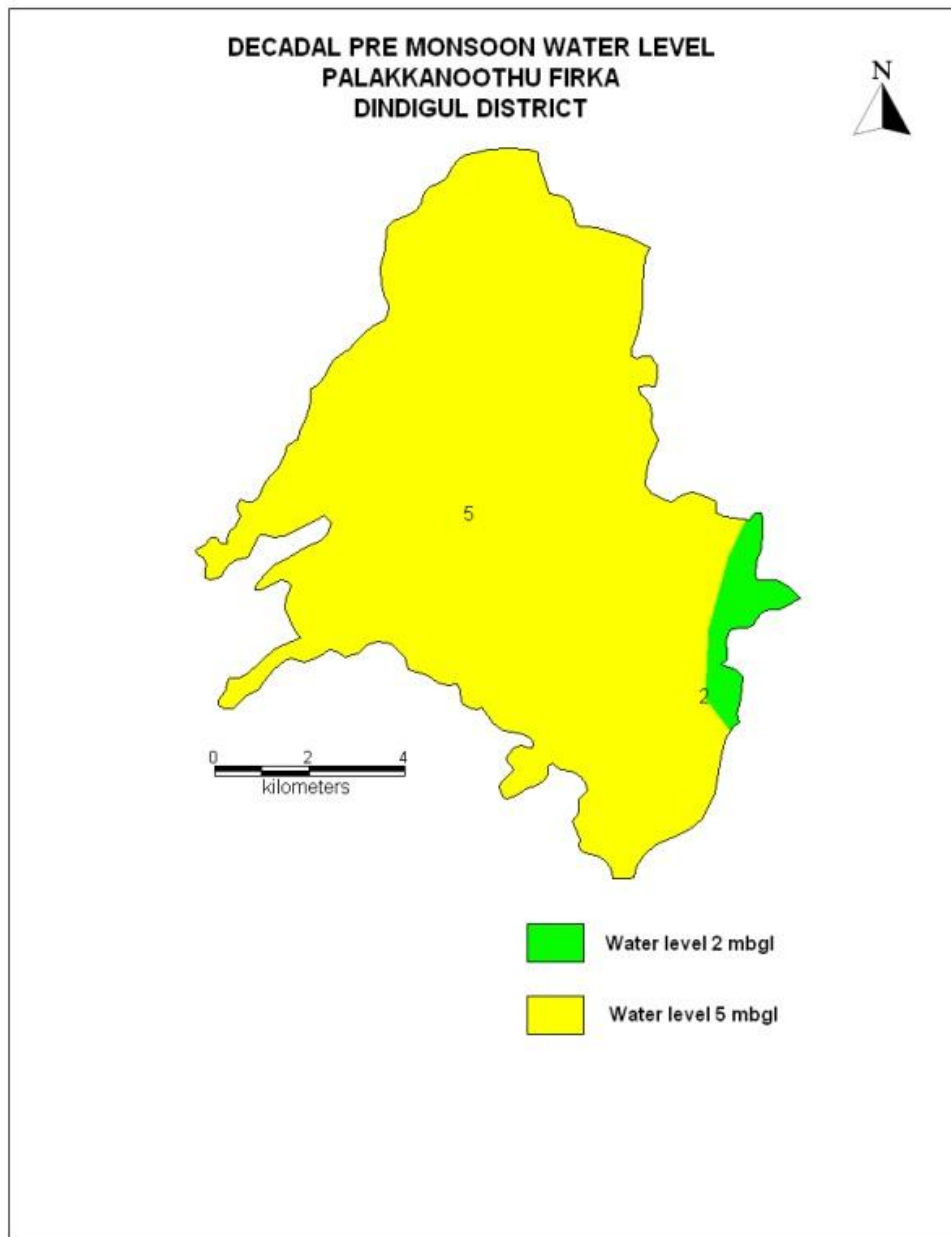


Figure 6a. Pre-monsoon water level in Palakkanothu firka (Decadal)

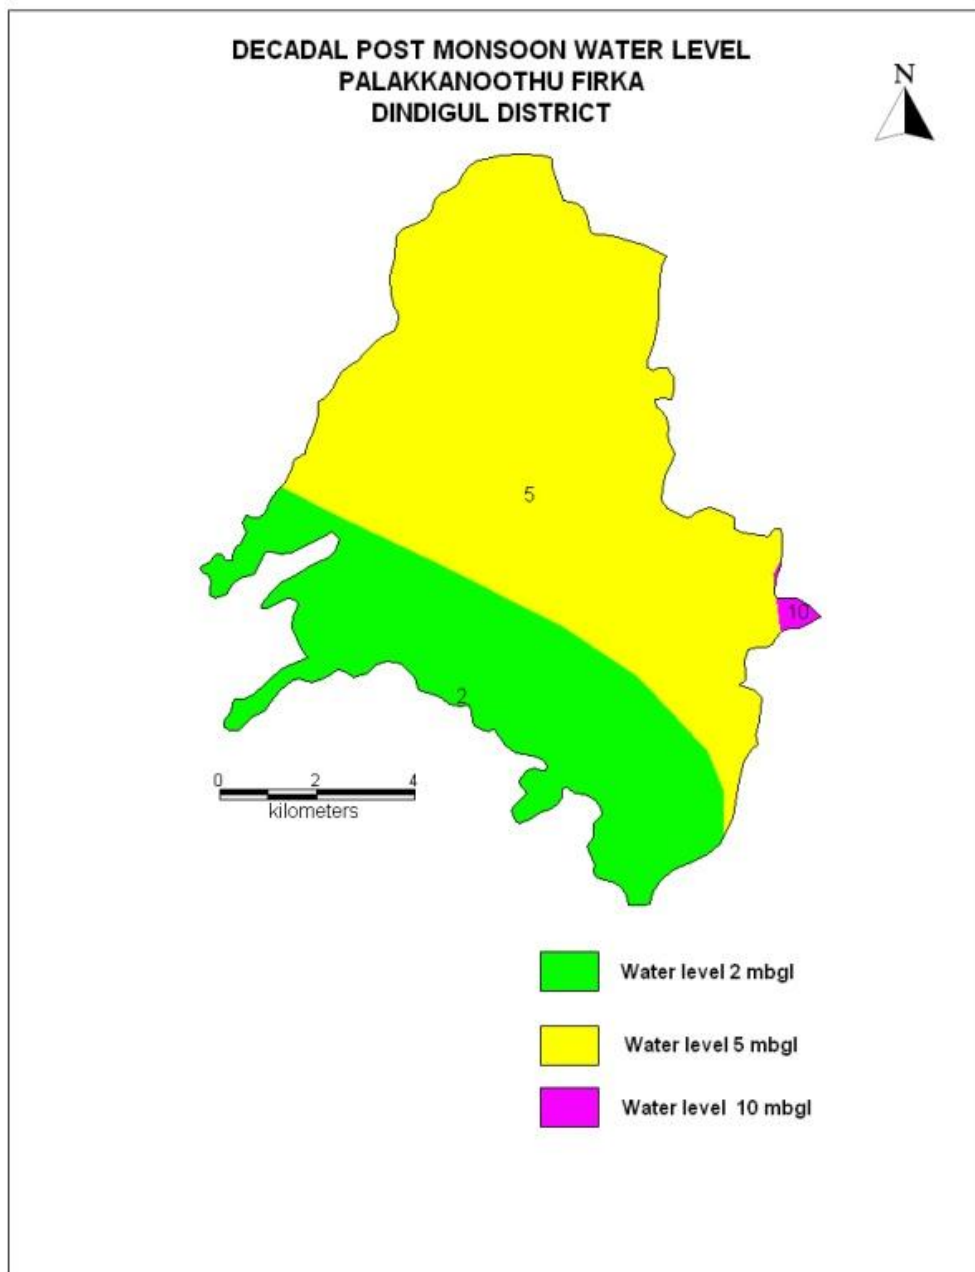


Figure 6b. Post-monsoon water level in Palakkanoothu firka (Decadal)

3.7 Dynamic Ground water Resources

The ground water resources have been computed jointly by Central Ground Water Board and State Ground Water Resources Data Centre (PWD, WRO, Govt. of Tamil Nadu) as on 31st March 2011. The computation has been done using GEC1997 methodology. The salient features of the computations are furnished in table 2.

Table 2. Dynamic Ground water resources estimation of Palakkanoothu firka

Firka	GW WORTHY AREA	REPLENISH ABLE GROUND WATER RESOURCES	NET GROUND WATER AVAILABLE	GROUND WATER DRAFT FOR IRRIGATION	GROUNDWATER DRAFT FOR DOMESTIC & INDUSTRIAL WATER SUPPLY	TOTAL GROUND WATER DRAFT	STAGE OF GROUND WATER DEVELOPMENT (%)	CATEGORY
	(Sq.Km)	(In MCM)					%	
Palakkanoothu	99.56	13.99	12.59	25.27	0.92	26.18	208	OVER EXPLOITED


4. Spatial Data Integration

The potential area for groundwater recharge is highly influenced by Geology, Geomorphology, Land use /land cover, Drainage, Surface Water Body, Weathered Thickness and first fractured Depth in the area. In order to ascertain the suitable area for groundwater recharge in firka, spatial data integration has been attempted using index overlay model in GIS environ. In this model, above seven layers have been integrated by assigning weightage to each layer either 20 or 10 and cumulative weight for all layers as 100. Geomorphology, weathered thickness and surface water bodies are assigned weightage of 20 each and the rest 4 layers viz., geology, land use, drainage and fractured depth have been assigned 10 each out of the total 100 scale, so as the total score would be 100 for all seven layers. Sub-classes of each theme has been assigned scores of 1-10 scale and then all the seven layers have been integrated and a map with feasible recharge zones has been generated. The resultant map has been reclassified into four classes (Very High-low integrated values) indicating the suitable area for artificial recharge and given in fig-7 and described below.

ZONE	% OF AREA COVERAGE	SIGNIFICANCE*
Very high	1	Suitable for all major recharge structures like Percolation pond and stop dam, check dam etc.,
High	12	Suitable for all major recharge structures like stop dam, check dam etc.,
Moderate	73	Suitable for all major recharge structures like earthen check dam, Boulder check dam and Nala bund etc.,
Poor	14	Hilly/Forest /Catchment area

*However, the field verification is required to confirm above potential area for groundwater recharge.

Figure - 7

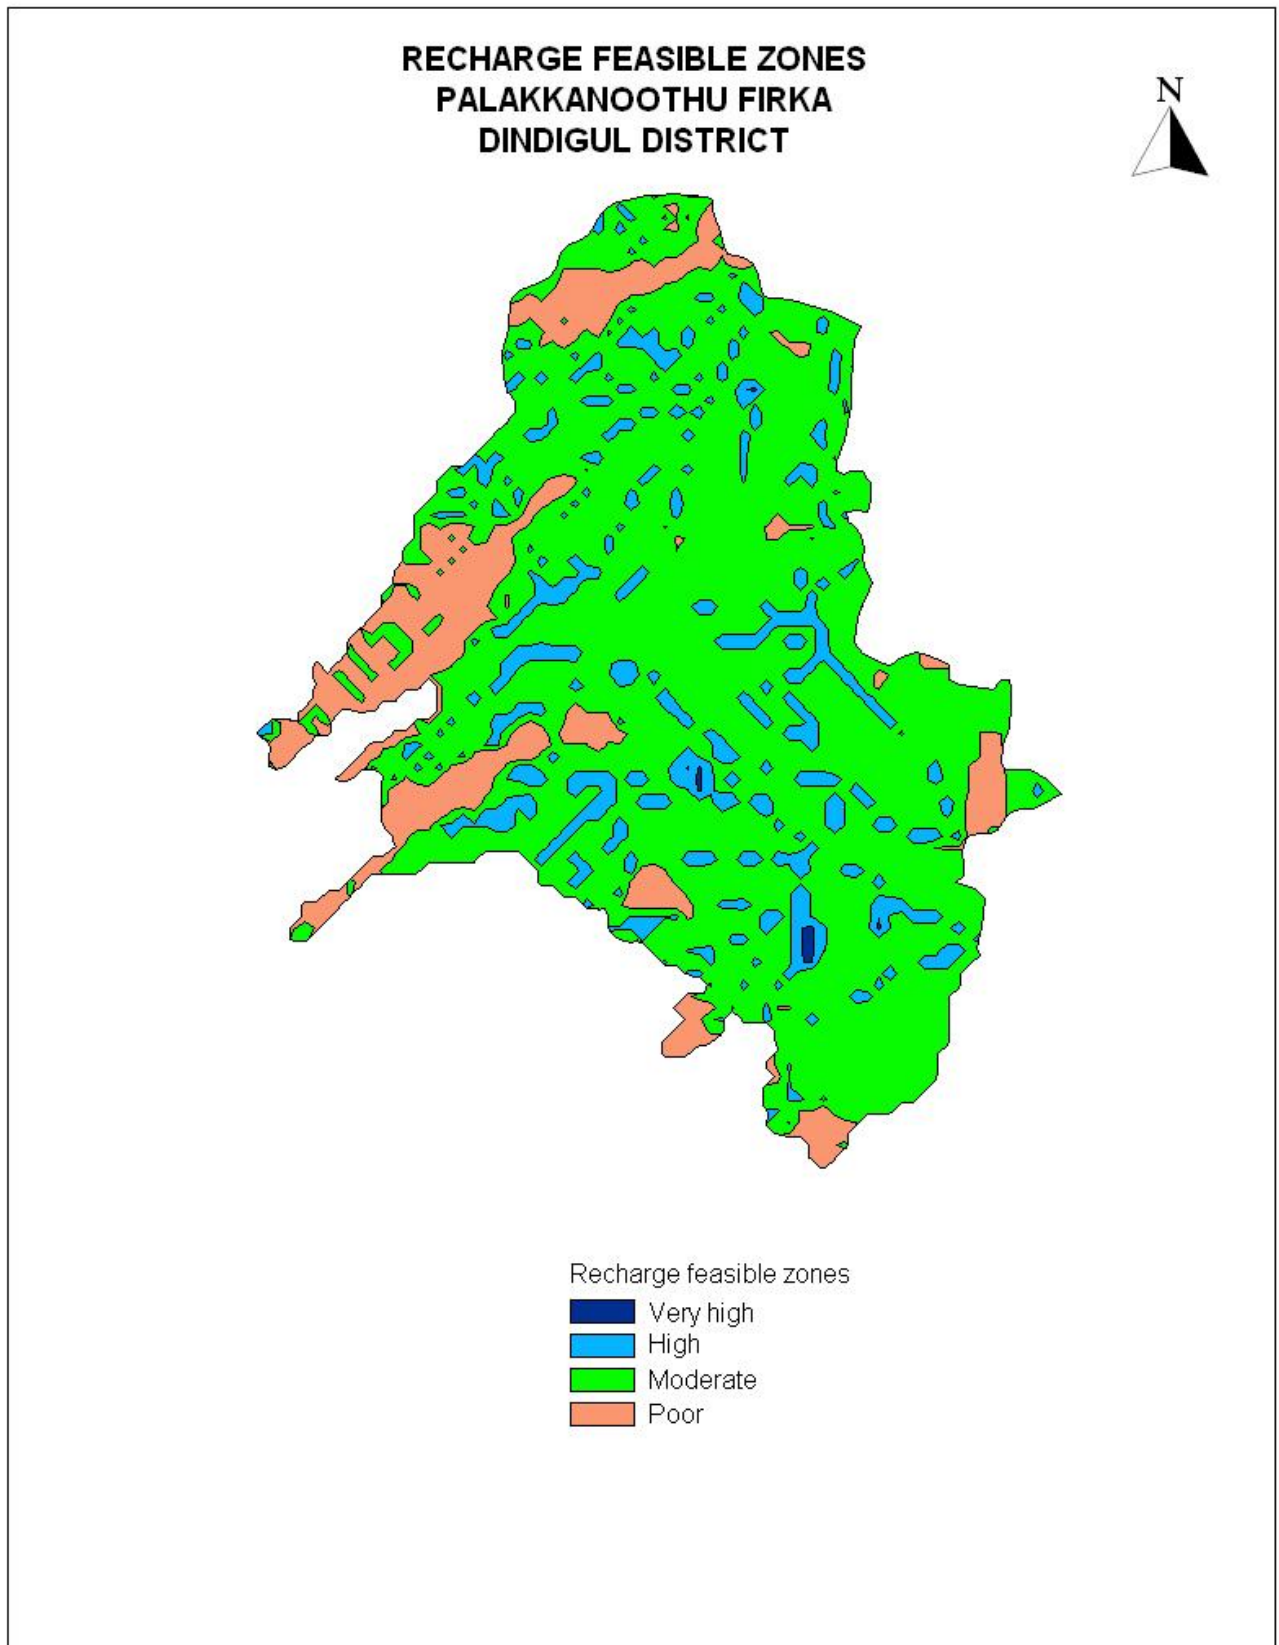

5. Planning for groundwater recharge /conservation

5.1 Justification of the artificial recharge & conservation measures

- ❖ The Palakkanoothu Firkas is with high stage of groundwater development i.e, 208 % and with sufficient amount of uncommitted surface runoff/flow of 10.54 MCM.
- ❖ The total weathered zone available beneath the ground in the firka is 1195 MCM. Out of these total volume available for recharge considering 5 m depth from 3 m) is 498 MCM.
- ❖ The Palakkanoothu Firka consists of 14 surface water bodies /lakes which are well connected by the drainage. Revival and Recharge of these ponds will enhance the sustainability of the ground water abstraction structures.
- ❖ However, most of the ground water developments for agricultural purposes are met through dug-cum bore well and bore wells only. Hence, there is sufficient scope of recharge.
- ❖ Model generated in the Palakkanoothu areas reveals that more than 80 % of areas are suitable for recharge.
- ❖ In Palakkanoothu firka more than 50 % area is characterised by the agricultural activities, there is sufficient scope for the water conservation measures for enhance the crop production and better ground water development.

5.2 Availability of surplus surface water for artificial recharge or conservation

The uncommitted surface flow for Palakkanoothu Firka is estimated as per the norms followed by State Ground & Surface Water Resources data centre, PWD, Taramani, Chennai (Aug 2015). The available of surplus surface water for Palakkanoothu Firka is 10.54 MCM.

5.3 Proposed interventions including tentative location of artificial recharge /conservation measures

On basis of above description the following three type of approach have been made to propose artificial recharge or conservation structures.

- a. Artificial recharge
- b. Water conservation measure
- c. Water Efficiency

5.3.1 Artificial recharge

The details of artificial recharge structures proposed along with justification are given below.

5.3.1.1 Check dam/Nala bund

Palakkanoothu firka area is covered by the seasonal nallahs/drains which carry heavy discharge during monsoon period is debauched into the water bodies within a short duration. It is proposed that such seasonal nala will be identified and the rain water will be harnessed through construction of series of check dams, nala bund and gabion structures so as to harness this water thereby increasing the resident period of the water in these channels and to increase the soil moisture content. As per the integrated model prediction, it is proposed to construct 7 Check dams and 31 Nala bunds. The

tentative location of these ARs are given below and shown in Plate 1. The size and location of these structures are tentative and details field survey is essential to ascertain the exact size and location.

Tentative location of proposed 7 Check dam in Palakkanoothu firka

S. NO.	LATITUDE(DD)	LONGITUDE(DD)	TYPE OF ARS
1	10.3933	77.8112	Check Dam
2	10.4054	77.8027	Check Dam
3	10.4215	77.7807	Check Dam
4	10.4281	77.7633	Check Dam
5	10.4545	77.7911	Check Dam
6	10.4754	77.8237	Check Dam
7	10.4747	77.8049	Check Dam

Tentative location of proposed 31 Nalla bund in Palakkanoothu firka

SL.NO	LATITUDE	LONGITUDE(DD)	TYPE OF ARS
1	10.3799	77.8227	NALLA BUND
2	10.3915	77.8159	NALLA BUND
3	10.3952	77.8098	NALLA BUND
4	10.4489	77.7819	NALLA BUND
5	10.4568	77.7898	NALLA BUND
6	10.4718	77.7919	NALLA BUND
7	10.4821	77.7927	NALLA BUND
8	10.4857	77.7986	NALLA BUND
9	10.4922	77.809	NALLA BUND
10	10.4495	77.8218	NALLA BUND
11	10.4477	77.8197	NALLA BUND
12	10.4288	77.8226	NALLA BUND
13	10.399	77.8073	NALLA BUND
14	10.4	77.8037	NALLA BUND
15	10.4256	77.7879	NALLA BUND
16	10.4245	77.7868	NALLA BUND
17	10.4258	77.7617	NALLA BUND
18	10.4301	77.7651	NALLA BUND
19	10.4319	77.7678	NALLA BUND
20	10.4332	77.7709	NALLA BUND
21	10.4361	77.7733	NALLA BUND
22	10.4391	77.7741	NALLA BUND
23	10.4417	77.7769	NALLA BUND
24	10.4435	77.7783	NALLA BUND
25	10.4689	77.7793	NALLA BUND
26	10.4659	77.7746	NALLA BUND
27	10.4854	77.7794	NALLA BUND
28	10.4946	77.813	NALLA BUND
29	10.4794	77.8264	NALLA BUND
30	10.5043	77.7937	NALLA BUND
31	10.5057	77.7953	NALLA BUND


5.3.1.2. Revival, repair of water bodies

The existing ponds and tanks in loose their storage capacity as well as the natural ground water recharge through these water bodies has also become negligible due to siltation and encroachment by farmers for agriculture purposes. There are several such villages where ponds/ tanks are in dilapidated condition. These existing village tanks which are normally silted and damaged can be modified to serve as recharge structure in case these are suitably located to serve as percolation tanks. Through desilting, coupled with providing proper waste weir, the village tanks can be converted into recharge structure. Several such tanks are available in the area which can be modified for enhancing ground water recharge. Studies, however, are needed to ascertain whether the village tanks are suitably located to serve as recharge structures. The locations of about 4 existing ponds/tanks have been identified with latitude and longitude given below and marked on Plate 1. The above 4 tanks/ponds could be taken up for the renovation with recharge shaft.

Tentative location of proposed de-siltation of pond/tanks with recharge shaft in Palakkanoothu firka.

Sl. No.	LATITUDE	LONGITUDE	STRUCTURE	ACTION
1	10.4299	77.7844	TANK/ RESERVOIR	DESILTATION AND RECHARGE
2	10.4328	77.795	TANK/ RESERVOIR	DESILTATION AND RECHARGE
3	10.4323	77.8465	TANK/ RESERVOIR	DESILTATION AND RECHARGE
4	10.4355	77.8506	TANK/ RESERVOIR	DESILTATION AND RECHARGE

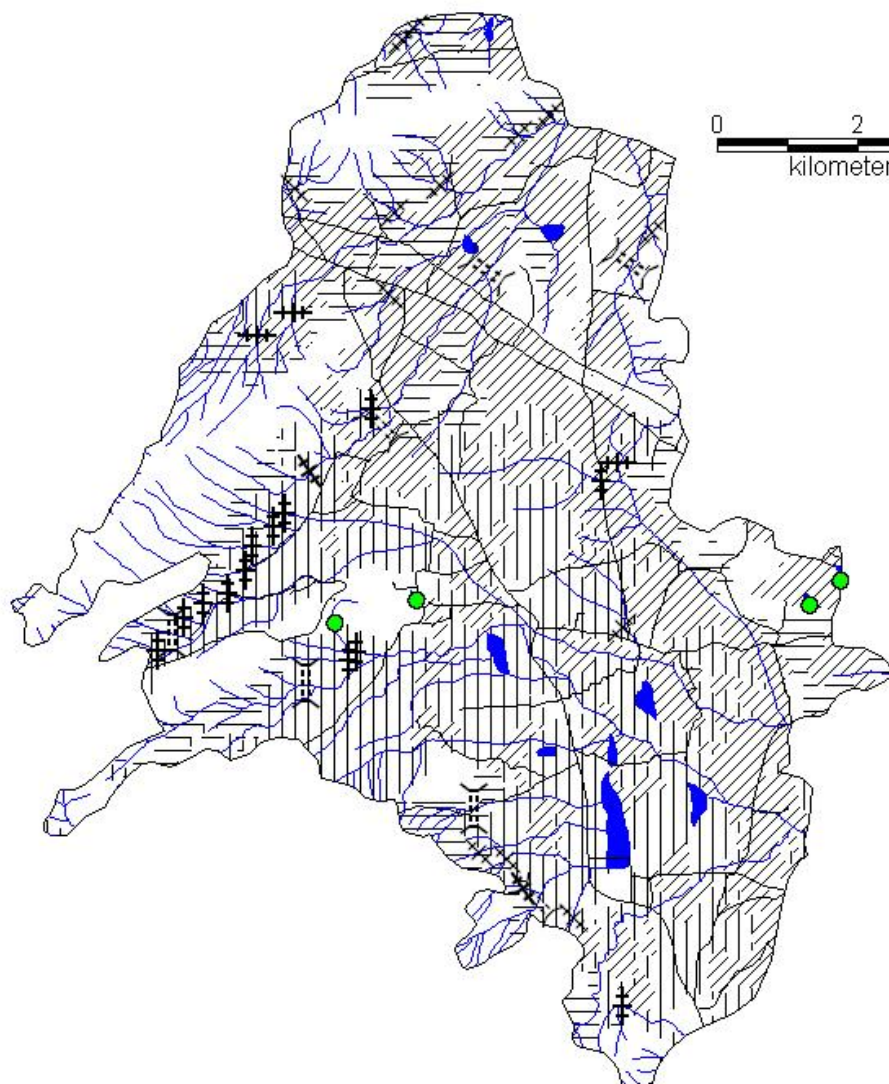


**PROPOSED ARTIFICIAL RECHARGE STRUCTURES
PALAKKANOTHU FIRKA, DINDIGUL TALUK
DINDIGUL DISTRICT, TAMIL NADU**






LEGEND

-  Drainage
-  Tank/Reservoir
-  Road

PROPOSED TYPE OF ARS

-  Nala Bund (31)
-  Check Dams (7)
-  Desilatanation and Recharge shaft (4)

AREA SUITABLE FOR MICRO IRRIGATION & FARM PONDS

-  Dry crop area
-  Plantation area
-  Wet crop area

5.3.2 Water conservation measure


5.3.2.1 Farm Pond

A farm pond is a large dug out in the earth, usually square or rectangular in shape, which harvests rainwater and stores it for future use. It has an inlet to regulate inflow and an outlet to discharge excess water. The pond is surrounded by a small bund, which prevents erosion on the banks of the pond. The size and depth depend on the amount of land available, the type of soil, the farmer's water requirements, the cost of excavation, and the possible uses of the excavated earth. Water from the farm pond is conveyed to the fields manually, by pumping, or by both methods.

Advantages of Farm Ponds

- They provide water to start growing crops, without waiting for rain to fall.
- They provide irrigation water during dry spells between rainfalls. This increases the yield, the number of crops in one year, and the diversity of crops that can be grown.
- Bunds can be used to raise vegetables and fruit trees, thus supplying the farm household with an additional source of income and of nutritious food.
- Farmers are able to apply adequate farm inputs and perform farming operations at the appropriate time, thus increasing their productivity and their confidence in farming.
- They check soil erosion and minimize siltation of waterways and reservoirs.
- They supplies water for domestic purposes and livestock
- They promote fish rearing.
- They recharge the ground water.
- They improve drainage.
- The excavated earth has a very high value and can be used to enrich soil in the fields, levelling land, and constructing farm roads

As per the Landuse classification of the firka, majority of the area is covered by the agricultural field. Hence it is proposed to construct 100 farm ponds as per the specification of AED, Govt. of Tamil Nadu (30 x 30 x 1.5 m).

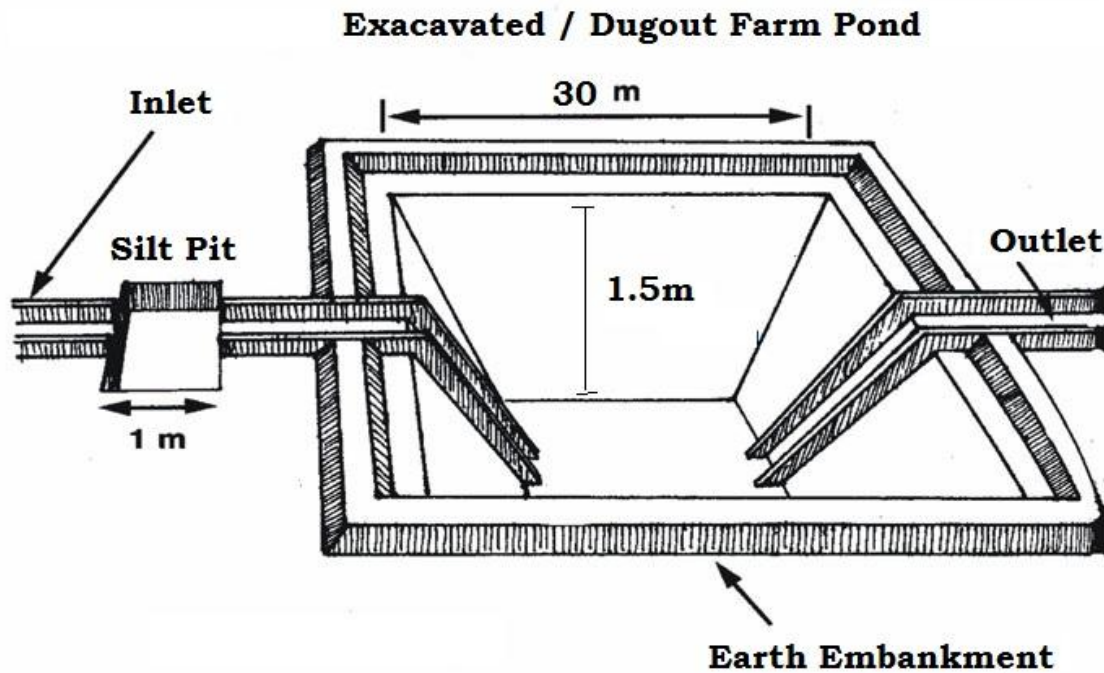

5.3.2.2. Micro Irrigation System (Sprinkler/ drip/ HDPE pipes)

Micro irrigation is defined as the frequent application of small quantities of water directly above and below the soil surface; usually as discrete drops, continuous drops or tiny streams through emitters placed along a water delivery line.

In flood/furrow irrigation method more than 50% of applied water is wasted through seepage to deeper level, localized inundation causes loss through evaporation and it leaches out the nutrients from the plant. While through drip & sprinkler irrigation wastage of irrigational water could be minimized. The studies on different crops, has revealed that irrigation water is saved drastically. The conveyance losses (mainly seepage & evaporation) can be saved up to 25 to 40% through utilization of HDPE pipes. Initially the scheme is proposed to be implemented in worst affected areas showing deepest water levels and significant declining trends. So with micro irrigation system the irrigation draft can be minimised by 50% and an amount of 325000 cum water can be saved for 100 ha of dry crop area.

It is proposed to take up micro irrigation system in 100 ha. The cost estimation for this component has been taken from SOR of Agricultural Engineering Department (AED), Govt. of Tamil Nadu. Tentative locations of proposed micro irrigation are shown in Plate 1.

6. Tentative Cost Estimation

A tentative number of feasible structures, its cost and expected annual groundwater recharge / water saving is given in the table 7. The unit rates are as followed by the PWD, Govt. of Tamil Nadu (Sources : Schedule of rates, Govt. of Tamil Nadu 2015).

Table 7. Showing the Cost Estimation of proposed Artificial Recharge Structures

Feasible Artificial Recharge & Water Conservation structures/ activities	Tentative Design	quantity (in nos. or area in sq. m)	Total volume (cu.m)	Tentative unit cost (in Rs lakh)	Total tentative cost (in Rs lakh)	Expected Annual GW recharge/saving (cu.m)
Recharge Structures/ Activities						
Masonry Check dams (5 Fillings)	Crest- 10 -15 m; Height- 1 m to 1.5 m	7	119000	9	63	95200
Nala bunds/ Gabion (4 Fillings)	Width: 5 to 15 m	31	93000	2.0	62	74400
Revival, repair of water bodies (3 fillings)	(~100mx100mx2.5m)	4	300000	12	48	240000
Recharge shaft with the pond /tanks	Recharge shaft of 1.5m dia with 2m depth with filter media in lower 1m, Bore dia 10" Casing 6" Depth 30m	4		2	8	
Water Conservation Activities						
Farm Pond (in ha) (5 filling)	(30 m x 30m x 1.5 m)	100 unit	600000	1	100	510000
Sprinkler/ drip/ HDPE pipes	For 1 ha with 5 m interval HDPE pipe	100 ha	1000000	0.6	60	700000
Sub total					341	1619600
Impact assessment and O & M						
Piezometers Up to 50 m bgl – 3 nos. @ 0.6 lakh					1.8	
Total cost of the project					342.8	
O & M - 5 % of total cost of the scheme					17.14	
Impact assessment to be carried out by the implementing agencies @5% of total cost					17.14	
GRAND TOTAL					377.08	

Note: The type, number and cost of structure may vary according to site, after the ground truth verification

7. Implication modalities

The implementation of the scheme will be done by the line department of the state selected by the respective State authority. Further, it is to add that more than 50 % MGNREGA works related to water conservation/sustainable management, accordingly a convergence guideline has been made between National Rural Employment Guarantee Act (NREGA) (Ministry of Rural Development) & Programmes of Water Resources (MoWR , RD & GR). The district Dindigul is one among the list of districts identified for Convergence between NREGS and schemes of MoWR. The details of permissible works under convergence are envisaged in the Joint Convergence Guideline.

a.) Time schedule

Steps	1 st Quarter	2 th Quarter	3 rd Quarter	4 th Quarter	5 th Quarter	6 th Quarter	7 th Quarter	8 th Quarter
❖ Identification of line department /implementing agency and preparation of DPR								
❖ Approval of scheme and release of sanction of funds								
❖ Implementation of ARS								

Phase = one quarter or 3 months or equivalent to financial quarter

b.) Operation and maintenance

In all projects Impact assessment has to be carried out to ensure that projects is economically viable, socially equitable and environmentally sustainable by inter-related socio-economic, cultural and human-health impacts, both beneficial and adverse. Accordingly it is proposed to have impact assessment at the rate of 5 % of the total cost of the project for 5 years from the completion of artificial recharge.

Prepared under Supervision of

Shri. A. Subburaj, Head of Office, CGWB, SECR, Chennai

Nodal Officer

Dr.S.Subramanian, Senior Hydrogeologist, CGWB, SECR, Chennai

Program – Core Working Committee

Shri. A. Ravi, Sr.Hg (Scientist- D, CGWB, SECR, Chennai

Dr. S. Subramanian, Sr.Hg (Scientist- D, CGWB, SECR, Chennai

Ms. D. Dhayamalar, Sr.Hg (Scientist- D, CGWB, SECR, Chennai

Dr.B. Umapathi, Sr.Hg (Scientist- D, CGWB, SECR, Chennai

Shri. R. Arumugam , Scientist D, CGWB, SECR, Chennai

Compiled by

Dr.S.Subramanian, Senior Hydrogeologist, CGWB, SECR, Chennai

जीविका, समृद्धि एवं खुशहाली के लिए जल संवर्धन करें

CONSERVE WATER FOR SUSTENANCE, PROSPERITY AND HAPPINESS

विस्तृत जानकारी के लिए संपर्क करें:-

क्षेत्रीय निदेशक

केन्द्रीय भूमि जल बोर्ड

दक्षिणपूर्वी तटीय क्षेत्र

ई-1, सी-ब्लॉक, राजाजी भवन

बेसंतनगर

Contact for further details

The Regional Director

Central Ground Water Board

South Eastern Coastal Region

E1, C Block, Rajaji Bhawan

Besant Nagar

Chennai –600090