

केंद्रीय भूमि जल बोर्ड

जल संसाधन, नदी विकास और गंगा संरक्षण विभाग, जल शक्ति मंत्रालय

भारत सरकार Central Ground Water Board

Department of Water Resources, River Development and Ganga Rejuvenation, Ministry of Jal Shakti Government of India

AQUIFER MAPPING AND MANAGEMENT OF GROUND WATER RESOURCES JASHPUR BLOCK, JASHPUR DISTRICT, CHHATTISGARH

उत्तर मध्य छत्तीसगढ़ क्षेत्र, रायपुर North Central Chhattisgarh Region, Raipur भारत सरकार

Government of India जल शक्ति मंत्रालय, जल संसाधन, नदी विकास एवं गंगा संरक्षण बिभाग Ministry of Jal Shakti, Department of Water Resources, River Development & Ganga Rejuvenation केन्द्रीय भूमि जल बोर्ड Central Groundwater Board



जशपुर बिकाशखंड, जशपुर जिला, छत्तीसगढ़ के जलभृत नक्शे एवं भूजल प्रबंधन योजना

Aquifer Maps and Ground Water Management Plan of Jashpur Block, Jashpur District, Chhattisgarh

केन्द्रीय भूमि जल बोर्ड

उत्तर मध्य छत्तीसगढ़ क्षेत्र द्वितीय तल, एल. के. कॉरपोरेट एवं लांजिस्तिक पार्क, धमतरी रोड, डूमरतराई, रायपुर (छत्तीसगढ़)-492015 फोन-0771-2974405, फैक्स-2974405, <u>ईमैल-rdnccr-cgwb@nic.in</u>

ACKNOWLEDGEMENT

The author is grateful to Shri G. C. Pati, Chairman, Central Ground Water Board for giving opportunity for preparation of the National Aquifer Mapping & Management report of Pathalgaon block, Jashpur district, Chhattisgarh. I express my sincere gratitude to Shri G. L. Meena, Member (WQ & WTT) & Shri. Utpal Gogoi Member (Scientist), CGWB for giving valuable guidance, encouragement and suggestions during the preparation of this report. The author is thankful to Shri A. K. Biswal, Head of the Office, Central Ground Water Board, NCCR, Raipur extending valuable guidance and constant encouragement during the preparation of this report. The author is also thankful to Sh. A. K. Patre, Sc.D; Sh. Uddeshya Kumar, Sc-B & Sh. R. K. Dewangan, Sc-B and other officers and officials of all the sections of the office for the help rendered & for providing the needful data during the preparation of this report on "AQUIFER MAPPING & MANAGEMENT PLAN IN DULDULA BLOCK, JASHPUR DISTRICT, CHHATTISGARH".

AQUIFER MAPS AND GROUND WATER MANAGEMENT PLAN, JASHPUR BLOCK, JASHPUR DISTRICT, CHHATTISGARH

CONTRIBUTORS'

Principal Author

Sidhanta Kumar Sahu : Junior Hydrogeologist / Scientist-B

Supervision & Guidance

Shri A. K. Biswal : Regional Director (I/C)

A. K. Patre : Senior Hydrogeologist/ Scientist-D

(OIC NAQUIM)

AQUIFER MAPPING AND MANAGEMENT PLAN FOR JASHPUR BLOCK (JASHPUR DISTRICT), CHHATTISGARH

CONTENTS

1. Salient Information:	1
1.1 About the area:	1
1.2 Population:	1
1.3 Growth rate:	1
1.4 Rainfall:	1
1.5 Agriculture and Irrigation	5
1.6 Groundwater Resource Availability and Extraction	6
1.7 Existing and Future Water Demand (2025):	7
1.8 Water Level Behavior:	7
2. Aquifer Disposition:	15
2.1 Number of Aquifers	15
2.2 Aquifer wise Characteristics:	16
3. Ground water Resource, extraction, contamination and other issues:	19
3.1 Aquifer wise resource availability and extraction:	19
3.2 Categorisation:	19
3.3 Chemical Quality of Ground water and Contamination:	19
4. Ground Water Resource enhancement:	19
4.1 Aquifer wise space available for recharge and proposed interventions:	19
5. Issues:	19
6. Management Plan:	20
7 Conducion	99

List of Tables

Table 1 Population Break Up	1
Table 2 Rainfall data in Jashpur block in mm	1
Table 3 Land use and Agricultural pattern (in ha)	5
Table 4 Cropping pattern (in ha)	5
Table 5 Area irrigated by various sources (in ha)	5
Table 6 Statistics showing Irrigation by Ground water	5
Table 7 Ground Water Budget of Jashpur block in Ham	6
Table 8 Ground Water Dynamic Resource (Unconfined Aquifer) of Jashpur block in Ham	6
Table 9 Ground Water Static Resource (Unconfined Aquifer) and Dynamic Resource (Confined Aquifer) of Jashpur block in Ham	6
Table 10 Total Resourses in Jashpur Block (in MCM)	7
Table 11 Phreatic aquifer Depth to Water Level in mbgl (Pre-monsoon)	7
Table 12 Semiconfined Aquifer Depth to Water Level in mbgl (Pre-monsoon)	7
Table 13 Phreatic Aquifer Depth to Water Level in mbgl (Post-monsoon)	8
Table 14 Semiconfined Aquifer Depth to Water Level in mbgl (Post-monsoon)	8
Table 15 Phreatic Aquifer Depth to Water Level Fluctuation in mbgl	8
Table 16 Semiconfined Aquifer Depth to Water Level Fluctuation in mbgl	8
Table 17 Aquifer Characteristics of Jashpur block	16
Table 18 Categorization of Assessment Unit	19
Table 19 Summarised detail of Volume of porous space available for recharge	19
Table 20 Types of Artificial Recharge structures feasible	20
Table 21 Potential of Additional GW abstraction structure creation	22
Table 99 Detail of groundwater saved through change in cropping pattern and other interventions	29

List of Figure

Figure 1 Administrative Map of the Block	2
Figure 2 Geomorphological Map of the Block	3
Figure 3 Drainage Map of the Block	4
Figure 4 Pre-monsoon depth to waterlevel of Phreatic Aquifer	9
Figure 5 Post-monsoon depth to waterlevel of Phreatic Aquifer	10
Figure 6 Seasonal waterlevel fluctuation of Phreatic Aquifer	11
Figure 7 Pre-monsoon depth to waterlevel of Confined/Semiconfined Aquifer	12
Figure 8 Post-monsoon depth to waterlevel of Confined/Semiconfined Aquifer	13
Figure 9 Seasonal waterlevel fluctuation of Confined/Semiconfined Aquifer	14
Figure 10 Hydrograph of Jashpurnagar, Jashpur block	15
Figure 11 Hydrograph of Rupsera village, Jashpur block	15
Figure 12 Aquifer map of Jashpur block	17
Figure 13 Cross-section and Fence diagram of Jashpur block	18
Figure 14 Location of proposed Artificial Recharge Structure	21

JASHPUR BLOCK

1. SALIENT INFORMATION:

- **1.1 About the area:** Jashpur Block is situated on the North eastern part of Jashpur district of Chhattisgarh and is bounded on the north and west by Jharkhand State, in the south by Duldula Block and in the east by Manora and Kunkuri Block. The block area lies between 22.772 and 23.034 N latitudes and 84.032 and 84.401 E longitudes. The geographical extension of the study area is 589.6 sq. km representing around 9 % of the district's geographical area. Administrative map of the block is shown in Figure 1. The major part of the block is comprises of high level plateaus with lateritic cover. Geomorphological map is shown in Figure 2. The major drainage of the block includes Girma, Banki, Lawa Nala and Sankh river, which are parts of Lower Ganga basin. Drainage map shown in Figure 3.
- **1.2 Population:** The total population of Jashpur block as per 2011 Census is 96360 out of which rural population is 68059 while urban population is 28301. The population break up i.e. male- female, rural & urban is given below -

Table 1 Population Break Up

Block	Total	Male	Female	Rural	Urban
	population			population	population
Jashpur	96360	48449	47911	68059	28301

Source: CG Census, 2011

- **1.3 Growth rate:** The decadal growth rate of the block is 18.6 as per 2011 census.
- **1.4 Rainfall:** The study area receives rainfall mainly from south-west monsoon. About 87% of the annual rainfall is received during June to September and July and August are the months of maximum precipitation. The area gets some rainfall during winter season also. Average annual rainfall in the study area is (Average of the last five years i.e. 2013 to 2017) 1013.2 mm with 70 to 80 rainy days.

Table 2 Rainfall data in Jashpur block in mm

Year	2013	2014	2015	2016	2017
Annual rainfall	811	1042	962	1328	923

Source: IMD

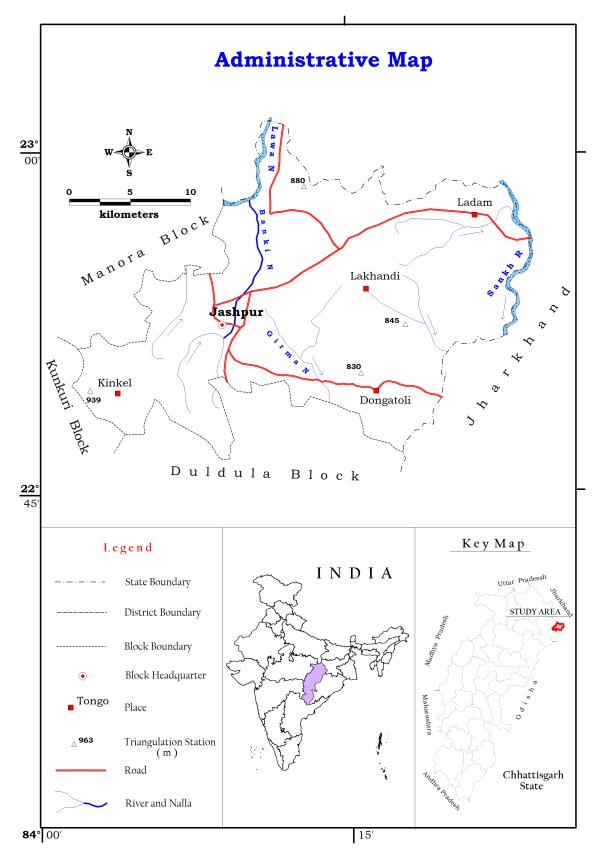


Figure 1 Administrative Map of the Block

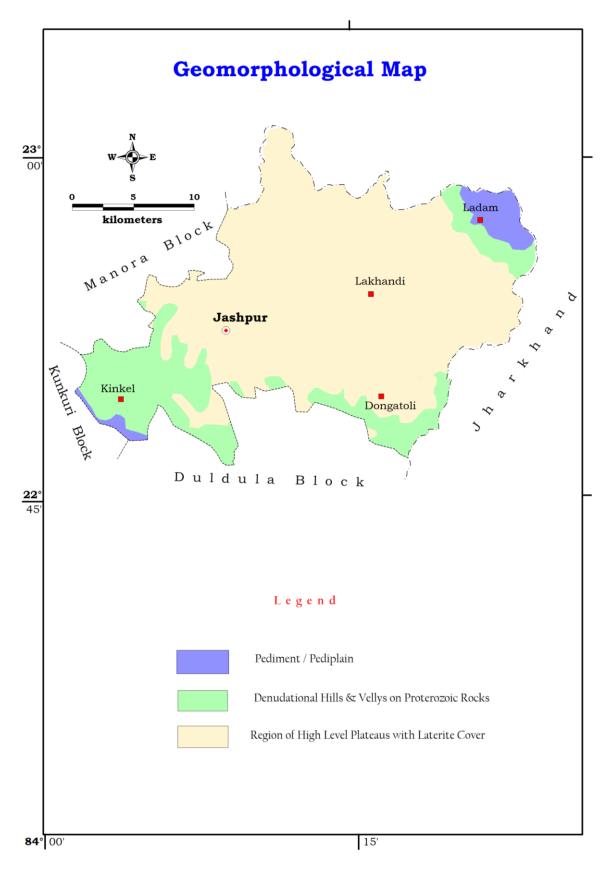


Figure 2 Geomorphological Map of the Block

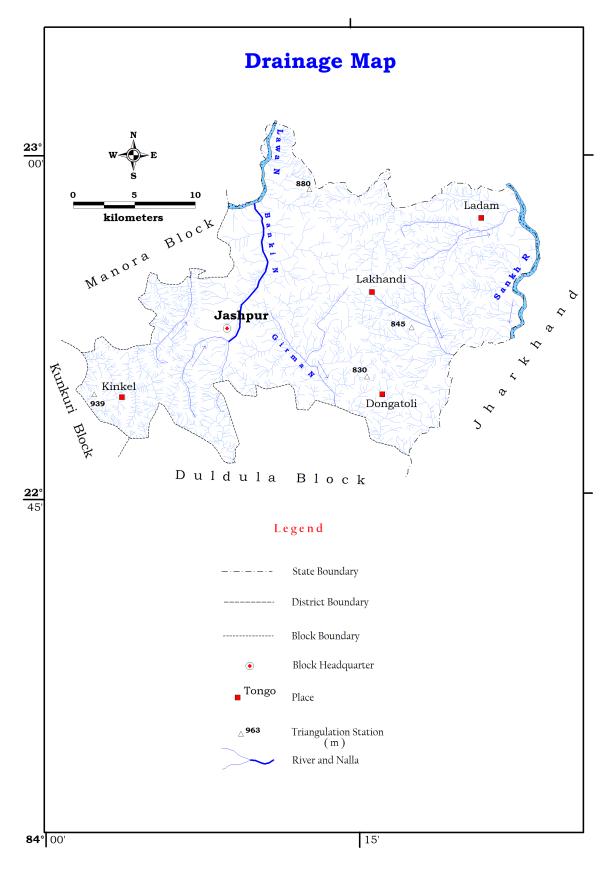


Figure 3 Drainage Map of the Block

1.5 Agriculture and Irrigation: Agriculture is practiced in the area during Kharif and Rabi season every year. During the Kharif, cultivation is done through rainfall while during the Rabi season; it is done through ground water as well as partly through surface water like canals and other sources. The groundwater abstraction structures are generally Dugwells, Borewells /tubewells. The principal crops in the block are Paddy, Wheat, Vegetables and pulses. In some areas, double cropping is also practiced. The agricultural pattern, cropping pattern and area irrigated data of Jashpur block is given in Table 3, 4, 5 & 6

Table 3 Land use and Agricultural pattern (in ha)

Total geographical area	Revenue forest area	Area not available for cultivation	Non- agricultural & Fallow land	Agricultural Fallow land	Net sown area	Double cropped area	Gross cropped area
48051	2975	9890	2660	2384	23112	376	23498

Table 4 Cropping pattern (in ha)

Vharif	Dahi	Cereal bi					Tilhan	Fruits and	Mirch	Sugarcano
Kharif	Rabi	Paddy	Wheat	Jowar & Maize	Others	Pulses	Timan	Vegetables	egetables Masala Sugarcane	
22845	653	17574	37	144	164	2030	2822	554	58	2

 Table 5 Area irrigated by various sources (in ha)

No. of canals (private and Govt.)	Irrigated area	No. of bore wells/ Tube wells	Irrigated area	No. of dug wells	Irrigated area	No. of Ponds	Irrigated area	Irrigated area by other sources	Net Irrigated area	Gross irrigated area	% of irrigated area wrt. Net sown area
6	3	26	8	2169	115	34	00	199	325	330	1.43

Table 6 Statistics showing Irrigation by Ground water

Net Irrigated Area	Net Irrigated Area by ground water	Percentage of Area Irrigated by ground water
325	123	38

1.6 Groundwater Resource Availability and Extraction: Based on the resource assessment made, the resource availability in aquifer wise in Jashpur block is given in the table-4.

Table 7 Ground Water Budget of Jashpur block in Ham

Gr	ound Water Re				
Monsooi	n Season	Total Annual Ground Water	Total Natural		
Recharge from Rainfall	Recharge from Other Sources	Recharge from Rainfall	Recharge from Other Sources	(Ham) Recharge	Discharges (Ham)
2686.01	105.95	485.31	422.98	3700.25	186.72

Table 8 Ground Water Dynamic Resource (Unconfined Aquifer) of Jashpur block in Ham

Annual Extractab	Current Ann	ual Ground	Water Extract	tion (Ham)	Annual GW	Net Ground	Stage of Ground	Categori zation
le Ground Water Recharge (Ham)	Irrigation Use	Domesti c Use	Industrial Use	Total Extraction	Allocation Water for Availabi Domestic y for	Water Availabilit	Water Extraction (%)	(OE/Cri tical/Se micritic al/Safe)
3513.53	1717.75	246.06	0.00	1963.81	279.01	1516.77	55.89	Safe

Table 9 Ground Water Static Resource (Unconfined Aquifer) and Dynamic Resource (Confined Aquifer) of Jashpur block in Ham

Static	Difference	Storativity	Dynamic Ground	Bottom	In storage	Sum of
Resources	Piezometric	(S)	Water Resource of	level of the	Ground	Dynamic
Area (Ha)	Head (Pre-		Confined Aquifer	top	Water	GW
	post) m		(Ham)	confining	Resource	(Confined
				layer (m)	of	Aquifer)
					Unconfined	and In
					Aquifer	storage GW
					(Ham)	(Unconfined
						Aquifer)
						resource
						(Ham)
58986	4.608	0.00025	66.86	200.00	2719.89	2786.75

Table 10 Total Resourses in Jashpur Block (in MCM)

Block	Dynamic Resources (MCM)		Insitu Resources (MCM)		Total Resources (MCM)
	Aquifer I	Aquifer II	Aquifer I	Aquifer II	
Jashpur	35.14	0.67	27.2	110.33	173.34

1.7 Existing and Future Water Demand (2025): The existing draft for irrigation in the area is 1717.75 Ham while the total extraction for all uses is 1963.81 Ham. At present scenario to meet the future demand for water, a total quantity of 1516.77 ham of ground water is available for future use.

1.8 Water Level Behaviour:

(i) <u>Pre-monsoon water level</u>: In the pre-monsoon period, it has been observed that in Jashpur block, water level in dugwells (phreatic aquifer) varies between 4.55 to 11.10 mbgl with average water level of 7.49 mbgl. Water level in semi confined aquifer, varies between 6.28 to 26.38 mbgl with average water level is 12.14 mbgl.

 Table 11 Phreatic aquifer Depth to Water Level in mbgl (Pre-monsoon)

Block Name	Phreatic Aquifer			
BIOCK IVAINE	Min	Max	Avg	
Jashpur	4.55	11.10	7.49	

Table 12 Semiconfined Aquifer Depth to Water Level in mbgl (Pre-monsoon)

Block Name	Semiconfined Aquifer				
Block Hume	Min	Max	Avg		
Jashpur	6.28	26.38	12.14		

(ii) <u>Post-monsoon water level</u>: In the post-monsoon period, it has been observed that the water level varies from 3.17 to 4.58 mbgl with an average of 3.87 mbgl in phreatic aquifer. In semiconfined/fractured formation, the post monsoon water level variation range is 4.2 to 9.8 mbgl with average of 7.3 mbgl.

 Table 13 Phreatic Aquifer Depth to Water Level in mbgl (Post-monsoon)

Block Name	Phreatic Aquifer			
Diock Name	Min	Max	Avg	
Jashpur	3.17	4.58	4.58	

Table 14 Semiconfined Aquifer Depth to Water Level in mbgl (Post-monsoon)

Block Name	Semiconfined Aquifer			
DIOCK IVAILLE	Min	Max	Avg	
Jashpur	4.2	9.8	7.3	

(iii) <u>Seasonal water level fluctuation:</u> The water level fluctuation data indicates that in Jashpur block, water level fluctuation in phreatic aquifer varies from 0.3 to 7.32 mbgl with an average fluctuation of 2.60 mbgl. Water level fluctuation in semiconfined Aquifer varies from 0.58 to 3.86 mbgl with an average fluctuation of 2.38 mbgl.

Table 15 Phreatic Aquifer Depth to Water Level Fluctuation in mbgl

Block	Phreatic Aquifer			
Name	Min	Max	Avg	
Jashpur	1.38	6.52	3.6	

Table 16 Semiconfined Aquifer Depth to Water Level Fluctuation in mbgl

Block	Semiconfined Aquifer			
Name	Min	Max	Avg	
Jashpur	0.58	3.86	2.38	

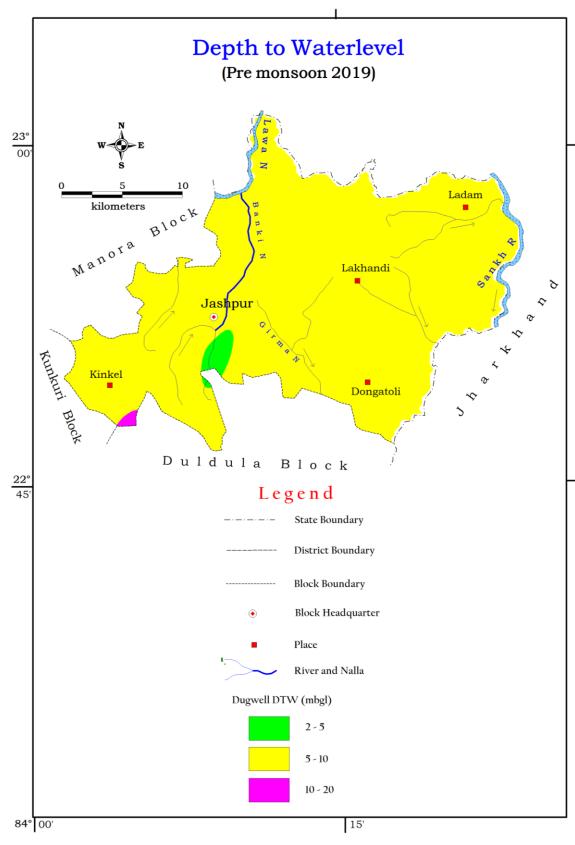


Figure 4 Pre-monsoon depth to waterlevel of Phreatic Aquifer

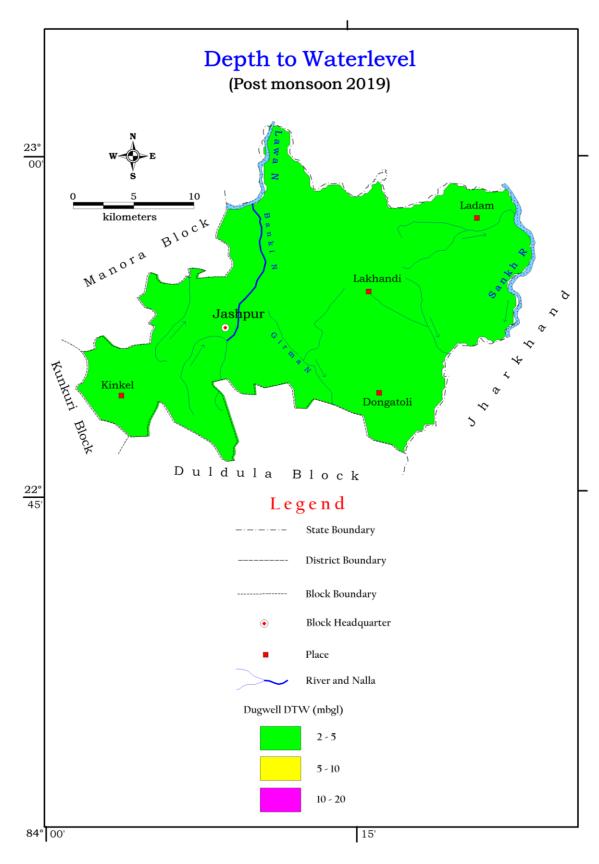


Figure 5 Post-monsoon depth to waterlevel of Phreatic Aquifer

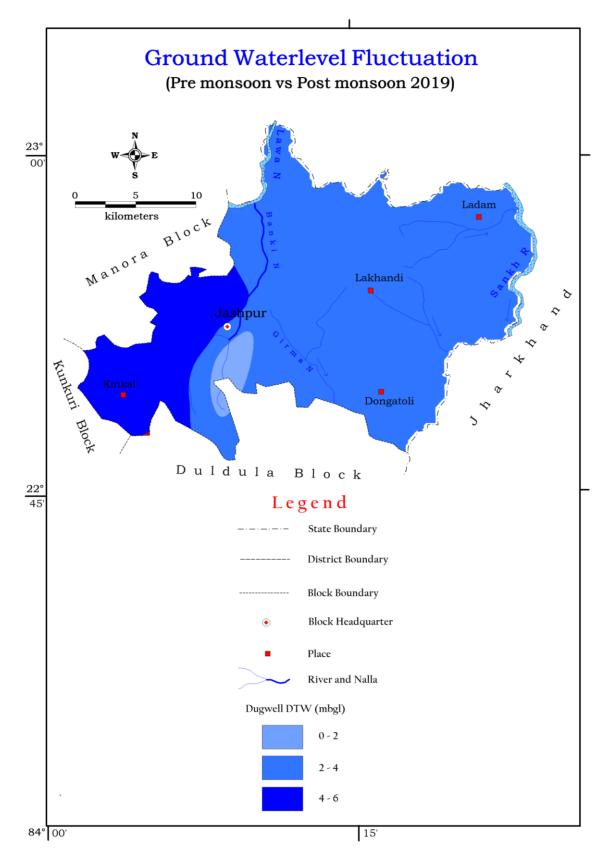


Figure 6 Seasonal waterlevel fluctuation of Phreatic Aquifer

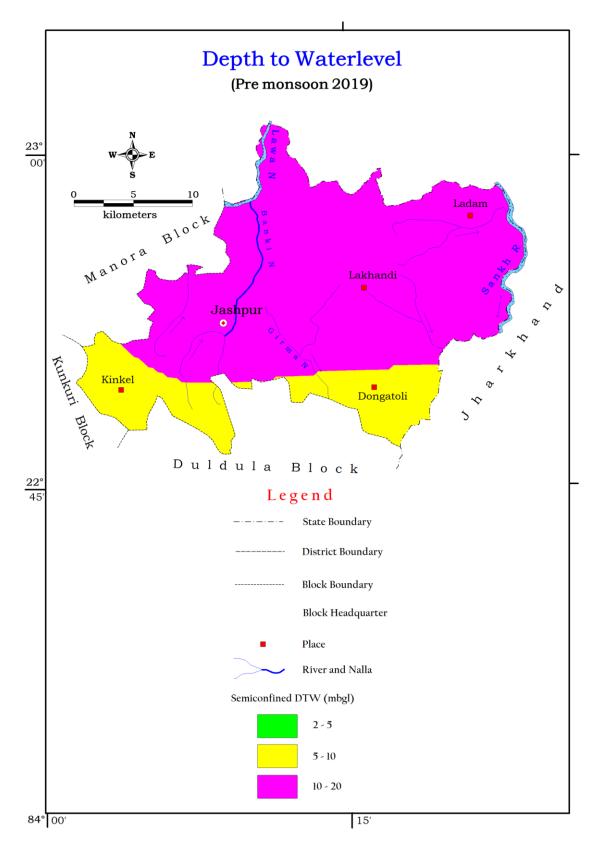


Figure 7 Pre-monsoon depth to waterlevel of Confined/Semiconfined Aquifer

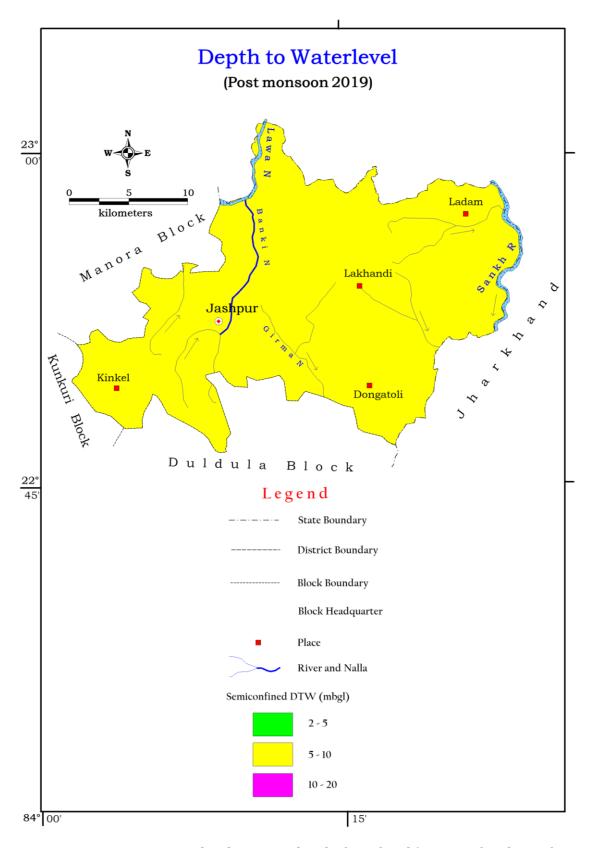


Figure 8 Post-monsoon depth to waterlevel of Confined/Semiconfined Aquifer

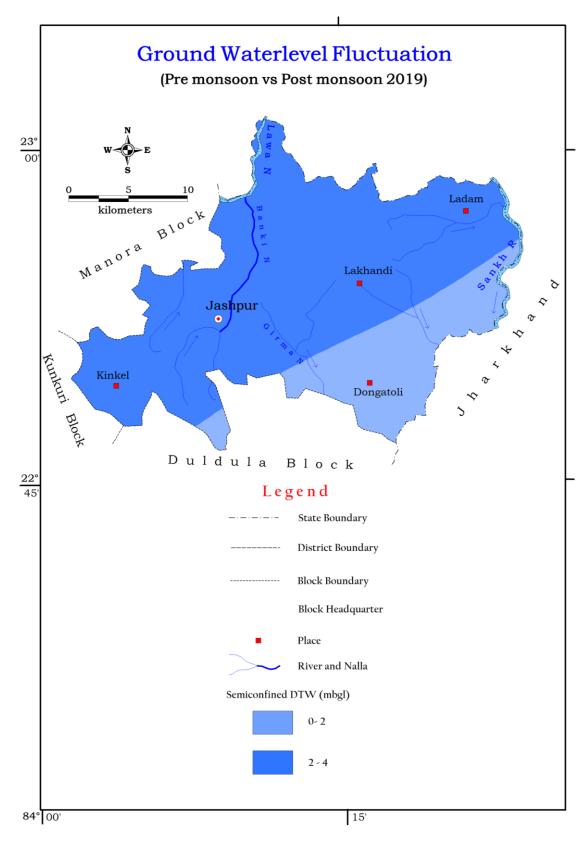


Figure 9 Seasonal waterlevel fluctuation of Confined/Semiconfined Aquifer

(iv) <u>The long-term water level trend</u>: There is no significant decline in water level in pre and post monsoon

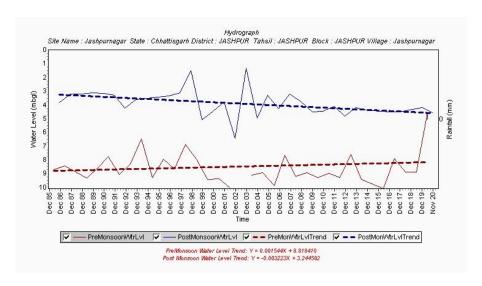


Figure 10 Hydrograph of Jashpurnagar, Jashpur block

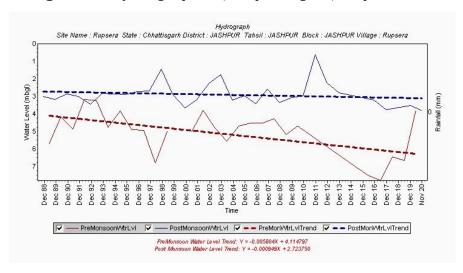


Figure 11 Hydrograph of Rupsera village, Jashpur block

2. AQUIFER DISPOSITION:

2.1 Number of Aquifers: There is only one major aquifer system viz. Granite Aquifer system. The aquifer system has the shallow aquifer and deeper aquifer which occurs in phreatic and semiconfined condition respectively.

Granite Aquifer System:

Groundwater occurrence is largely limited to secondary permeability, such as weathered zones, joints, fractures or faults. The potential of weathered zones depends on the degree and depth of weathering and associated fracturing, and the saturated thickness. The aquifers are

generally discontinuous, and often confined. Higher yields are obtained where thick weathered zones are associated with bedrock fracturing. DTH drilling technique is preferred in Granite aquifer where well construction is required depending upon the thickness of weathered zone.

2.2 Aquifer wise Characteristics:

Table 17 Aquifer Characteristics of Jashpur block

CHARACTERISTICS	AQUIFER SYSTEM			
	Fractured Granite	Weathered Granite		
Major Geological Formation	Chotanagpur Granite Geneiss	Chotanagpur Granite Geneiss.		
Major Rock type	Granite Geneiss	Granite Geneiss		
Avg Weathered Thickness (m)	-	12.5		
Transmissivity (m²/day)	1 to 75	5 to 28		
Average Drawdown (m)	20	28		
Discharge	Negligible to 3 lps	10 to 110 m3/day		
No. of Potential Zone	1 to 2set: 50m to 100m 1 set: 100m to 200m (Most potential zone- 50 to 100m)	-		

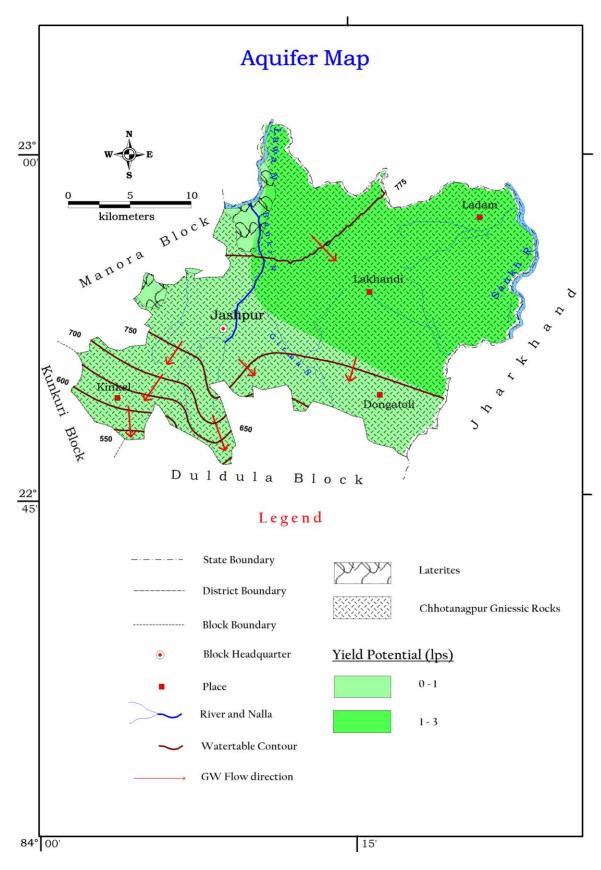
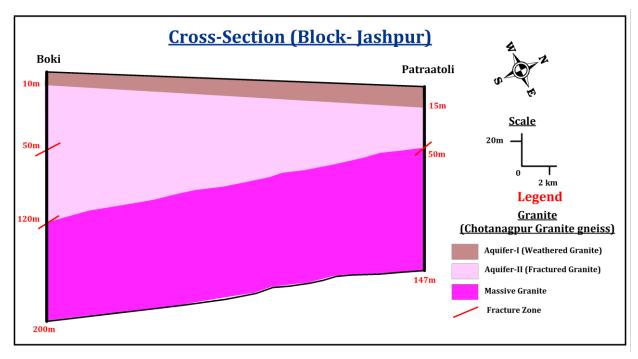


Figure 12 Aquifer map of Jashpur block



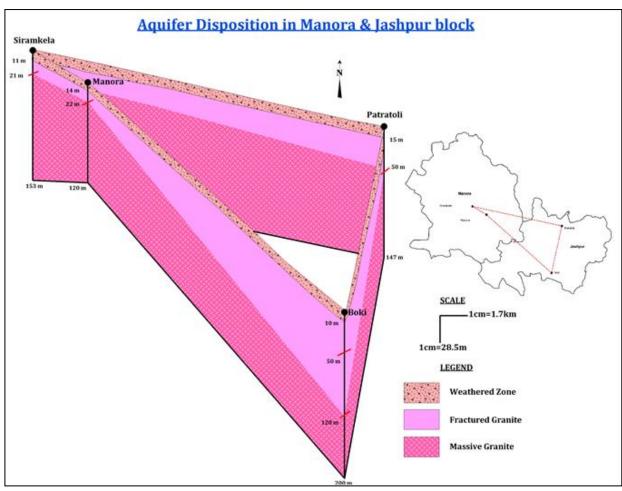


Figure 13 Cross-section and Fence diagram of Jashpur block

3. GROUND WATER RESOURCE, EXTRACTION, CONTAMINATION AND OTHER ISSUES:

3.1 Aquifer wise resource availability and extraction: Resource availability of Jashpur block is given in the Table 8 where net ground water availability for future use is 1516.77 ham. The extraction details and the future scenario (2025) along with the categorisation are also depicted in the Table 8.

Table 18 Categorization of Assessment Unit

District	Block	Stage of Ground water development (%)	Categorisation
Jashpur	Jashpur	55.89	Safe

- **3.2 Categorisation:** Jashpur block falls in safe category. The stage of Ground water development is 55.89 %. The Ground water draft for all uses is 1963.81 Ham. The Net Ground water availability is 1516.77 ham.
- **3.3 Chemical Quality of Ground water and Contamination:** Throughout the study area, the water samples from both dugwell and handpumps were collected and chemical analysis has been completed. In the Village named Lamdund have more NO₃ concentration. Overall ground water of the study area is suitable for the drinking, agriculture and industrial purpose.

4. GROUND WATER RESOURCE ENHANCEMENT:

4.1 Aquifer wise space available for recharge and proposed interventions:

Table 19 Summarised detail of Volume of porous space available for recharge

Major Aquifer	Area Identified for Artificial Recharge (Sq. Km)	Sp. Yield for the formation	Volume of vadose zone available for recharge(mcm)	Sub surface storage potential (mcm)
Granite	126.27	0.008	190	2.091

5. ISSUES:

(i) During summer, dugwells in villages becomes dry at many locations. Several handpumps also stop yielding water. The aquifer itself is a low yielding one.

- (ii) In Granite aquifer system potential zone for ground water is related with occurrence of fracture, so drilling a high yield well is always a challenge. Proper scientific study coupled with geophysical investigation may minimize the failure of well.
- (iii) High value of Fluoride and Iron has been reported from several locations.

6. MANAGEMENT PLAN:

- (i) It has been observed during fieldwork, there is colossal wastage of groundwater through private well and public water supply system. So, Information, Education and Communication (IEC) activities need to be organized to sensitize people on the issues of depleting groundwater resource. Massive awareness campaigns are essential to aware people about the importance of community participation in saving water.
- (ii) Desiltation of existing Tanks and Talabs to be carried out for efficient storage of rainwater. Also Rain water harvesting structures may be constructed in villages to reduce stress on groundwater.
- (iii) It has been observed that the demand of ground water is increasing for irrigation, industrial and domestic uses. At locations where water level is declining, we have to go for artificial recharge on a long-term sustainability basis. Artificial Recharge structures may be constructed at suitable locations especially in the areas where the water level remains more than 3m in the post-monsoon period in this block to arrest the huge non-committed run-off and augment the ground water storage in the area. The different types of artificial structures feasible in the block are described in Table 20

Table 20 Types of Artificial Recharge structures feasible

	Area Feasible		Types of Structures Feasible and their Numbers			
Block	for recharge (sq.km)	Surface Potential for Artificial recharge (MCM)	Percolation tank	Nalas bunding cement plug/ check dam	Gravity head /Dug well/ tube well/Recharge shaft	Gully plugs Gabion structures
Jashpur	126.27	2.091	5	15	37	28
	Recharge Capacity (MCM)/structure		0.4182	0.1394	0.0565	0.0746

- (iv) Fluoride and Iron filter plant may be installed in the villages having higher value of contaminants.
- (v) In urban areas STP may be installed for the treatment of sewage water in proper numbers to avoid contamination of ground water. Treatment of sewage water in village

through soak pit for the individual houses and Seechewal model or similar model for community level may be adopted to avoid contamination of ground water. Treated water may also be reused for irrigation and other industrial purposes.

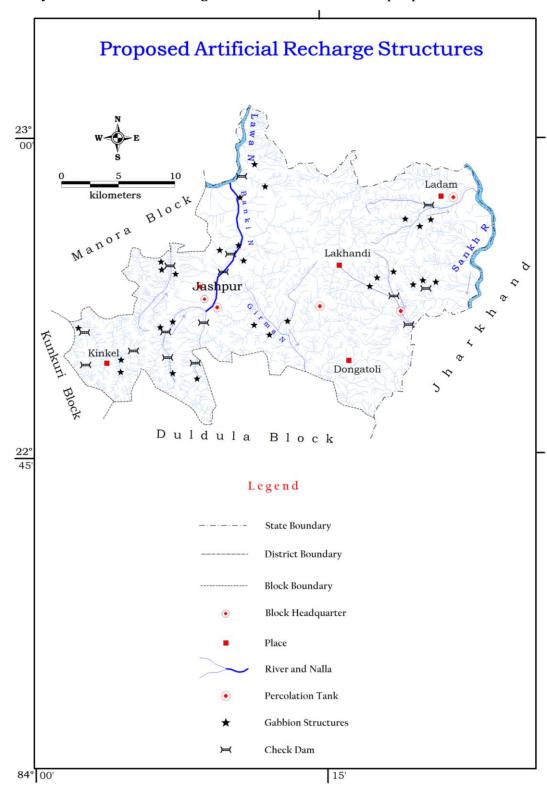


Figure 14 Location of proposed Artificial Recharge Structure

(vi) Since the stage of development in the block is 20.60 %. There is scope of utilizing more ground water for future irrigation purpose. Additional number of Ground water abstraction structure may be developed for the effective utilization of ground water resources in the block. The ground water is presently developed through dug wells and tube wells. Yield potential for the block has been shown in Aquifer map (Figure 12). Sites for wells need to be selected only after proper scientific investigation. The ground water quality also needs to be ascertained and the wells used for water supply should be first checked for Iron, Fluoride and other pollutants.

 Table 21 Potential of Additional GW abstraction structure creation

Net GW	Stage of GW	Present	GW draft	Surplus GW at	Number of TW	Number of DW
availability	Development	GW draft	at 70%	present Stage	Recommended in	Recommended in
(ham)	(%)	(Ham)	stage of	of	each block (Assuming	each block
			developm	Development	unit draft as 1.6	(Assuming unit draft
			ent (ham)	(ham)	ham/structure/year)	as 0.72
						ham/structure/year)
3513.55	55.89	1963.81	2459.47	495.66	186	275

7. CONCLUSION:

For effective utilization of Ground water existing draft for irrigation may be coupled with micro irrigation system. Change in irrigation pattern, optimum use of available resource, use of ground water potential created after artificial recharge can lead to groundwater savings and increase in gross cropped area of the block (Table: 22).

Table 22 Detail of groundwater saved through change in cropping pattern and other interventions

Block	Existing	Additional	GW	Development	Additional	Additional	Percent
	Gross	Saving of	Potential	by new GW	GW	Irrigation	increase
	Ground	GW after	created	abstraction	irrigation	potential	in Crop
	Water	using	after	structure	Potential	creation for	area
	Draft for	Micro	Artificial		created in	Maize/	compare
	Irrigation	Irrigation	recharge		Ham	wheat in	to Gross
	in Ham	methods	structure			winter	cropped
		in Ham	in Ham			season in Ha	area
		(Assuming				(Assuming	
		30 %				500 mm	
		saving)				water	
						requirement)	
Jashpur	1717.75	515.33	209.13	495.66	1220.12	2440.23	10.38%