



केंद्रीय भूमि जल बोर्ड
जल संसाधन, नदी विकास और गंगा संरक्षण
विभाग, जल शक्ति मंत्रालय

भारत सरकार
Central Ground Water Board
Department of Water Resources, River
Development and Ganga Rejuvenation,
Ministry of Jal Shakti
Government of India

**AQUIFER MAPPING AND MANAGEMENT
OF GROUND WATER RESOURCES
PATHALGAON BLOCK, JASHPUR DISTRICT,
CHHATTISGARH**

उत्तर मध्य छत्तीसगढ़ क्षेत्र, रायपुर
North Central Chhattisgarh Region, Raipur

2020

भारत सरकार

Government of India

जल शक्ति मंत्रालय, जल संसाधन, नदी विकास एवं गंगा संरक्षण विभाग

Ministry of Jal Shakti, Department of Water Resources,
River Development & Ganga Rejuvenation

केन्द्रीय भूमि जल बोर्ड

Central Groundwater Board



पथालगाँव बिकाशखंड, जशपुर जिला, छत्तीसगढ़ के जलभृत नक्शे एवं भूजल प्रबंधन योजना

Aquifer Maps and Ground Water Management Plan of Pathalgaon Block, Jashpur District, Chhattisgarh

केन्द्रीय भूमि जल बोर्ड

उत्तर मध्य छत्तीसगढ़ क्षेत्र

द्वितीय तल, एल. के. कॉरपोरेट एवं लांजिस्तिक पार्क,

धमतरी रोड, डूमरतराई, रायपुर (छत्तीसगढ़)-492015

फोन-0771-2974405, फैक्स-2974405, ईमेल-rdnccr-cgwb@nic.in

रायपुर

ACKNOWLEDGEMENT

The author is grateful to Shri G. C. Pati, Chairman, Central Ground Water Board for giving opportunity for preparation of the National Aquifer Mapping & Management report of Pathalgaon block, Jashpur district, Chhattisgarh. I express my sincere gratitude to Shri G. L. Meena, Member (WQ & WTT) & Shri. Utpal Gogoi Member (Scientist), CGWB for giving valuable guidance, encouragement and suggestions during the preparation of this report. The author is thankful to Shri A. K. Biswal, Head of the Office, Central Ground Water Board, NCCR, Raipur extending valuable guidance and constant encouragement during the preparation of this report. The author is also thankful to Sh. A. K. Patre, Sc.D; Sh. Uddeshya Kumar, Sc-B & Sh. R. K. Dewangan, Sc-B and other officers and officials of all the sections of the office for the help rendered & for providing the needful data during the preparation of this report on "AQUIFER MAPPING & MANAGEMENT PLAN IN PATHALGAON BLOCK, JASHPUR DISTRICT, CHHATTISGARH".

**AQUIFER MAPS AND GROUND WATER MANAGEMENT PLAN,
PATHALGAON BLOCK, JASHPUR DISTRICT, CHHATTISGARH**

CONTRIBUTORS'

Principal Author

Sidhanta Kumar Sahu : Junior Hydrogeologist / Scientist-B

Supervision & Guidance

Shri A. K. Biswal : Regional Director (I/C)

A. K. Patre : Senior Hydrogeologist/ Scientist-D
(OIC NAQUIM)

AQUIFER MAPPING AND MANAGEMENT PLAN FOR PATHALGAON BLOCK (JASHPUR DISTRICT), CHHATTISGARH

CONTENTS

1. Salient Information:	1
1.1 About the area:	1
1.2 Population:.....	1
1.3 Growth rate:.....	1
1.4 Rainfall:	1
1.5 Agriculture and Irrigation.....	5
1.6 Groundwater Resource Availability and Extraction.....	6
1.7 Existing and Future Water Demand (2025):.....	7
1.8 Water Level Behavior:.....	7
2. Aquifer Disposition:	16
2.1 Number of Aquifers	16
2.2 Aquifer wise Characteristics:	16
3. Ground water Resource, extraction, contamination and other issues:	20
3.1 Aquifer wise resource availability and extraction:	20
3.2 Categorisation:	20
3.3 Chemical Quality of Ground water and Contamination:	20
4. Ground Water Resource enhancement:.....	20
4.1 Aquifer wise space available for recharge and proposed interventions:.....	20
5. Issues:	21
6. Management Plan:.....	21
7. Conclusion:.....	23

List of Tables

Table 1 Population Break Up	1
Table 2 Rainfall data in Pathalgaon block in mm.....	1
Table 3 Land use and Agricultural pattern (in ha).....	5
Table 4 Cropping pattern (in ha).....	5
Table 5 Area irrigated by various sources (in ha)	5
Table 6 Statistics showing Irrigation by Ground water	5
Table 7 Ground Water Budget of Pathalgaon block in Ham.....	6
Table 8 Ground Water Dynamic Resource (Unconfined Aquifer) of Pathalgaon block in Ham	6
Table 9 Ground Water Static Resource (Unconfined Aquifer) and Dynamic Resource (Confined Aquifer) of Pathalgaon block in Ham	6
Table 10 Total Resources in Pathalgaon Block (in MCM)	7
Table 11 Phreatic aquifer Depth to Water Level in mbgl (Pre-monsoon).....	7
Table 12 Semiconfined Aquifer Depth to Water Level in mbgl (Pre-monsoon)	7
Table 13 Phreatic Aquifer Depth to Water Level in mbgl (Post-monsoon)	8
Table 14 Semiconfined Aquifer Depth to Water Level in mbgl (Post-monsoon).....	8
Table 15 Phreatic Aquifer Depth to Water Level Fluctuation in mbgl.....	8
Table 16 Semiconfined Aquifer Depth to Water Level Fluctuation in mbgl.....	8
Table 17 Aquifer Characteristics of Pathalgaon block.....	16
Table 18 Categorization of Assessment Unit.....	20
Table 19 Summarised detail of Volume of porous space available for recharge	20
Table 20 Types of Artificial Recharge structures feasible	21
Table 21 Potential of Additional GW abstraction structure creation	23
Table 22 Detail of groundwater saved through change in cropping pattern and other interventions.....	23

List of Figure

Figure 1 Administrative Map of the Block.....	2
Figure 2 Geomorphological Map of the Block.....	3
Figure 3 Drainage Map of the Block.....	4
Figure 4 Pre-monsoon depth to waterlevel of Phreatic Aquifer.....	9
Figure 5 Post-monsoon depth to waterlevel of Phreatic Aquifer	10
Figure 6 Seasonal waterlevel fluctuation of Phreatic Aquifer	11
Figure 7 Pre-monsoon depth to waterlevel of Confined/Semiconfined Aquifer.....	12
Figure 8 Post-monsoon depth to waterlevel of Confined/Semiconfined Aquifer	13
Figure 9 Sesonal waterlevel fluctuation of Confined/Semiconfined Aquifer	14
Figure 10 Hydrograph of Bangaon village, Pathalgaon block	15
Figure 11 Hydrograph of Kotba village, Pathalgaon block.....	15
Figure 12 Hydrograph of Ludeg village, Pathalgaon block	15
Figure 13 Aquifer map of Pathalgaon block	17
Figure 14 2D Cross-Section of Pathalgaon block	18
Figure 15 Fence diagram of Pathalgaon block.....	19
Figure 16 Location of proposed Artificial Recharge Structure.....	22

PATHALGAON BLOCK

1. SALIENT INFORMATION:

1.1 About the area: Pathalgaon Block is situated on the southern part of Jashpur district of Chhattisgarh and is bounded on the north by Kansabel Block, in the west by Sarguja district, in the south by Raigarh district and in the east by Pharsabaha Block. The block area lies between 22.371 and 22.705 N latitudes and 83.368 and 83.804 E longitudes. The geographical extension of the study area is 792 sq. km representing around 12 % of the district's geographical area. Administrative map of the block is shown in Figure 1. The whole block is mainly comprises of pediment or pediplain on Chotanagpur granitic gneiss. Geomorphological map is shown in Figure 2. The major drainage of the block includes Burhi Nala and Kokiya Nala, which are parts of middle Mahanadi basin. Drainage map shown in Figure 3.

1.2 Population: The total population of Pathalgaon block as per 2011 Census is 191530 out of which rural population is 168112 while the urban population is 23418. The population break up i.e. male- female, rural & urban is given below -

Table 1 Population Break Up

Block	Total population	Male	Female	Rural population	Urban population
Pathalgaon	191530	95480	96050	168112	23418

Source: CG Census, 2011

1.3 Growth rate: The decadal growth rate of the block is 16.23 as per 2011 census.

1.4 Rainfall: The study area receives rainfall mainly from south-west monsoon. About 87% of the annual rainfall is received during June to September and July and August are the months of maximum precipitation. The area gets some rainfall during winter season also. Average annual rainfall in the study area is (Average of the last five years i.e. 2013 to 2017) 1148.6 mm with 70 to 80 rainy days.

Table 2 Rainfall data in Pathalgaon block in mm

Year	2013	2014	2015	2016	2017
Annual rainfall	963	908	779.1	1613	1480.2

Source: IMD

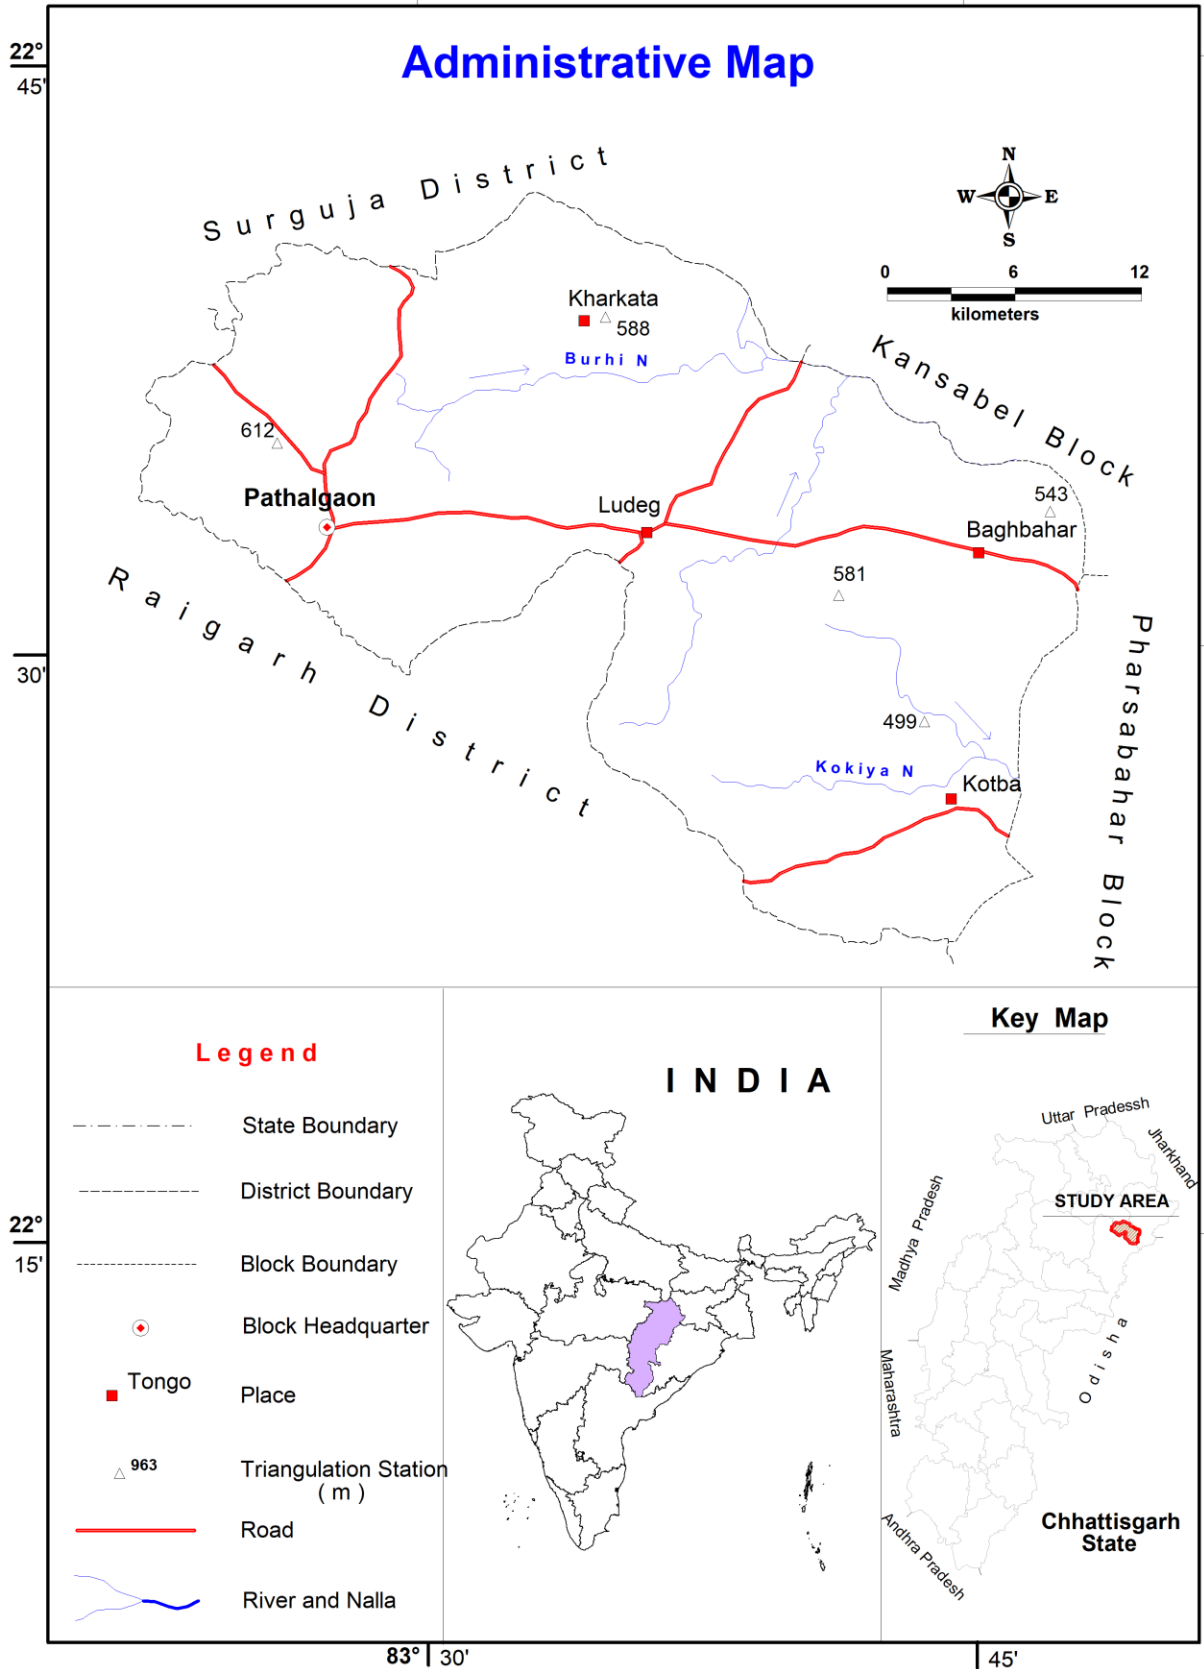


Figure 1 Administrative Map of the Block

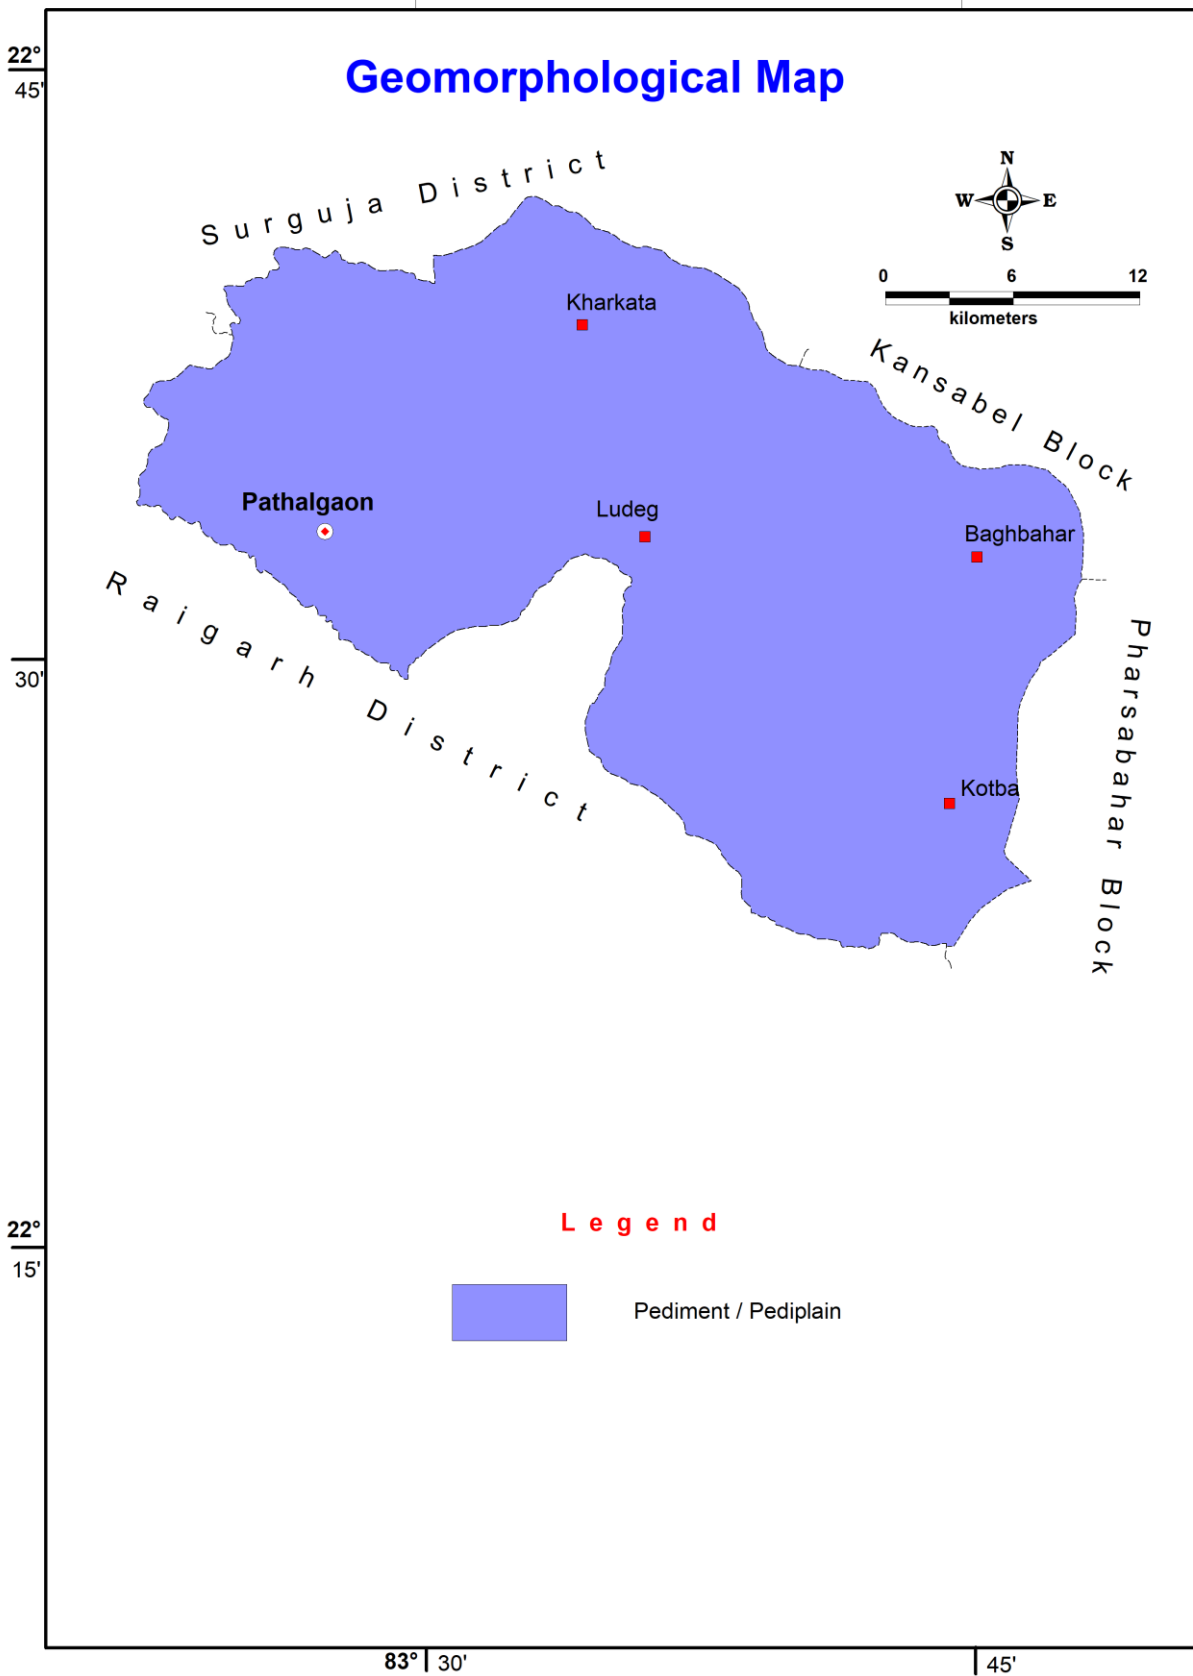


Figure 2 Geomorphological Map of the Block

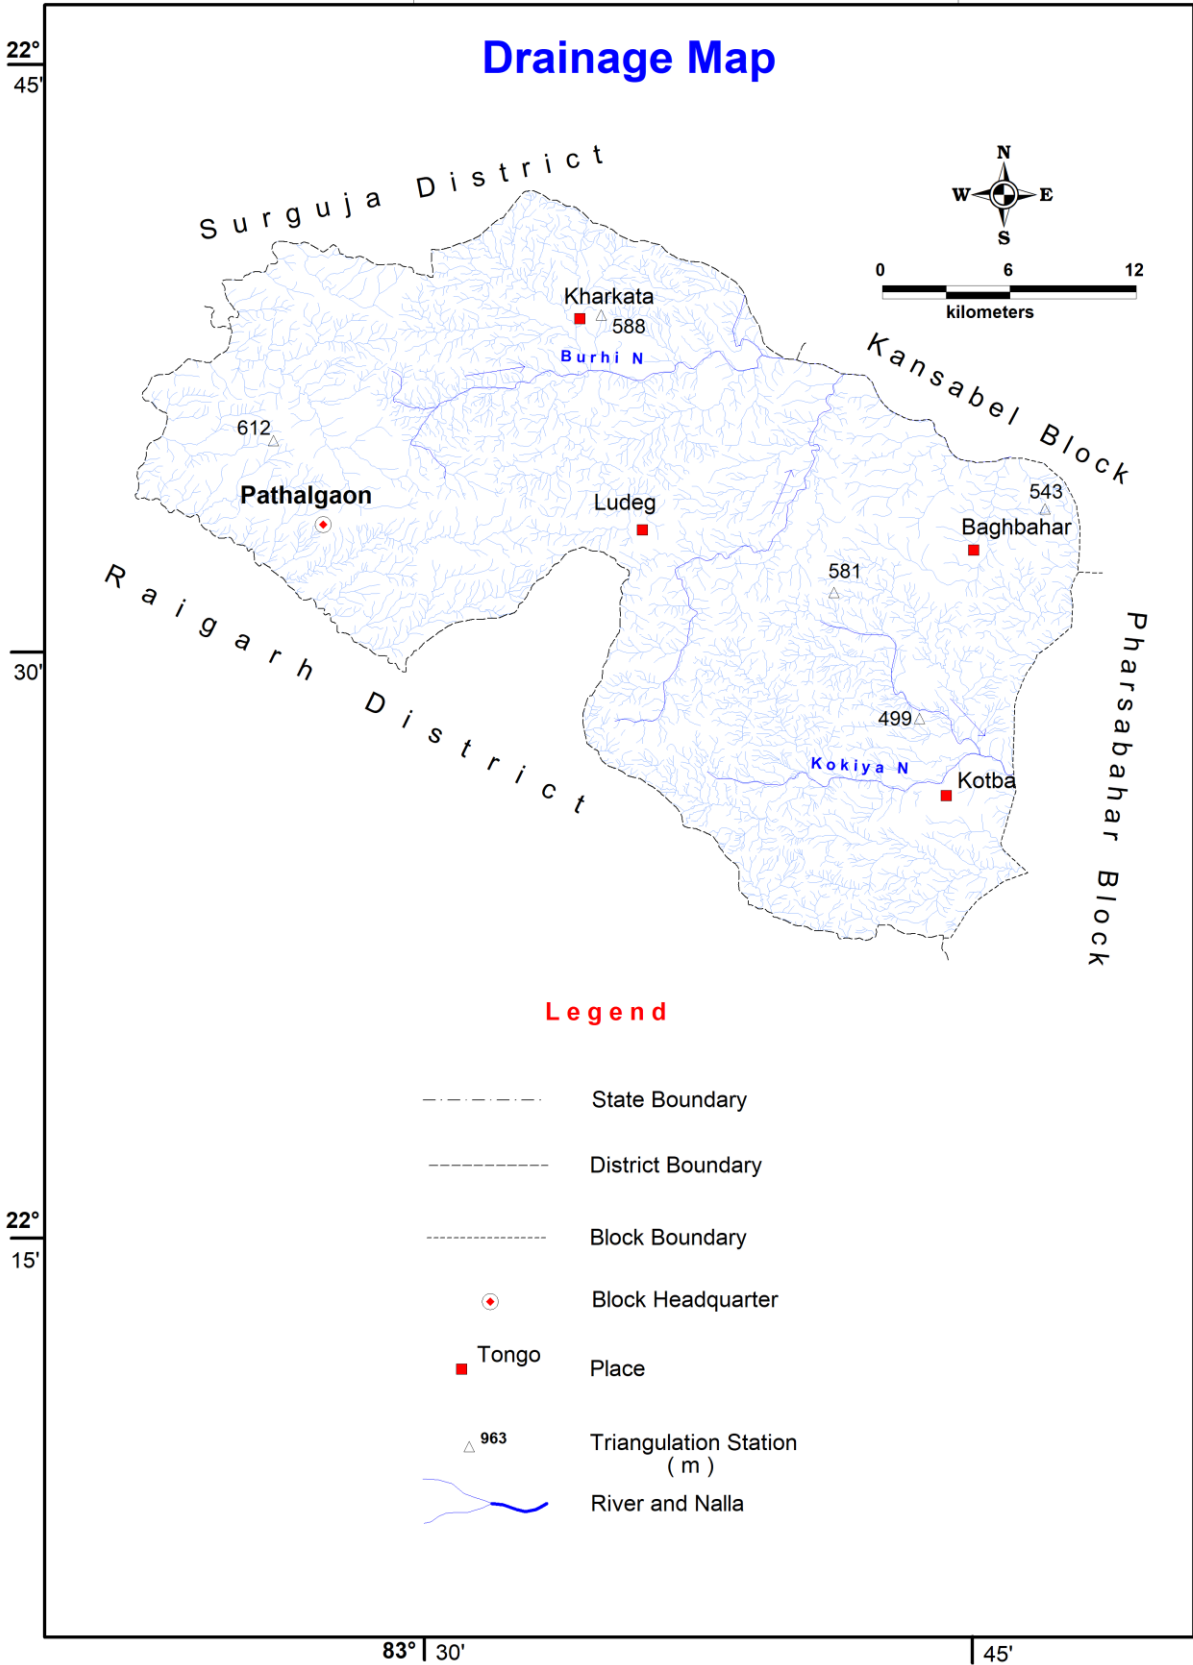


Figure 3 Drainage Map of the Block

1.5 Agriculture and Irrigation: Agriculture is practiced in the area during Kharif and Rabi season every year. During the Kharif, cultivation is done through rainfall while during the Rabi season; it is done through ground water as well as partly through surface water like canals and other sources. The groundwater abstraction structures are generally Dugwells, Borewells /tubewells. The principal crops in the block are Paddy, Wheat, Vegetables and pulses. In some areas, double cropping is also practiced. The agricultural pattern, cropping pattern and area irrigated data of Pathalgaon block is given in Table 3, 4, 5 & 6

Table 3 Land use and Agricultural pattern (in ha)

Total geographical area	Revenue forest area	Area not available for cultivation	Non-agricultural & Fallow land	Agricultural Fallow land	Net sown area	Double cropped area	Gross cropped area
71273	6439	6389	4660	220	49800	3611	53411

Table 4 Cropping pattern (in ha)

Kharif	Rabi	Cereal				Pulses	Tilhan	Fruits and Vegetables	Mirch Masala	Sugarcane
		Paddy	Wheat	Jowar & Maize	Others					
49753	3658	39396	144	404	17	5437	3520	4267	137	47

Table 5 Area irrigated by various sources (in ha)

No. of canals (private and Govt.)	Irrigated area	No. of bore wells/ Tube wells	Irrigated area	No. of dug wells	Irrigated area	No. of Ponds	Irrigated area	Irrigated area by other sources	Net Irrigated area	Gross irrigated area	% of irrigated area wrt. Net sown area
6	981	160	25	2281	400	142	73	989	2468	2534	5.09

Table 6 Statistics showing Irrigation by Ground water

Net Irrigated Area	Net Irrigated Area by ground water	Percentage of Area Irrigated by ground water
2468	425	17

1.6 Groundwater Resource Availability and Extraction: Based on the resource assessment made, the resource availability in aquifer wise in Pathalgaon block is given in the table-4.

Table 7 Ground Water Budget of Pathalgaon block in Ham

Ground Water Recharge (Ham)				Total Annual Ground Water (Ham) Recharge	Total Natural Discharges (Ham)
Monsoon Season		Non-monsoon season			
Recharge from Rainfall	Recharge from Other Sources	Recharge from Rainfall	Recharge from Other Sources		
2683.84	476.20	616.03	745.37	4521.44	452.15

Table 8 Ground Water Dynamic Resource (Unconfined Aquifer) of Pathalgaon block in Ham

Annual Extractable Ground Water Recharge (Ham)	Current Annual Ground Water Extraction (Ham)				Annual GW Allocation for Domestic Use as on 2025	Net Ground Water Availability for future use	Stage of Ground Water Extraction (%)	Categorization (OE/Critical/Semicritical/Safe)
	Irrigation Use	Industrial Use	Domestic Use	Total Extraction				
4069.29	2137.85	469.68	4.00	2611.53	525.25	1402.19	64.18	Safe

Table 9 Ground Water Static Resource (Unconfined Aquifer) and Dynamic Resource (Confined Aquifer) of Pathalgaon block in Ham

Static Resources Area (Ha)	Difference Piezometric Head (Pre-post) m	Storativity (S)	Dynamic Ground Water Resource of Confined Aquifer (Ham)	Bottom level of the top confining layer (m)	In storage Ground Water Resource of Unconfined Aquifer (Ham)	Sum of Dynamic GW (Confined Aquifer) and In storage GW (Unconfined Aquifer) resource (Ham)
79200	3.19	0.00025	89.78	200.00	3651.97	3741.75

Table 10 Total Resources in Pathalgaon Block (in MCM)

Block	Dynamic Resources (MCM)		Insitu Resources (MCM)		Total Resources (MCM)
	Aquifer I	Aquifer II	Aquifer I	Aquifer II	
Pathalgaon	40.69	0.9	36.52	145.93	224.04

1.7 Existing and Future Water Demand (2025): The existing draft for irrigation in the area is 2137.85 Ham while the total extraction for all uses is 2611.53 Ham. At present scenario to meet the future demand for water, a total quantity of 1402.19 ham of ground water is available for future use.

1.8 Water Level Behavior:

(i) Pre-monsoon water level: In the pre-monsoon period, it has been observed that in Pathalgaon block, water level in dugwells (phreatic aquifer) varies between 5.1 to 9.4 mbgl with average water level of 6.49 mbgl. Water level in semiconfined aquifer, varies between 11.85 to 8.43 mbgl with average water level is 10.14 mbgl.

Table 11 Phreatic aquifer Depth to Water Level in mbgl (Pre-monsoon)

Block Name	Phreatic Aquifer		
	Min	Max	Avg
Pathalgaon	5.1	9.4	6.49

Table 12 Semiconfined Aquifer Depth to Water Level in mbgl (Pre-monsoon)

Block Name	Semiconfined Aquifer		
	Min	Max	Avg
Pathalgaon	8.43	11.85	10.14

(ii) Post-monsoon water level: In the post-monsoon period, it has been observed that the water level varies from 2.32 to 4.89 mbgl with an average of 3.05 mbgl in phreatic aquifer. In semiconfined/fractured formation, the post monsoon water level variation range is 4.42 to 9.48 mbgl with average of 6.95 mbgl.

Table 13 Phreatic Aquifer Depth to Water Level in mbgl (Post-monsoon)

Block Name	Phreatic Aquifer		
	Min	Max	Avg
Pathalgaon	2.32	4.89	3.05

Table 14 Semiconfined Aquifer Depth to Water Level in mbgl (Post-monsoon)

Block Name	Semiconfined Aquifer		
	Min	Max	Avg
Pathalgaon	4.42	9.48	6.95

(iii) Seasonal water level fluctuation: The water level fluctuation data indicates that in Pathalgaon block, water level fluctuation in phreatic aquifer varies from 1.26 to 6.24 mbgl with an average fluctuation of 3.44 mbgl. Water level fluctuation in semiconfined Aquifer varies from 2.37 to 4.01 mbgl with an average fluctuation of 3.19 mbgl.

Table 15 Phreatic Aquifer Depth to Water Level Fluctuation in mbgl

Block Name	Semiconfined Aquifer		
	Min	Max	Avg
Pathalgaon	1.26	6.24	3.44

Table 16 Semiconfined Aquifer Depth to Water Level Fluctuation in mbgl

Block Name	Semiconfined Aquifer		
	Min	Max	Avg
Pathalgaon	2.37	4.01	3.19

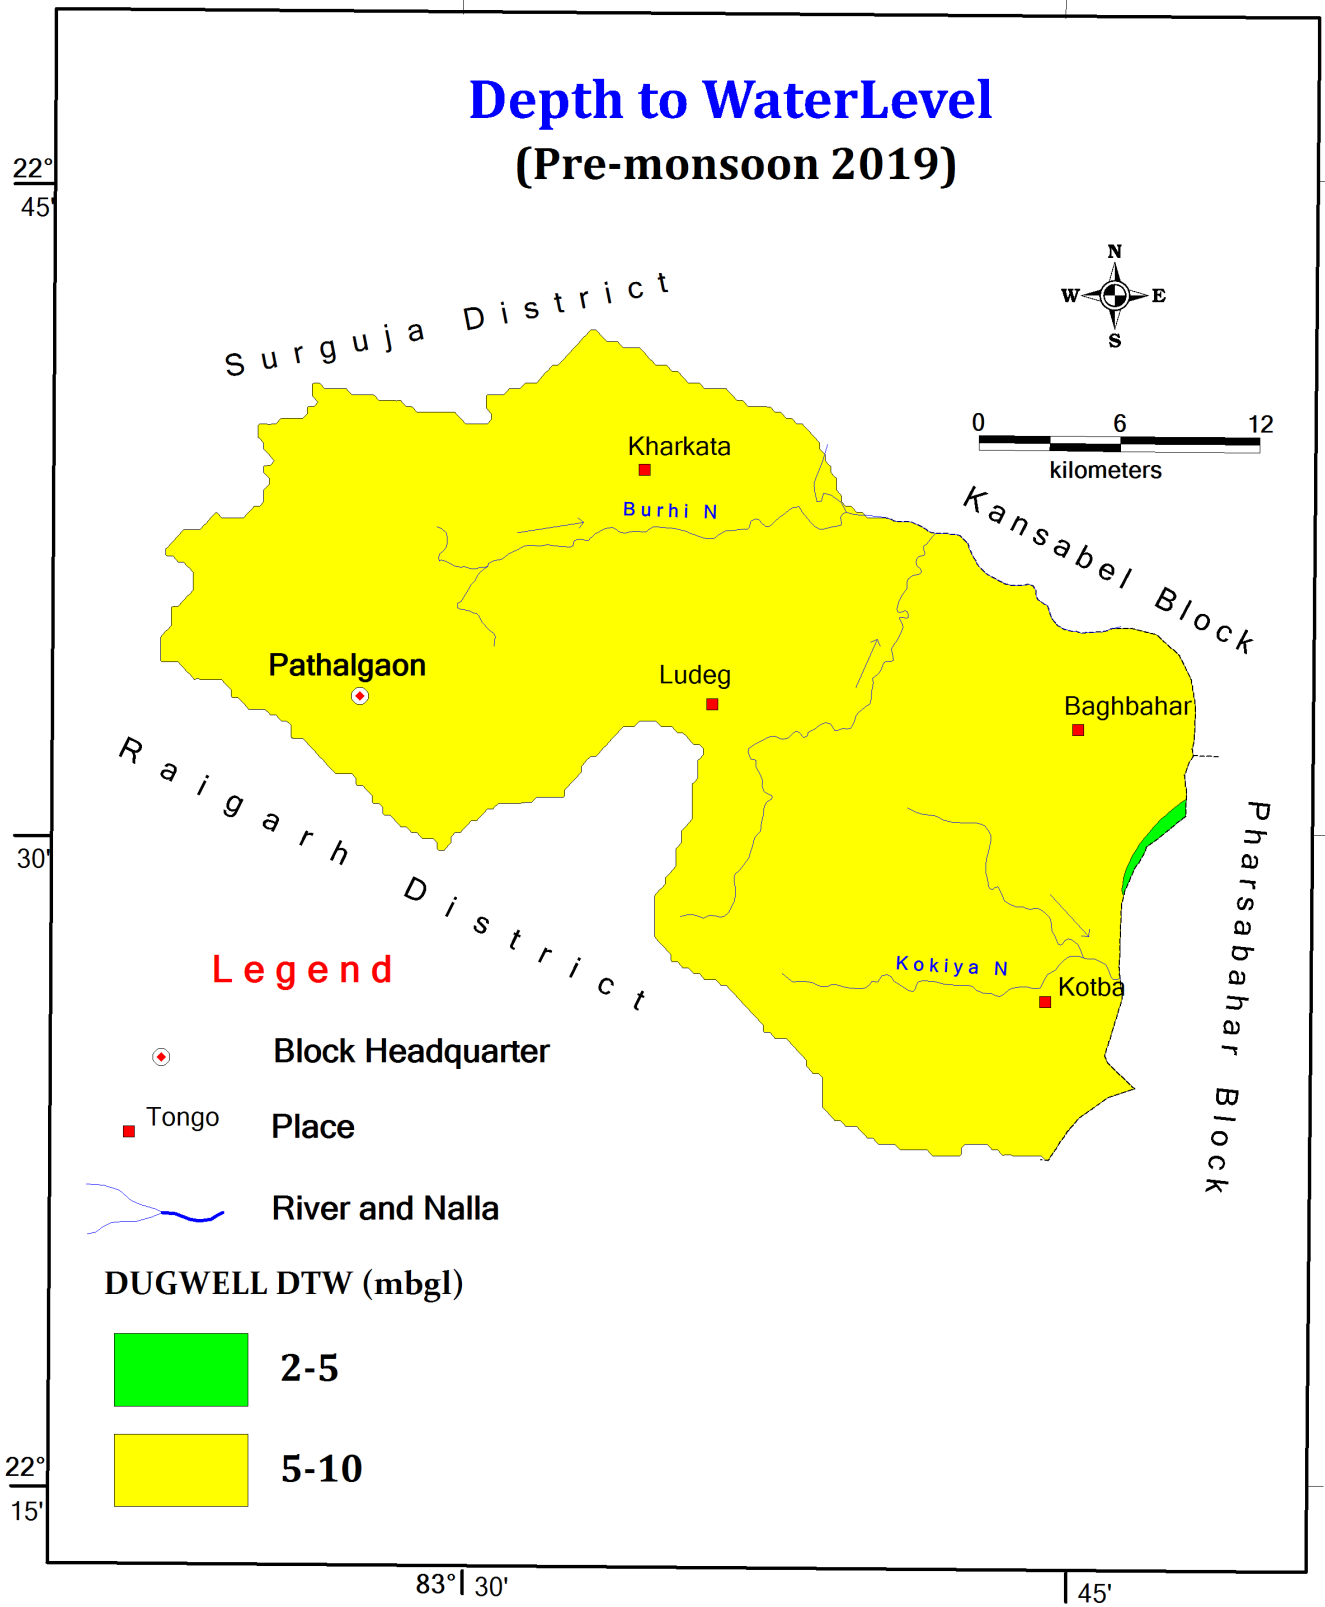


Figure 4 Pre-monsoon depth to waterlevel of Phreatic Aquifer

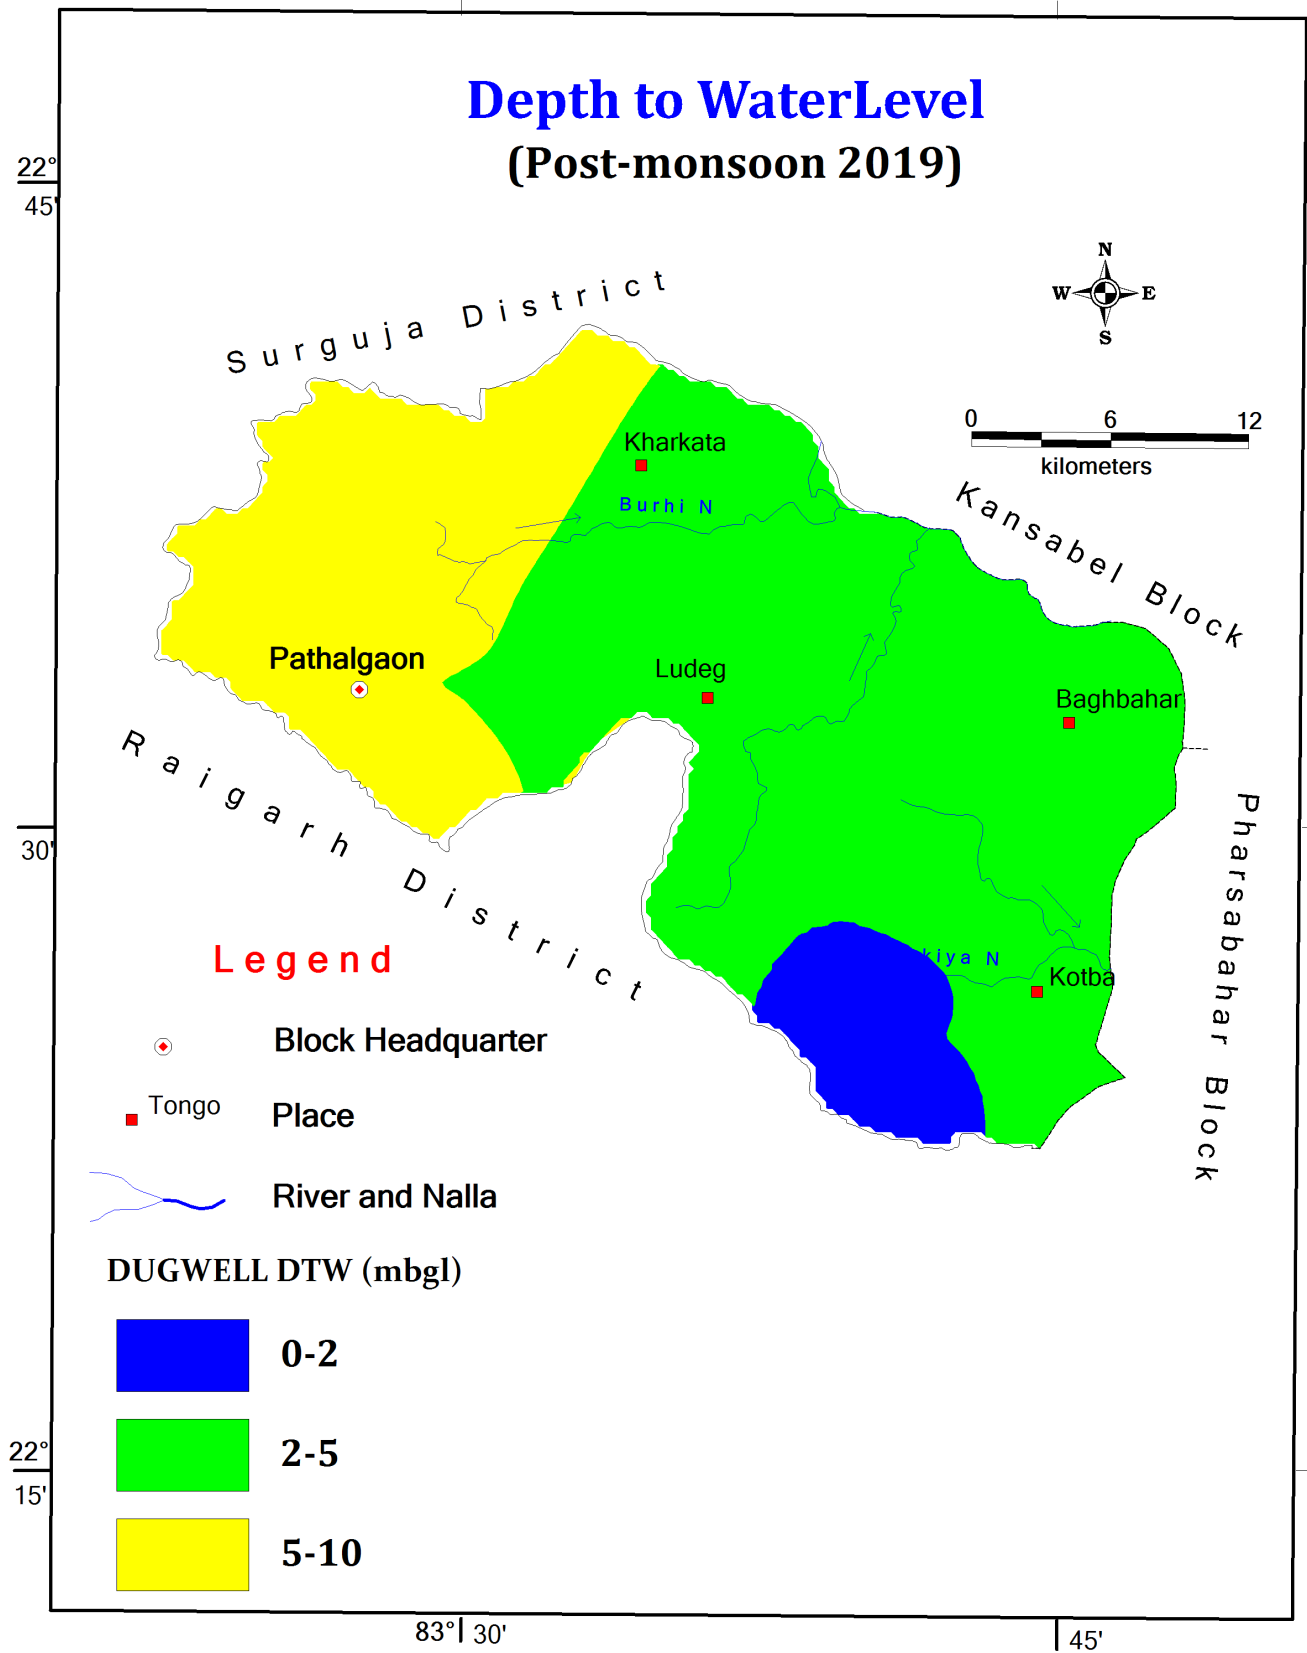


Figure 5 Post-monsoon depth to waterlevel of Phreatic Aquifer

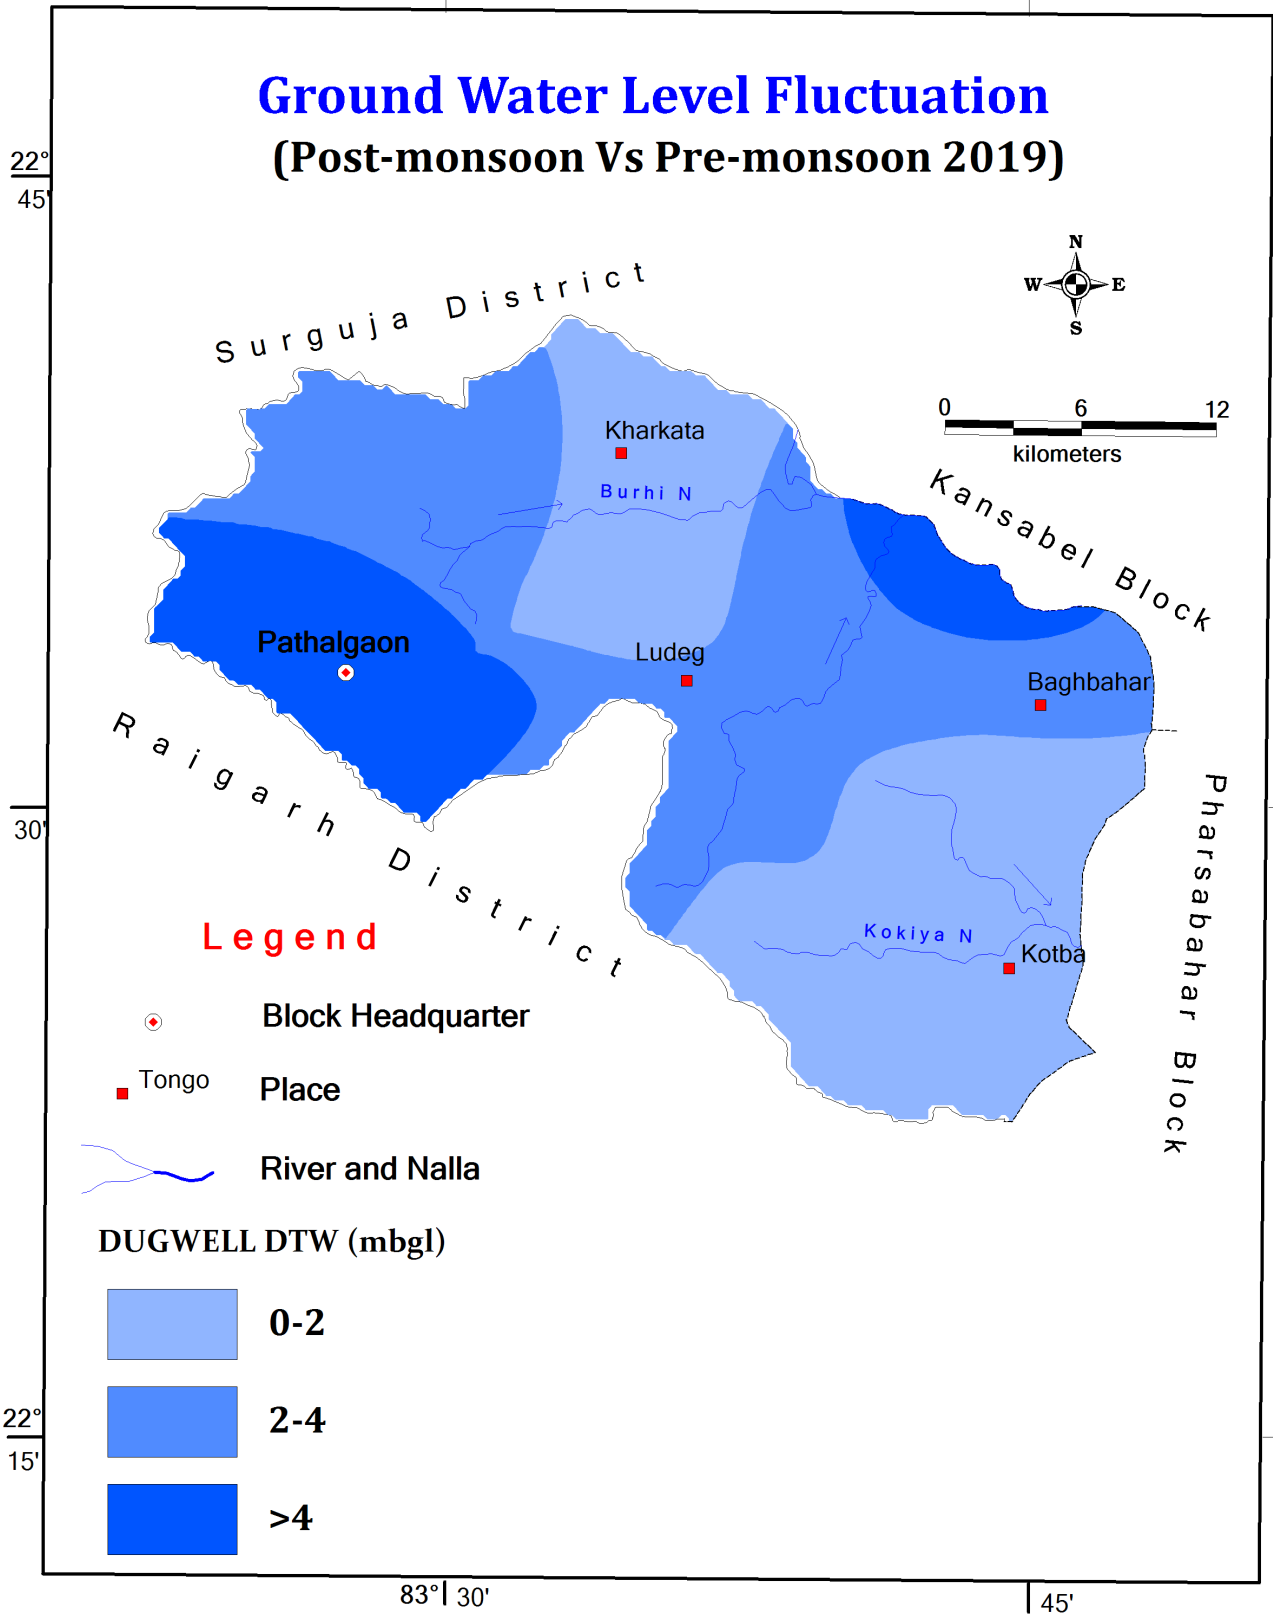


Figure 6 Seasonal waterlevel fluctuation of Phreatic Aquifer

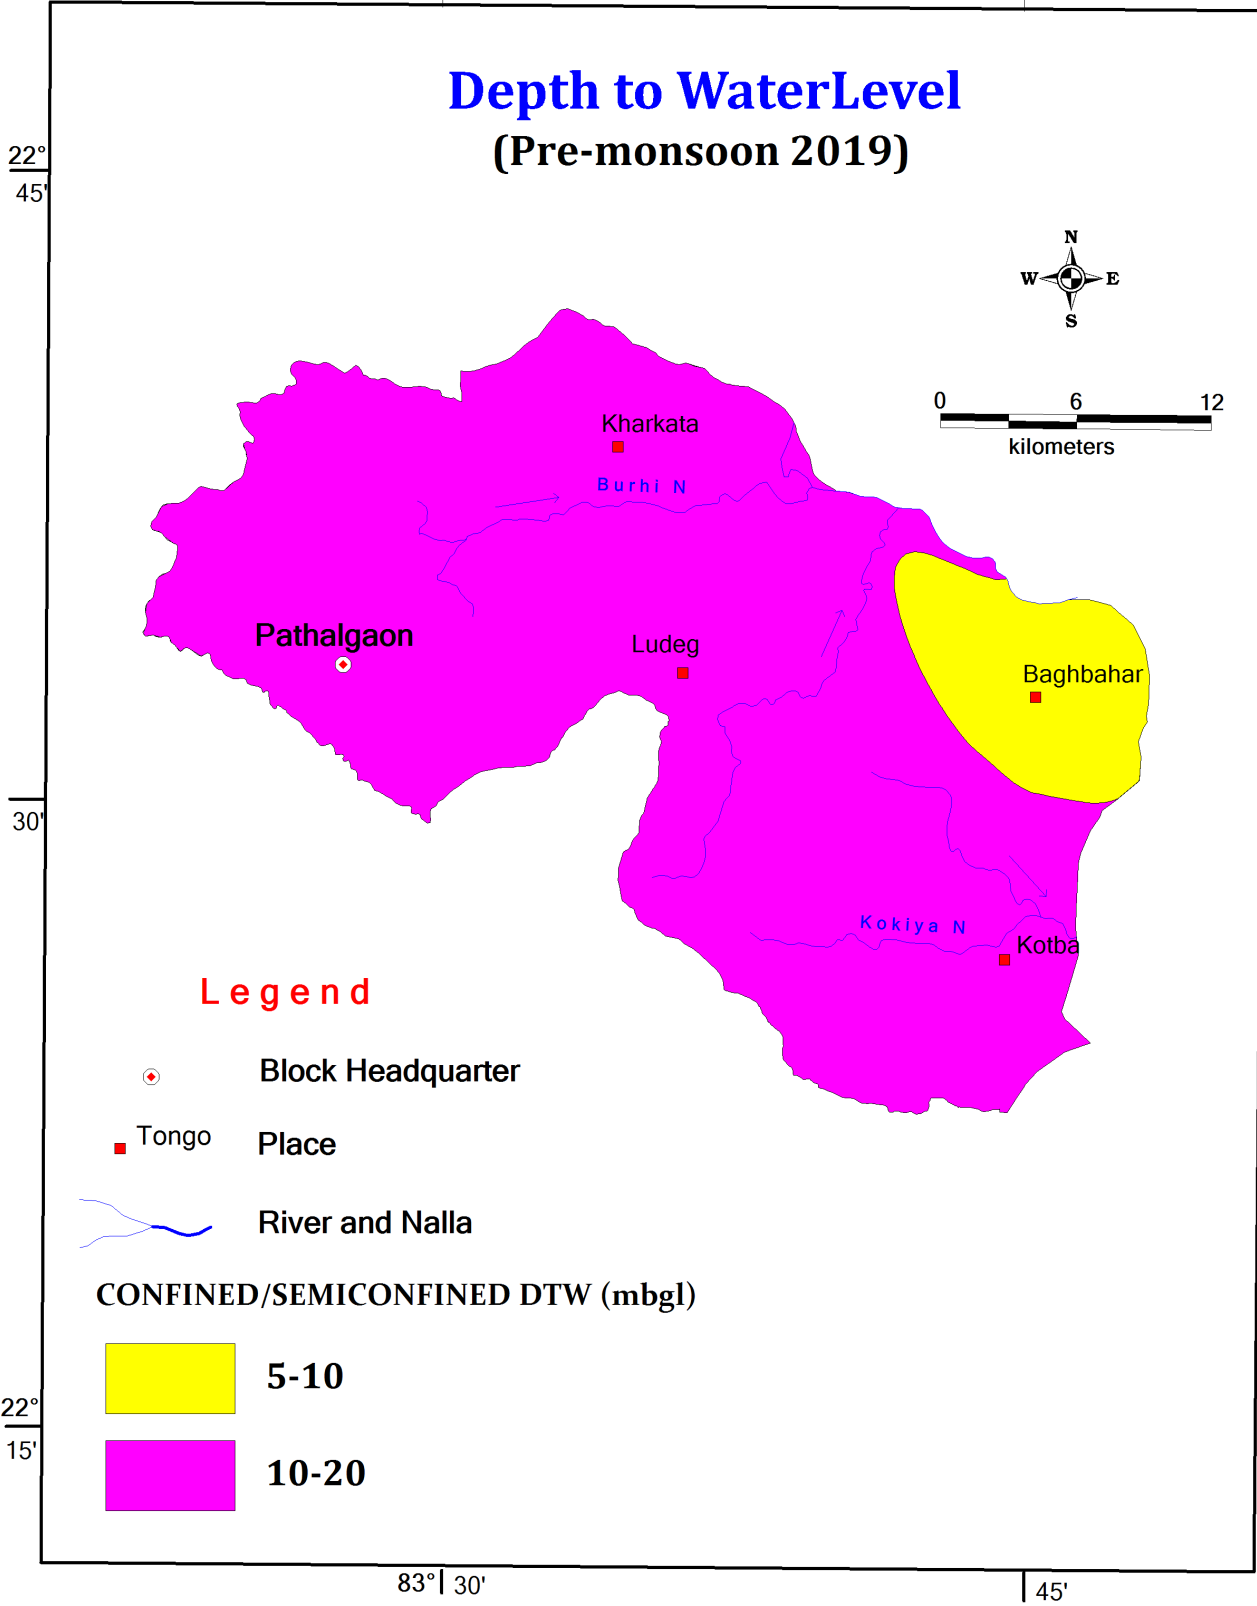


Figure 7 Pre-monsoon depth to waterlevel of Confined/Semiconfined Aquifer

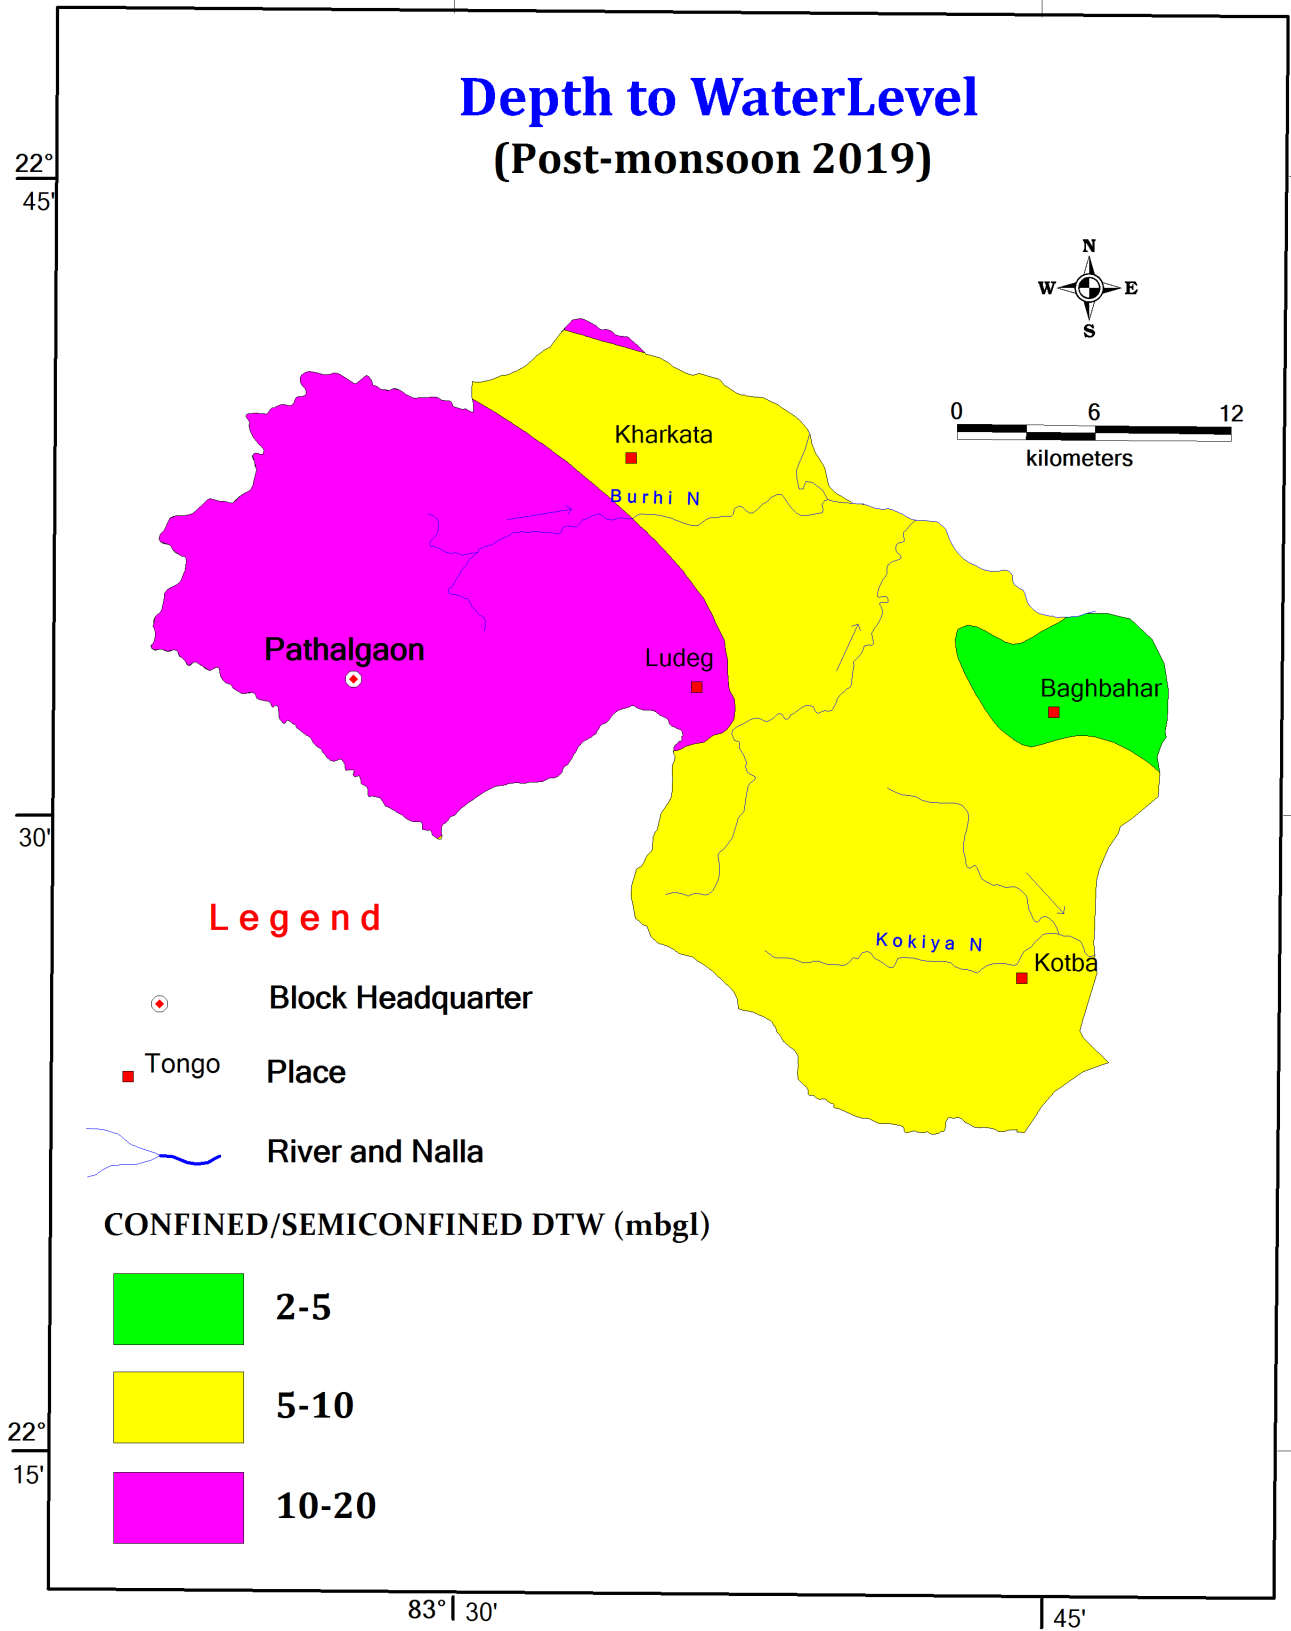


Figure 8 Post-monsoon depth to waterlevel of Confined/Semiconfined Aquifer

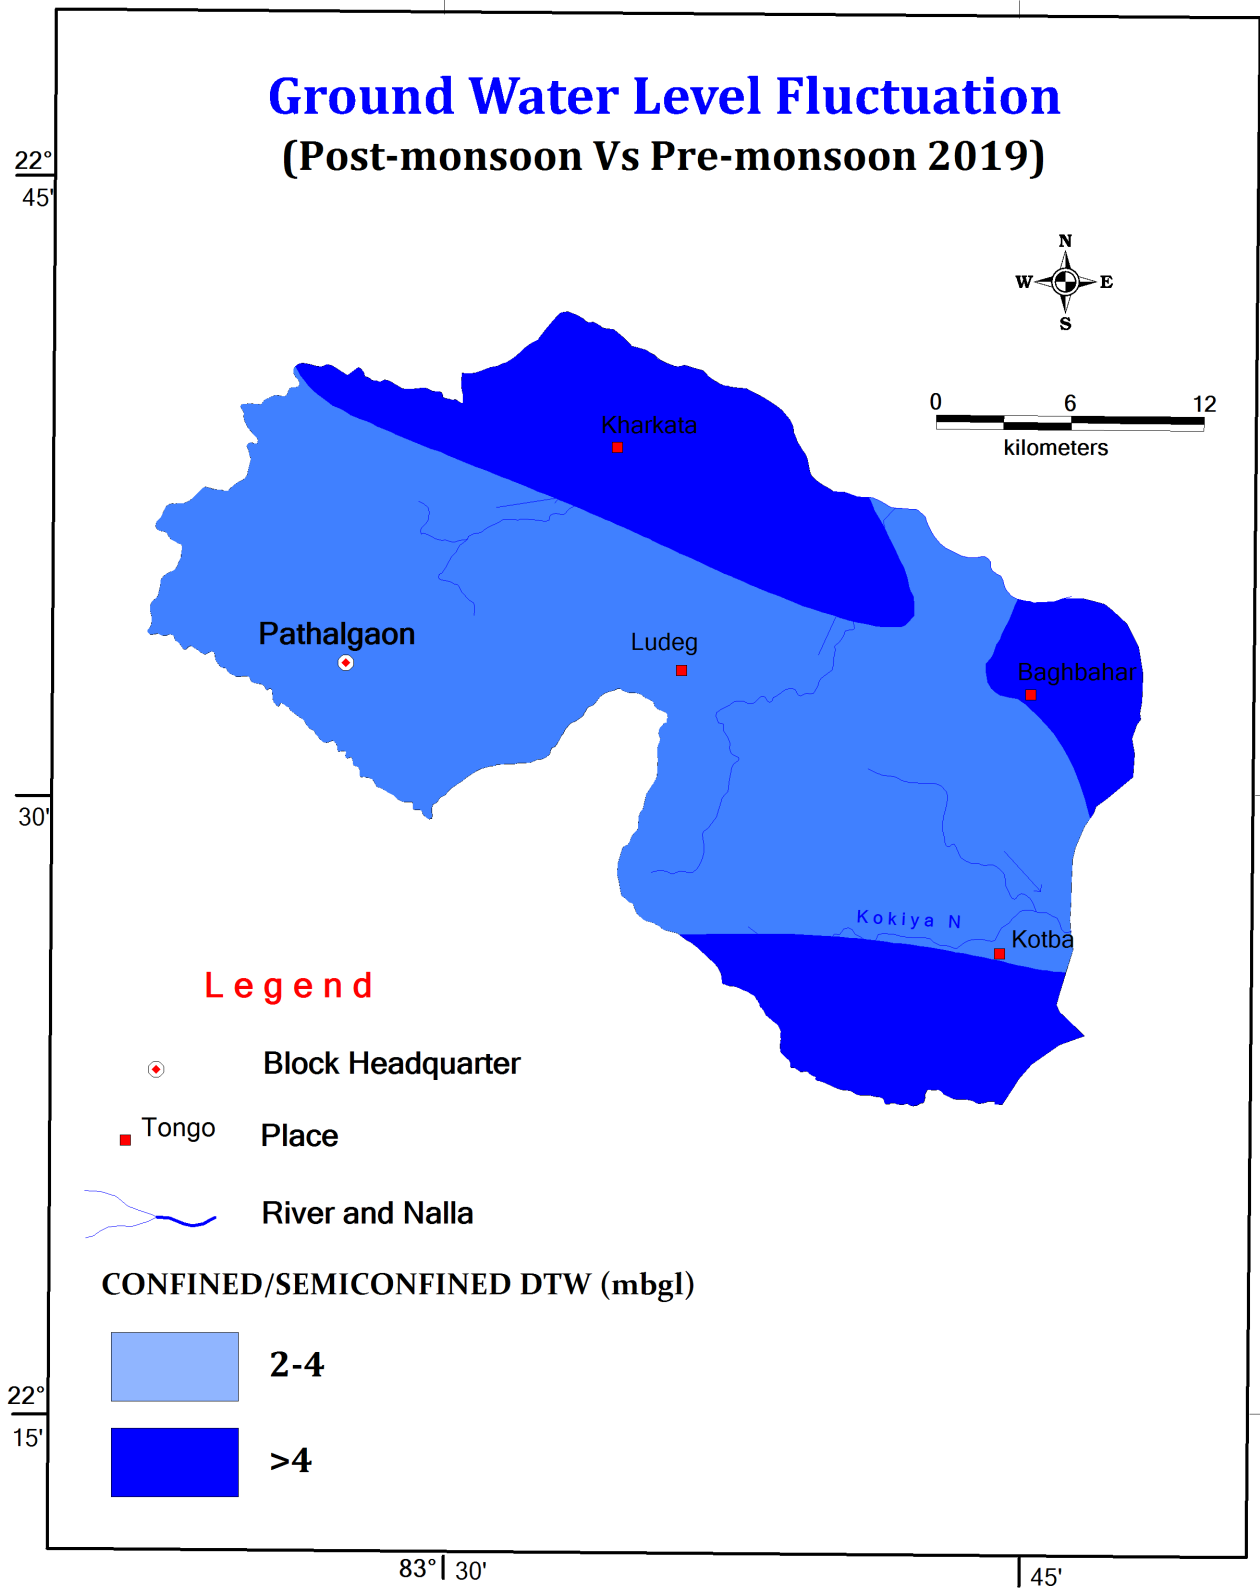


Figure 9 Sesonal waterlevel fluctuation of Confined/Semiconfined Aquifer

(iv) The long term water level trend: There is no significant decline in water level in pre and post monsoon

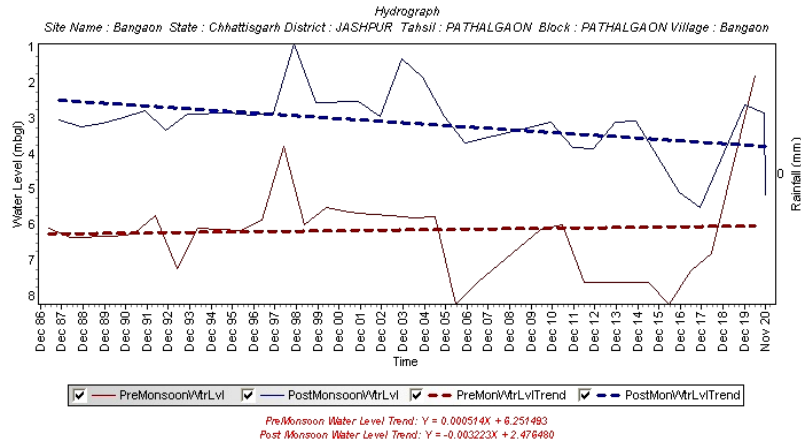


Figure 10 Hydrograph of Bangaon village, Pathalgaon block

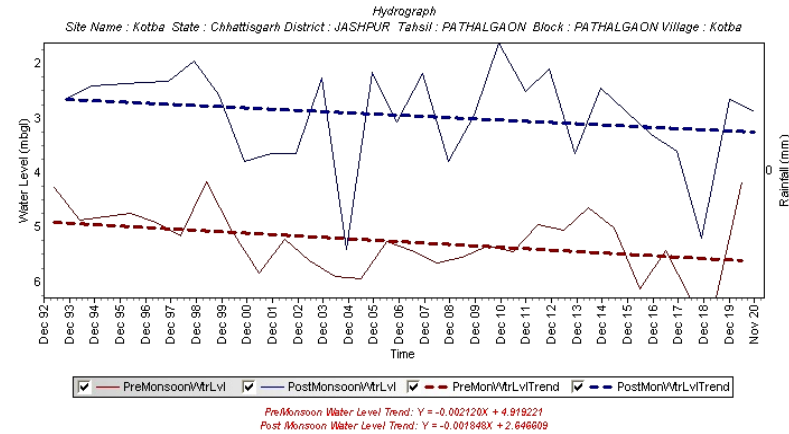


Figure 11 Hydrograph of Kotba village, Pathalgaon block

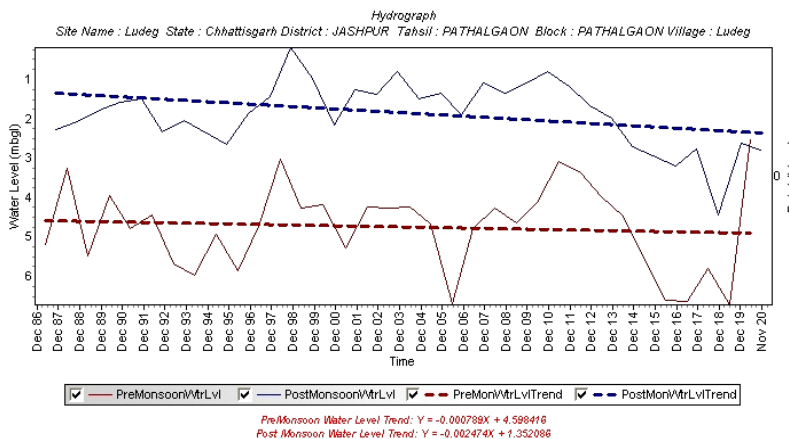


Figure 12 Hydrograph of Ludeg village, Pathalgaon block

2. AQUIFER DISPOSITION:

2.1 Number of Aquifers: There is only one major aquifer system viz. Granite Aquifer system. The aquifer system has the shallow aquifer and deeper aquifer which occurs in phreatic and semiconfined condition respectively.

Granite Aquifer System:

Groundwater occurrence is largely limited to secondary permeability, such as weathered zones, joints, fractures or faults. The potential of weathered zones depends on the degree and depth of weathering and associated fracturing, and the saturated thickness. The aquifers are generally discontinuous, and often confined. Higher yields are obtained where thick weathered zones are associated with bedrock fracturing. DTH drilling technique is preferred in Granite aquifer where well construction is required depending upon the thickness of weathered zone.

2.2 Aquifer wise Characteristics:

Table 17 Aquifer Characteristics of Pathalgaon block

CHARACTERISTICS	AQUIFER SYSTEM	
	Fractured Granite	Weathered Granite
Major Geological Formation	Chotanagpur Granite Geneiss	Chotanagpur Granite Geneiss.
Major Rock type	Granite Geneiss	Granite Geneiss
Avg Weathered Thickness (m)	-	17.04
Transmissivity (m²/day)	1 to 98	5 to 52
Average Drawdown (m)	39	21
Discharge	Negligible to 14 lps	10 to 100 m ³ /day
No. of Potential Zone	1 set < 50 m 1 to 2set: 50m to 100m 1 set: 100m to 200m (Most potential zone- 50 to 100m)	-


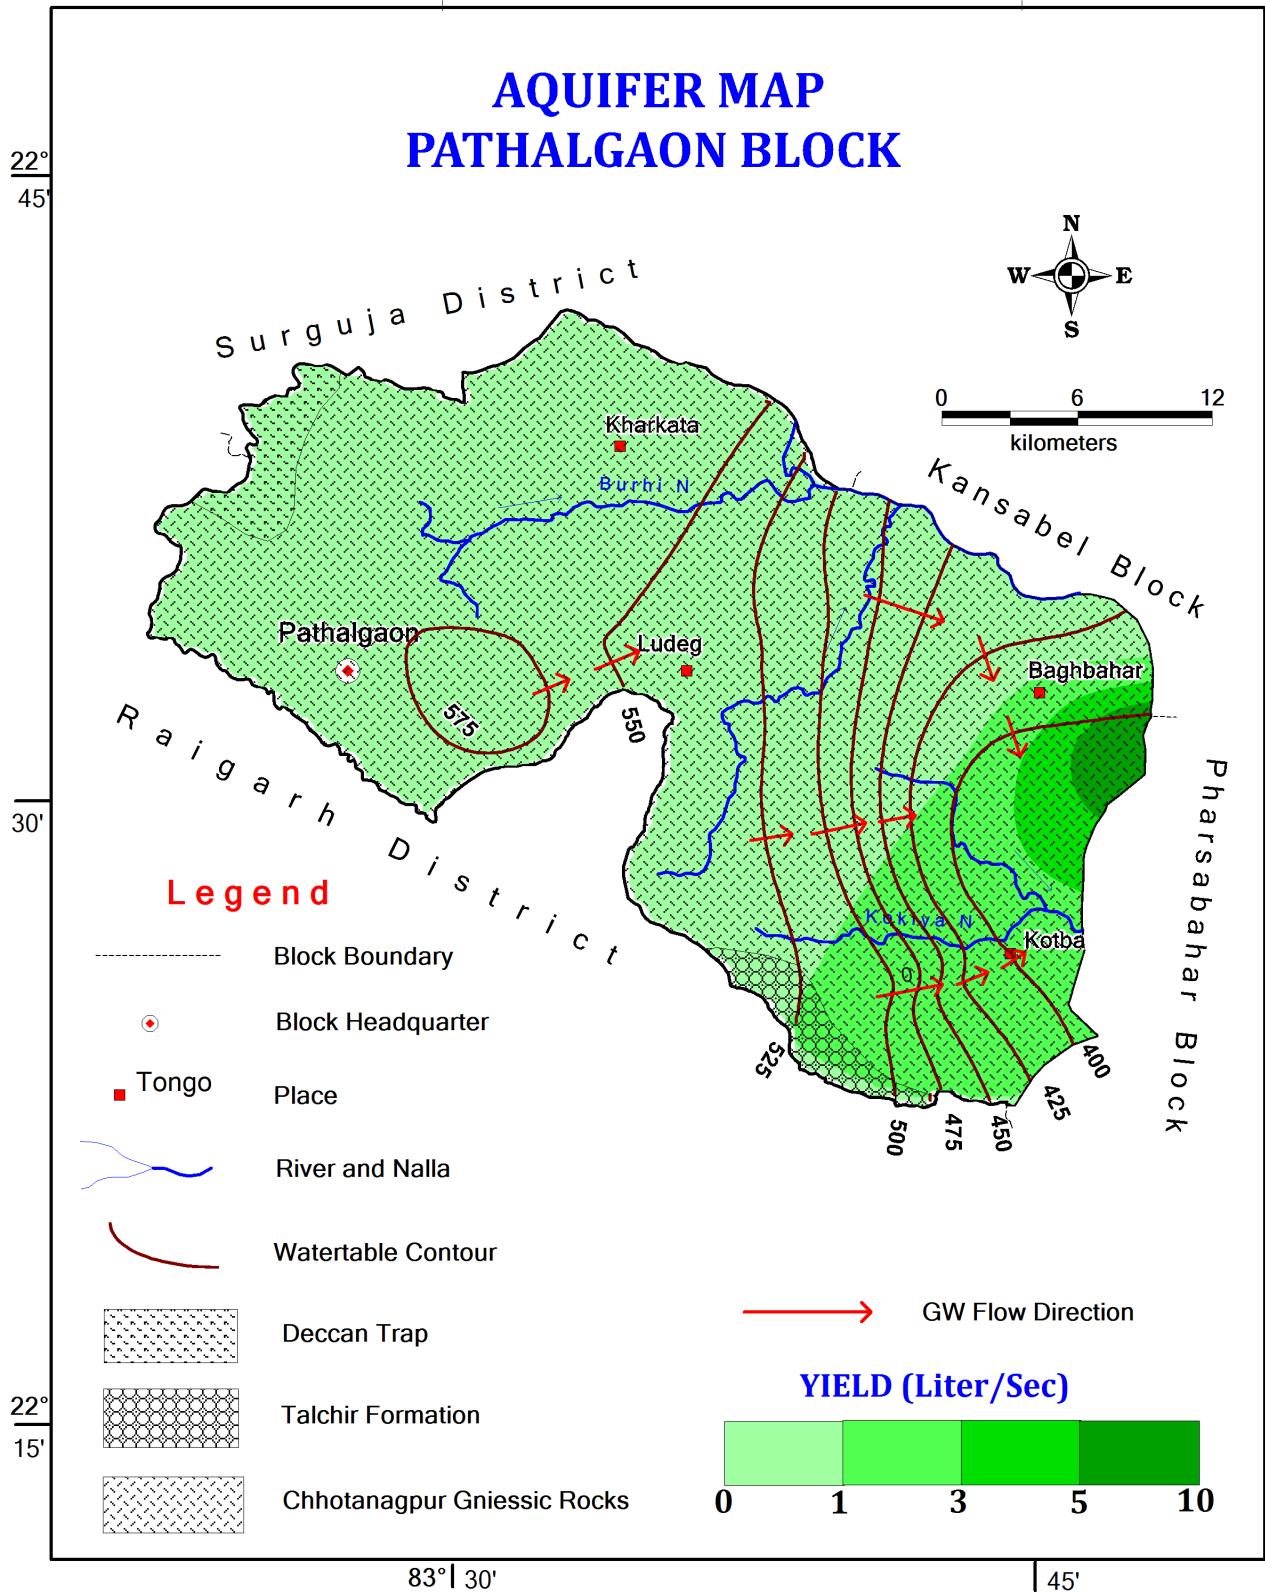


Figure 13 Aquifer map of Patalgaon block

Cross-Section A-A' (Block- Pathalgaon)

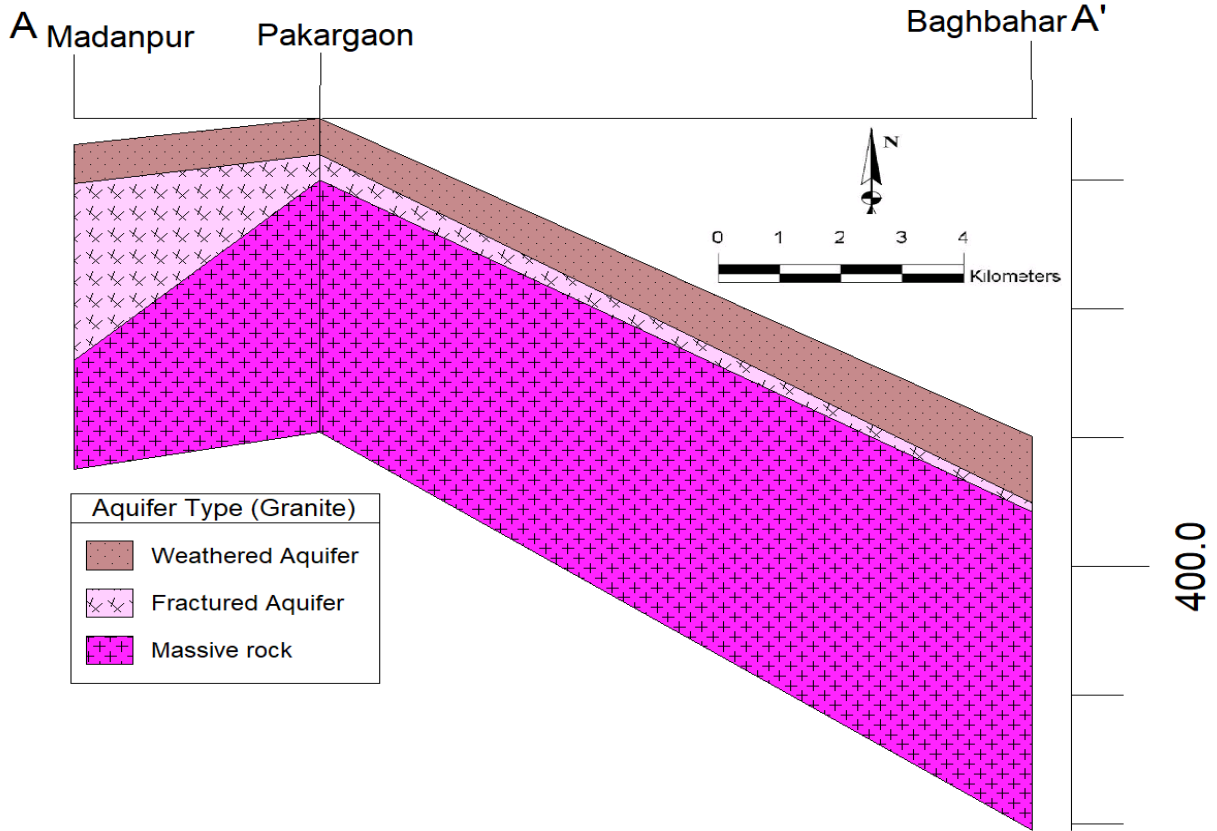

Cross-Section B-B' (Block- Pathalgaon)

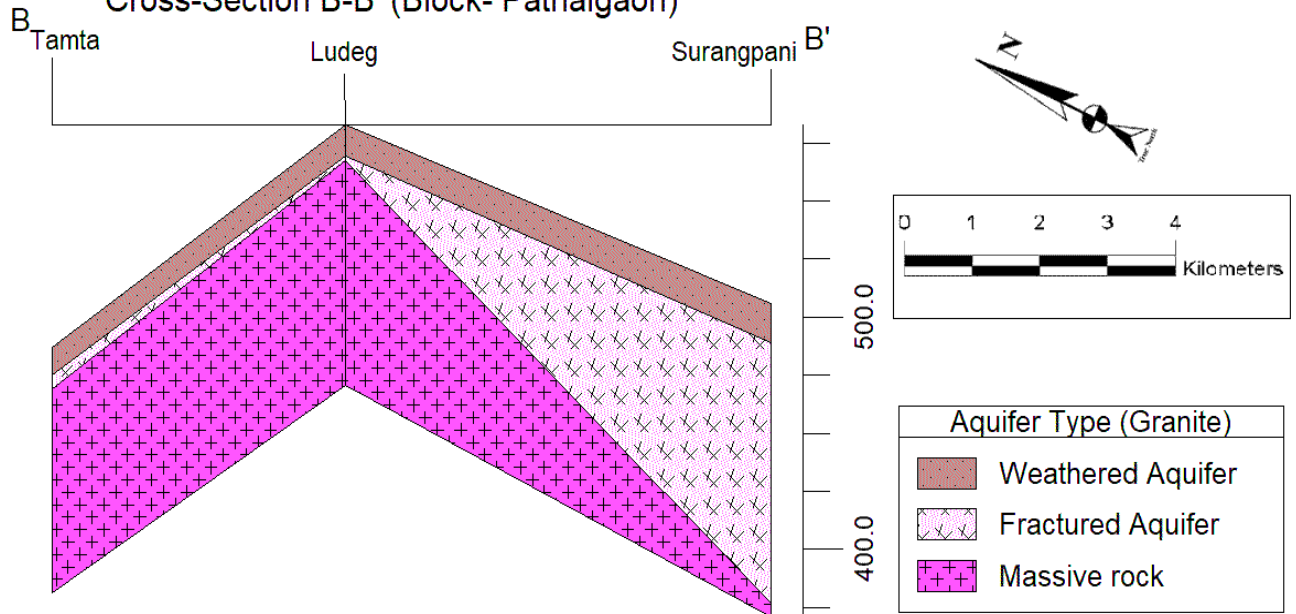


Figure 14 2D Cross-Section of Pathalgaon block

Disposition of Aquifer in Pathalgaon Block

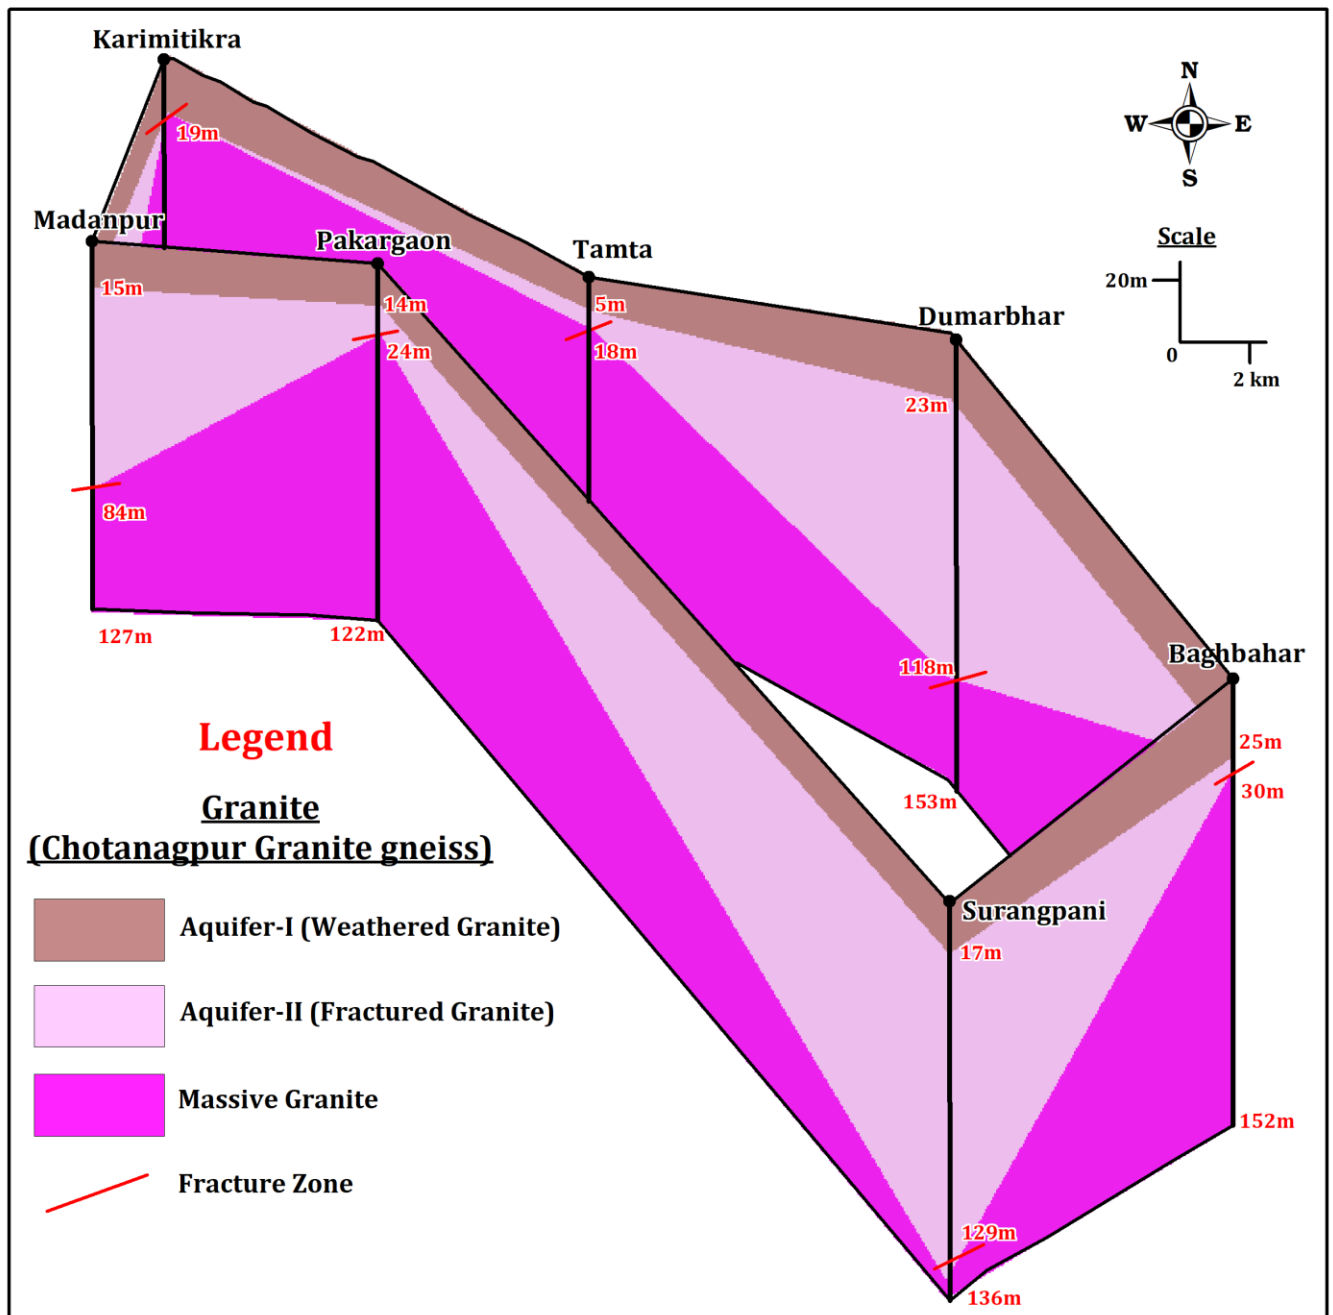


Figure 15 Fence diagram of Pathalgaon block

3. GROUND WATER RESOURCE, EXTRACTION, CONTAMINATION AND OTHER ISSUES:

3.1 Aquifer wise resource availability and extraction: Resource availability of Pathalgaon block is given in the Table 8 where net ground water availability for future use is 525.25 ham. The extraction details and the future scenario (2025) along with the categorisation are also depicted in the Table 8.

Table 18 Categorization of Assessment Unit

District	Block	Stage of Ground water development (%)	Categorisation
Jashpur	Pathalgaon	64.18	Safe

3.2 Categorisation: Pathalgaon block falls in safe category. The stage of Ground water development is 64.18 %. The Net Ground water availability is 1402.19 ham. The Ground water draft for all uses is 2611.53 Ham.

3.3 Chemical Quality of Ground water and Contamination: Throughout the study area, the water samples from both dugwell and handpumps were collected and chemical analysis has been completed. Villages like Kotba and Pathalgaon have found Nitrate (NO₃) and Magnesium (Mg) concentration more than of its permissible limit. Overall ground water of the study area is suitable for the drinking, agriculture and industrial purpose.

4. GROUND WATER RESOURCE ENHANCEMENT:

4.1 Aquifer wise space available for recharge and proposed interventions:

Table 19 Summarised detail of Volume of porous space available for recharge

Major Aquifer	Area Identified for Artificial Recharge (Sq. Km)	Sp. Yield for the formation	Volume of vadose zone available for recharge(mcm)	Sub surface storage potential (mcm)
Granite	72.7	0.008	109	2.22

5. ISSUES:

- (i) During summer, dugwells in villages becomes dry at many locations. Several handpumps also stop yielding water. The aquifer itself is a low yielding one.
- (ii) In Granite aquifer system potential zone for ground water is related with occurrence of fracture, so drilling a high yield well is always a challenge. Proper scientific study coupled with geophysical investigation may minimize the failure of well.
- (iii) High value of Fluoride and Iron has been reported from several locations.

6. MANAGEMENT PLAN:

- (i) It has been observed during fieldwork, there is colossal wastage of groundwater through private well and public water supply system. So, Information, Education and Communication (IEC) activities need to be organized to sensitize people on the issues of depleting groundwater resource. Massive awareness campaigns are essential to aware people about the importance of community participation in saving water.
- (ii) Desiltation of existing Tanks and Talabs to be carried out for efficient storage of rainwater. Also Rain water harvesting structures may be constructed in villages to reduce stress on groundwater.
- (iii) It has been observed that the demand of ground water is increasing for irrigation, industrial and domestic uses. At locations where water level is declining, we have to go for artificial recharge on a long-term sustainability basis. Artificial Recharge structures may be constructed at suitable locations especially in the areas where the water level remains more than 3m in the post-monsoon period in this block to arrest the huge non-committed run-off and augment the ground water storage in the area. The different types of artificial structures feasible in the block are described in Table 20

Table 20 Types of Artificial Recharge structures feasible

Name of Block	Area Feasible for recharge (sq.km)	Volume of Sub Surface Potential for Artificial recharge (MCM)	Types of Structures Feasible and their Numbers			
			Percolation tank	Nalas bunding cement plug/ check dam	Gravity head /Dug well/ tube well/Recharge shaft	Gully plugs Gabion structures
Pathalgaon	72.7	2.22	5	18	30	40
	Recharge Capacity (MCM)/structure		0.2192	0.0326	0.00816	0.0073

- (iv) Fluoride and Iron filter plant may be installed in the villages having higher value of contaminants.

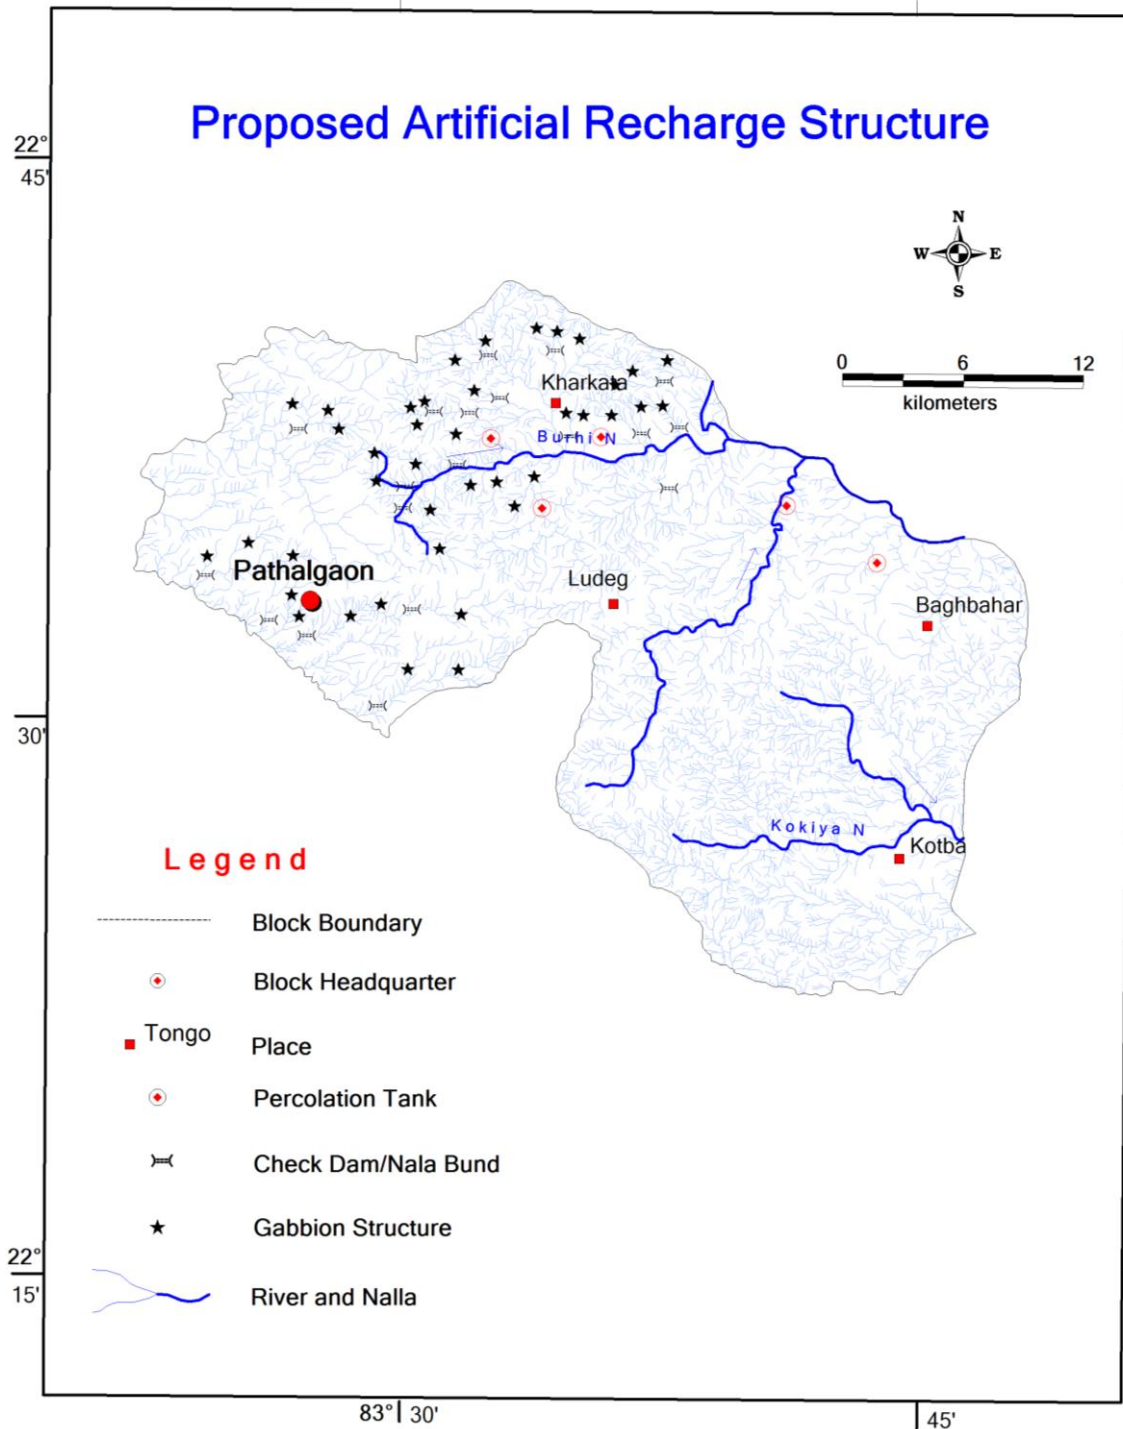


Figure 16 Location of proposed Artificial Recharge Structure

- (v) In urban areas STP may be installed for the treatment of sewage water in proper numbers to avoid contamination of ground water. Treatment of sewage water in village through soak pit for the individual houses and Sechewal model or similar model for

community level may be adopted to avoid contamination of ground water. Treated water may also be reused for irrigation and other industrial purposes.

- (vi) Since the stage of development in the block is 64.18 %. There is scope of utilizing more ground water for future irrigation purpose. Additional number of Ground water abstraction structure may be developed for the effective utilization of ground water resources in the block. The ground water is presently developed through dug wells and tube wells. Yield potential for the block has been shown in Aquifer map (Figure 12). Sites for wells need to be selected only after proper scientific investigation. The ground water quality also needs to be ascertained and the wells used for water supply should be first checked for Iron, Fluoride and other pollutants.

Table 21 Potential of Additional GW abstraction structure creation

Net GW availability (ham)	Stage of GW Development (%)	Present GW draft (Ham)	GW draft at 70% stage of development (ham)	Surplus GW at present Stage of Development (ham)	Number of TW Recommended in each block (Assuming unit draft as 1.6 ham/structure/year)	Number of DW Recommended in each block (Assuming unit draft as 0.72 ham/structure/year)
8366.71	4069.29	64.18	2611.53	2848.5	236.97	89

7. CONCLUSION:

For effective utilization of Ground water existing draft for irrigation may be coupled with micro irrigation system. Change in irrigation pattern, optimum use of available resource, use of ground water potential created after artificial recharge can lead to groundwater savings and increase in gross cropped area of the block (Table: 22).

Table 22 Detail of groundwater saved through change in cropping pattern and other interventions

Block	Existing Gross Ground Water Draft for Irrigation in Ham	Additional Saving of GW after using Micro Irrigation methods in Ham (Assuming 30 % saving)	GW Potential created after Artificial recharge structure in Ham	Development by new GW abstraction structure	Additional GW irrigation Potential created in Ham	Additional Irrigation potential creation for Maize/ wheat in winter season in Ha (Assuming 500 mm water requirement)	Percent increase in Crop area compare to Gross cropped area
Pathalgaon	2137.85	641.36	221.96	236.97	1100.29	2200.58	4.12%

